

09-28-00

A

THE COMMISSIONER OF PATENTS AND TRADEMARKS
Washington D.C. 20231
Box Patent Applications

Case Docket No. FUSA 17.792
Filed by Express Mail
(Receipt No. EL522335628US)
on September 27, 2000
pursuant to 37 CFR 1.10
by Lydia Gonzalez

S I R:

Transmitted herewith for filing is: ☐ a new application
☒ a continuation application of PCT/JP99/02673 filed May 21, 1999

Inventor(s): Kazutomo HASEGAWA; Hidetake ASAHINA; Seiji MIYOSHI;
Nobukazu KOIZUMI; Yutaka AWATA

For DIGITAL SUBSCRIBER LINE TRANSMISSION METHOD APPARATUS AND SYSTEM

Enclosed are:

- ☒ 41 sheets of drawings. (Figs. 1-6, 7A, 7B, 8A, 8B, 9-23, 24A, 24B, 25-32, 33A, 33B, 34-42)
☒ Specification, including claims and abstract (94 pages)
☐ Declaration
☐ An assignment of the Invention to _____
☐ A certified copy of _____ Application No(s). _____
☐ An associate power of attorney
☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27
☒ Post card
☐ Recording fee (as indicated below)
☒ Information Disclosure Statement, PTO-1449, copies of 5 references
☒ Other Preliminary Amendment
☒ Other International Search Report

	Col. 1	Col. 2
FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	23-20 =	3
INDEP CLAIMS	12-3 =	9
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

*If the difference in Col. 1 is less than zero, enter "0" in Col. 2

SMALL ENTITY	
RATE	FEE
	\$345
x 9 =	\$
X 39 =	\$
x 130 =	\$
TOTAL	\$

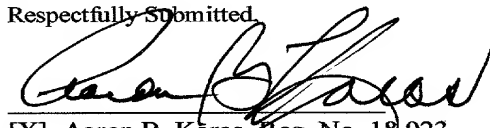
OTHER THAN A SMALL ENTITY	
RATE	FEE
	\$690
x 18 =	\$
x 78 =	\$
x 260 =	\$
TOTAL	\$

- ☐ Please charge our Deposit Account No. 08-1634 the amount of _____ to cover the filing fee and recording fee (if any)
- ☐ A check in the amount of \$ _____ to cover the filing fee and the recording fee (if any) is enclosed.
- ☐ The Commissioner is hereby authorized to charge payment of any fee associated with this communication or credit overpayment to Deposit Account No. 08-1634. A duplicate copy of this sheet is enclosed.

Helfgott & Karas, P.C.
60th Floor
Empire State Building
New York, New York 10118-6098
(212)643-5000

Date: 9/27/00

Respectfully Submitted,



- ☒ Aaron B. Karas, Reg. No. 18,923
☐ Samson Helfgott, Reg. No. 23,072
☐ Leonard Cooper, Reg. No. 27, 625
☐ Linda S. Chan, Reg. No. 42,400
☐ Jacqueline M. Steady, Reg. No. 44,354
☐ Harris A. Wolin, Reg. No. 39,432
☐ Brian S. Myers, Reg. No. 46,947

09/27/00
JC821 U.S. PTO

09/27/00
JC875 U.S. PTO
09/27/00

09671468-092700

THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Kazutomo HASEGAWA et al.

Filed : Concurrently herewith

For : DIGITAL SUBSCRIBER LINE TRANSMISSION METHOD
APPARATUS AND SYSTEM

Serial No.: Concurrently herewith

September 27, 2000

Hon. Commissioner of Patents
and Trademarks
Washington, D.C. 20231

PRELIMINARY AMENDMENT

S I R:

Prior to examination please amend the application as follows:

IN THE CLAIMS:

Please amend the following claims:

Claim 3, line 1, change "according to claims 1 or 2"
to --claim 1--.

Claim 8, line 1, change "according to claim 6 or 7"
to --claim 6--.

Claim 15, line 1, change "according to claim 13 or 14"
to --claim 13--.


R E M A R K S

This amendment is being submitted to avoid improper
multiple dependent claims.

09/27/00 2:54:30 PM

Favorable consideration is respectfully solicited.

Respectfully submitted,


Aaron B. Karas
Reg. No. 18,923

HELFGOTT & KARAS
EMPIRE STATE BUILDING - 60th Floor
NEW YORK, NEW YORK 10118-6098
(212) 643-5000
DOCKET NO.: FUSA17.792
Lhh:preliminary

Filed Via Express Mail

Rec. No.: EL522335628US

On: September 27, 2000

By: Lydia Gonzalez

Any fee due as a result of
this paper, not covered by an
enclosed check may be charged
on Deposit Acct. No. 08-1634.

00447950

SPECIFICATION

TITLE OF THE INVENTION

DIGITAL SUBSCRIBER LINE TRANSMISSION METHOD, APPARATUS
AND SYSTEM

5 CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation-in-part of
copending International application of international
Ser.No. PCT/JP99/02673 filed on May 21,1999,the
disclosure of which is hereby incorporated by
10 reference.

BACKGROUND OF THE INVENTION

This invention relates to a digital subscriber line
transmission method, apparatus and system in which a
subscriber line (referred to as a "metallic line" below)
15 connecting a subscriber exchange and a subscriber
terminal is utilized as a high-speed data communication
line. More particularly, the invention relates to a
digital subscriber line transmission method, apparatus
and system, which is based upon ISDN ping-pong
20 transmission or TDD-xDSL transmission, used in a
periodic crosstalk noise environment.

Multimedia services such as the Internet have
become widespread throughout society inclusive of the
ordinary home and there is increasing demand for early
25 provision of economical, highly reliable digital
subscriber line transmission systems and apparatus for
utilizing these services.

·xDSL technology

0074460 092700

5 xDSL is a transmission scheme that utilizes a telephone
line and is one modulation/demodulation technique. xDSL
is broadly divided into symmetric xDSL and asymmetric
xDSL. In symmetric xDSL, the upstream transmission rate
from the subscriber residence (referred to as the
0 "subscriber side" below) to the accommodating office
(referred to as the "office side" below) and the
downstream transmission rate from the office side to the
subscriber side are symmetrical; in asymmetric xDSL, the
upstream and downstream transmission rates are
5 asymmetrical.

A typical example of asymmetric xDSL is ADSL (Asymmetric DSL) and typical examples of symmetric xDSL are HDSL (High-bit-rate DSL) and SHDSL (Single-pair High-bit-rate DSL). VDSL (Very high-bit-rate DSL) is available as an xDSL technique that is capable of being utilized as both an asymmetric and symmetric DSL. A modulation scheme such as DMT (Discrete Multitone) or CAP (Carrierless Amplitude Phase modulation), etc., is being used for each xDSL system. Examples of ITU-T recommendations concerning ADSL are G.dmt and G.lite, in which the downstream transmission rates are on the order of 6 Mbps and 1.5 Mbps, respectively. Both of these adopt DMT modulation as the modulation method.

DMT modulation

DMT modulation will be described taking G.dmt as an example. The description will relate only to modulation/demodulation in the downstream direction from the office side to the subscriber side.

With DMT modulation, as shown in Fig. 29, a frequency band of 1.104 MHz is divided into $M(=255)$ -number of multicarriers #1 ~ #255 at intervals of $\Delta f (= 4.3125 \text{ KHz})$. In training carried out before communication, the S/N ratios of the respective carriers #1 ~ #255 are measured and it is decided, depending upon the S/N ratios, with which modulation method among 4-QAM, 16-QAM, 64-QAM, 128-QAM ... modulation methods data is to be transmitted in each carrier. For example, 4-QAM is assigned to a carrier having a small S/N ratio and 16-QAM, 64-QAM, 128-QAM ... are assigned successively as the S/N ratio increases. It should be noted that 4-QAM is a modulation scheme in which two bits are transmitted at a time, 16-QAM a modulation scheme in which four bits are transmitted at a time, 64-QAM a modulation scheme in which six bits are transmitted at a time, and 128-QAM a modulation scheme in which seven bits are transmitted at a time. Among schemes in which signals are transmitted simultaneously in upstream and downstream directions, a frequency-division transmission scheme uses carriers #1 ~ #32 of the 255 carriers for the upstream direction from the subscriber side to the office side, and uses carriers

002250" 0947960

Fig. 30 is a functional block diagram of a subscriber line transmission system based upon DMT modulation. Entered transmission data addressed to a subscriber is stored in an amount conforming to the time for one symbol ($= 1/4000$ sec) in a serial-parallel conversion buffer (Serial-to-Parallel Buffer) 10. The stored data is divided into transmission bit counts per carrier decided and saved in a transmit bitmap 60 by training in advance. The divided data is then input to an encoder 20. More specifically, since the QAM modulation scheme of each carrier is known from training, one symbol's worth of a bit sequence is divided b_k bits at a time, where the bit count b_k conforms to the QAM modulation scheme of each carrier, and the bits are input to the encoder 20. As a result, the total number of output bits per symbol is $\sum b_k$ ($k = 1 \sim M$). The encoder 20 converts each carrier corresponding to an input bit sequence to signal-point data (signal-point data on a constellation diagram) for performing quadrature amplitude modulation (QAM) and inputs the converted data to an Inverse Fast-Fourier Transform (IFFT) unit 30. The IFFT unit 30 applies

quadrature amplitude modulation to each signal point by performing an IFFT operation and inputs the processed data to a parallel-to-serial conversion buffer (Parallel-to-Serial Buffer) 40. Here a total 32 samples, namely IFFT output samples 480 ~ 511, are duplicately attached to the beginning of a DMT signal as a cyclic prefix (the details of which will be described later). The parallel-to-serial conversion buffer 40 inputs 512 + 32 items of sample data to a D/A converter 50 successively in serial fashion. The D/A converter 50 converts the input digital data to an analog signal at a sampling frequency of 2.208 MHz and sends the analog signal to the subscriber side via a metallic line 70.

On the subscriber side, an A/D converter 80 converts the input analog signal to a 2.208-MHz digital signal and inputs the digital signal to a time domain equalizer (TEQ) 90. The latter applies processing to the input digital data in such a manner that inter-symbol interference (ISI) will fall within the cyclic prefix of 32 symbols, and inputs the processed data to a serial-to-parallel conversion buffer 100. The latter stores one DMT symbol's worth of data and subsequently removes the cyclic prefix and inputs one DMT symbol's worth of data to a fast-Fourier transform (FFT) unit 110 simultaneously in parallel fashion. The FFT unit 110 implements a fast-Fourier transform and generates (demodulates) 255 signal points. A frequency domain equalizer (FEQ) 120 subjects the demodulated 255 items

004250" 092700

of signal-point data to inter-channel interference (ICI) compensation. A decoder 130 decodes the 255 items of signal-point data in accordance with a receive bitmap 150, which has values identical with those of the transmit bitmap 60, and stores the data obtained by decoding in a parallel-to-serial conversion buffer 140. The data is subsequently read out of this buffer in the form of a bit serial. This data constitutes the receive data.

10 ·Crosstalk from ISDN ping-pong transmission

ISDN time compression multiplexing (TCM) which is referred to as ISDN ping-pong transmission separates transmit and receive intervals in time-shared fashion (the total of one transmit interval and one receive interval is 2.5 ms) and makes the transmit and receive timings the same for all neighboring devices. With ISDN ping-pong transmission, 2B+D 144-kbps transmit data is demarcated every 2.5 ms, compressed to 320 kbps by rate conversion and transmitted in the transmit interval. As

15

20 a consequence, the frequency band of ISDN ping-pong transmission overlaps the frequency band of ADSL (or of G.dmt), as shown in Fig. 31. Already existing telephone lines have a design optimized to a frequency band of about 200 Hz ~ 3.4 kHz, which is the frequency of the

25 human voice. If ADSL and ISDN high-frequency signals are passed through such telephone lines, the fact that the lines are bundled together as shown in Fig. 32 allows the ISDN signal to leak into the ADSL telephone

004450 09200

the ATU-R. In comparison with NEXT, FEXT has a fairly low level. Thus, in ADSL communication, it is necessary to reduce the effects of NEXT.

As mentioned above, when an ISDN ping-pong
5 transmission line is close to an ADSL, the ADSL is influenced by TCM crosstalk (Time compression multiplexing crosstalk) from the ISDN ping-pong transmission line in a manner set forth below. In accordance with ISDN ping-pong transmission, the office
10 side transmits the downstream data in the first-half cycles of 400 Hz in sync with an ISDN 400-Hz signal TTR which is TCM-ISDN timing reference as shown in Fig. 34, and the subscriber side transmits the upstream data in the second-half cycles after it receives the downstream
15 data. The ADSL unit ATU-C on the office side, therefore, is influenced by near-end crosstalk ($NEXT_1$) from the ISDN in the first-half cycles of 400 Hz and is influenced by far-end crosstalk ($FEXT_1$) from the upstream data of the ISDN on the subscriber side in the second-
20 half cycles.

In a manner converse with respect to the office side, the ADSL unit ATU-R on the subscriber side is influenced by $FEXT_2$ in the first-half cycles of 400 Hz and is influenced by $NEXT_2$ in the second-half cycles.
25 The time intervals in which the effects of NEXT and FEXT are received shall be referred to as NEXT and FEXT intervals, respectively. Fig. 34 illustrates the NEXT and FEXT intervals on the subscriber side.

004438 09200
004250 0947950

·Sliding-window method

004260" 3947360

A "sliding-window method" has been proposed in the specification of Japanese Patent Application 10-144913 for the purpose of providing a digital subscriber line transmission system that is capable of transmitting an ADSL signal satisfactorily in an environment where there is the above-described crosstalk from an ISDN ping-pong transmission. The sliding-window method is such that in the case of the downstream direction in which an ADSL signal is transmitted from an ADSL unit (ATU-C) on the office side to an ADSL unit (ATU-R) on the subscriber side, the state of the ADSL signal transmitted by the ADSL unit (ATU-C) on the office side in an environment where there is crosstalk from an ISDN ping-pong transmission is decided as set forth below. The method includes dual bitmap and FEXT bitmap methods.

Specifically, if an ADSL symbol (DMT symbol) SB to be transmitted falls entirely within the FEXT interval on the subscriber side, as shown in Fig. 34, the ADSL unit (ATU-C) on the office side transmits this symbol as an inside symbol ISB by a sliding window SLW through a high-density transmission. If a symbol SB to be transmitted falls even partially within the NEXT interval on the subscriber side, the ADSL unit (ATU-C) on the office side transmits this symbol as an outside symbol OSB through a low-density transmission (dual bitmap method). In the upstream direction also, the ADSL unit (ATU-R) on the subscriber side transmits the

ADSL symbols upon dividing them into inside and outside symbols ISB, OSB, respectively, through a method similar to that employed in the downstream direction.

With the dual bitmap method, symbols are
5 transmitted in low density even outside the sliding window SLW in the downstream direction. However, there is also the FEXT bitmap method, in which the ADSL unit (ATU-C) on the office side transmits only a pilot-tone signal PLT, which is a tone-signal for timing
10 synchronization, outside the sliding window SLW. In this case the ADSL unit (ATU-R) on the subscriber side makes no transmission outside the sliding window SLW in the upstream direction.

Fig. 35 is a diagram showing the relationship
15 between transmit/receive in the OCU of the ISDN and the ADSL symbols in the ADSL unit ATU-C on the office side. this Fig. 35 illustrates ADSL symbols in both the dual bitmap and FEXT bitmap cases.

·Bitmap creation

20 To support the dual bitmap method, it is required that two types of bitmaps, namely a bitmap for the inside symbols and a bitmap for the outside symbols, be prepared at the time of training in both the transmit bitmap unit 60 and receive bitmap unit 150 shown in Fig.
25 30. With the FEXT bitmap method, the outside-symbol bitmap of these two types of bitmaps is unnecessary.

The bitmap which shows The bit count assigned to each carrier is decided on the receiving side. That is,

002260" 09472950

5

10

25

5 carrier is input to a selector 260.

An internal clock 230 of the device is frequency-divided to 400 Hz by a frequency divider 240 and the resulting signal is input to a phase discriminator 250. The 400-Hz signal has its phase matched beforehand to that of a 400-Hz signal (ISDN 400-Hz signal) on the office side by 400-Hz information transmitted from the office side via the demodulator 210. Using the 400-Hz signal input thereto, the phase discriminator 250 determines whether a received DMT symbol lies within the FEXT interval, the NEXT interval or outside these intervals and inputs the result to the selector 260. The latter outputs the above-mentioned ERROR signal to a NEXT-interval S/N measurement unit 270 or FEXT-interval S/N measurement unit 280 in accordance with the information that enters from the phase discriminator 250. Each S/N measurement unit integrates ERROR to calculate the S/N ratio and each outputs the S/N ratio to a transmit-bit-count conversion unit 290 carrier by carrier. From the entered carrier-by-carrier S/N ratios, the transmit-bit-count conversion unit 290 calculates the bit count (bitmap) transmitted carrier by carrier and calculates a bitmap b-NEXT for the NEXT interval and a bitmap b-FEXT for the FEXT interval.

·Frame structure

A hyperframe has been introduced for the purpose of providing a digital subscriber line transmission system that is capable of transmitting an ADSL signal

5 satisfactorily in an environment where there is the above-described crosstalk from an ISDN ping-pong transmission. The ISDN ping-pong transmission switches between transmit/receive every half-cycle of the 400-Hz clock whose period is 2.5 ms. On the other hand, one

10 symbol, which is the unit of transmission in ADSL transmission whose institutionalization as a global standard is proceeding, has a duration of about 0.246 ms. Accordingly, since 34 cycles of the ISDN ping-pong transmission, which is the least common multiple of the

15 two types of communication, and the length of time of 345 DMT symbols in ADSL transmission coincide, this interval is defined as a "hyperframe".

As shown in Fig. 38, it is so arranged that one frame becomes one symbol in ADSL. At the time of normal

20 data communication, one superframe is constructed from 68 ADSL frames for data and one synchronization frame (S). There are also cases where an inverse synchronization symbol (I) is used instead of the synchronization symbol (S). The inverse synchronization

25 symbol (I) is a symbol realized by rotating the phase of each carrier of the synchronization symbol (S) by 180°. As shown in Fig. 38, one hyperframe is constructed by collecting together five superframes (= 345 symbols).

004458 092700

Fig. 38 illustrates the case for the downstream direction in which the ADSL unit ATU-C on the office side transmits an ADSL signal to the ADSL unit ATU-R on the subscriber side. In this case it has been decided
5 that the inverse synchronization symbol (I) be situated in the fourth superframe of one hyperframe. In the case of the upstream direction, the inverse synchronization symbol (I) is contained in the first superframe of one hyperframe. Further, one hyperframe is synchronized to
10 34 cycles of the 400-Hz signal in ISDN ping-pong transmission.

Alternative frame structure

In a case where an ISDN ping-pong transmission line is close to an ADSL, the ADSL is affected by both NEXT
15 and FEXT TCM crosstalk from the ISDN ping-pong transmission line, as set forth above. For the purpose of providing a digital subscriber line transmission system that is capable of transmitting an ADSL signal satisfactorily in an environment where there is the
20 above-described crosstalk from an ISDN ping-pong transmission, there is a method available which, unlike that which relies upon the above-mentioned hyperframe, transmits ADSL symbols upon synchronizing them to an ISDN ping-pong transmission.

25 In accordance with ISDN ping-pong transmission, the OCU on the office side transmits the downstream data in the first-half cycles of 400 Hz and receives the upstream data in the second-half cycles of 400 Hz in

004260 89474960

sync with the ISDN 400-Hz signal TTR, as illustrated in Fig. 39. In ADSL transmission also, the ADSL unit on the office side transmits ADSL symbols for the downstream FEXT interval in the first-half cycles of 400 Hz and transmits ADSL symbols for the downstream NEXT interval in the second-half cycles of 400 Hz in sync with the ISDN 400-Hz signal TTR. This is true also with regard to the ADSL unit on the subscriber side. That is, two bitmaps are prepared, namely a bitmap (DMT symbol A) for the NEXT reception interval and a bitmap (DMT symbol B) for the FEXT reception interval. Then, as shown in Fig. 39, the number of transmitted bits is reduced to improve S/N tolerance by transmitting the DMT symbols A in the NEXT interval and the number of transmitted bits is increased to enlarge transmission capacity by transmitting the DMT symbols B in the FEXT interval. By setting the cyclic prefix length to an appropriate length at this time, the number of ADSL symbols for the FEXT interval and the number of ADSL symbols for the NEXT interval are made to coincide. For example, a cyclic prefix of 40 samples which results in 250 μ s per DMT symbol is adopted as opposed to an original cyclic prefix of 32 samples which results in 246 μ s per DMT symbol, whereby one period of TCM crosstalk and the length of time of ten DMT signals are made to agree.

·Introduction of TDD-xDSL

A TDD-xDSL (time-division duplex-xDSL) scheme is

004260" B447/360

10

15

- ISI removal method

The time domain equalizer (TEQ) shown in Fig. 30

operates using the cyclic prefix in the manner described below.

A DMT symbol which enters the parallel-to-serial conversion buffer 40 in Fig. 30 represents a signal state that has no waveform distortion, as illustrated in (a) of Fig. 41. The parallel-to-serial conversion buffer 40 executes processing through which the 32 symbols at the end of this DMT symbol are added onto the beginning of the DMT symbol by copying, as illustrated in (b) of Fig. 41. The portion added on is referred to as the cyclic prefix. The DMT symbol onto which the cyclic prefix has been added is transmitted to the receiving side following subsequent processing on the transmitting side, as shown in (c) of Fig. 41.

A signal that has been received via the metallic line 70, the amplitude and delay characteristics of which are not constant with respect to frequency, becomes distorted owing to the influence of inter-symbol interference (ISI), as illustrated in (d) of Fig. 41.

However, the TEQ 90 has its constants set by training in such a manner that ISI falls within the cyclic prefix of 32 symbols (this is referred to as "TEQ training"). When the TEQ 90 receives the signal indicated at (d) in Fig. 41, therefore, the TEQ 90 executes processing in such a manner that ISI will fall within the cyclic prefix of 32 symbols, as shown in (e) of Fig. 41. Thereafter, the serial-to-parallel buffer 100 removes the cyclic prefix from the TEQ output. As a

result, it is possible to obtain a DMT symbol from which the effects of ISI have been eliminated, as shown in (f) in Fig. 41.

·Influence of ISI on xDSL symbol

5 The influence of ISI on the xDSL symbol will be described with reference to Fig. 42. Illustrated in (a) of Fig. 42 is an ADSL transmit symbol sequence in a case where a continuous signal is transmitted at the time of training. It is assumed here that there is no
10 continuity between the shaded ADSL transmit symbol illustrated in (a) of Fig. 42 and the ADSL transmit signal that precedes it. Illustrated in (b) of Fig. 42(b) is an ADSL receive symbol sequence corresponding to the ADSL transmit symbol sequence in (a) of Fig. 42
15 before TEQ training, and illustrated in (c) of Fig. 42 is an ADSL receive symbol sequence corresponding to the ADSL transmit symbol sequence in (a) of Fig. 42 after TEQ training.

Further, Illustrated in(d) of Fig. 42 is an ADSL
20 transmit symbol sequence onto which a cyclic prefix which prevails at the time of normal data communication has been added, and illustrated in (e) of Fig. 42 is an ADSL receive symbol sequence corresponding to the ADSL transmit symbol sequence in (d) of Fig. 42.

25 (1) Influence after TEQ training

As set forth above, the TEQ acts to remove the effects of ISI from a receive signal by using the cyclic prefix. If the cyclic prefix is added onto each ADSL

002250-092700

transmit training symbol at the time of normal data communication, as shown in (d) of Fig. 42, the TEQ executes processing in such a manner that ISI falls within only the cyclic prefix of 32 symbols, thereby
5 removing the effects of ISI from the receive signal.

However, at the time of training in which a continuous signal based upon the same pattern is transmitted, a cyclic prefix is not added onto any ADSL transmit training symbol, as shown in (a) of Fig. 42.
10 The reason for this is that since a continuous signal is not affected by ISI, so cyclic prefix is unnecessary for the training symbols. On the contrary, if a cyclic prefix were added on, the symbol rate would decline correspondingly and it is therefore better not to add on
15 a cyclic prefix.

However, in a case where a burst symbol sequence is sent as a transmit signal, as in the sliding-window method (FEXT bitmap method) or in the method (TDD-xDSL) of transmitting symbols in sync with ISDN ping-pong
20 transmission, continuity of the transmit signal is lost. As a result, at the time of training in which a continuous signal is transmitted, the ADSL receive symbol at the beginning of the ADSL receive symbol sequence is influenced by waveform distortion
25 corresponding to ISI, as shown in (c) of Fig. 42, even when TEQ training has been completed, and training cannot be carried out using this ADSL receive symbol at this beginning of the sequence.

(2) Influence before TEQ training

Illustrated in (b) of Fig. 42 is an ADSL receive symbol sequence resulting from the ADSL transmit symbol sequence in (a) of Fig. 42 before TEQ training is performed. Here also, however, the ADSL receive symbol is distorted owing to the effects of ISI for the reason set forth above. In (c) of Fig. 42, the influence of waveform distortion corresponding to ISI on the leading ADSL receive symbol falls within 32 symbols owing to the TEQ. In (b) of Fig. 42, on the other hand, this is an ADSL receive symbol sequence before TEQ training is performed and in general, therefore, the influence of ISI on the ADSL receive symbol does not fall within 32 symbols. It is considered that before TEQ training is performed, the influence of waveform distortion acts upon ADSL receive symbols from the second onward as well, as shown in (b) of Fig. 42. Further, there are instances where the ADSL receive symbol at the end of the ADSL receive symbol sequence also is affected by ISI, though this is not illustrated in Fig. 42.

Thus, at the time of training in which a continuous signal based upon the same pattern is transmitted, a cyclic prefix is not added onto each transmit symbol. As a consequence, in TDD-xDSL transmission in which a burst symbol sequence is transmitted as a training signal, the receiving side cannot respond immediately at the rising edge of the burst symbol sequence and waveform distortion occurs at the beginning of the burst

symbol sequence. Accordingly, training is carried out only by the remaining TDD-xDSL receive symbols that have not been influenced by waveform distortion. However, in an instance where four DMT symbols are transmitted in one burst of training, the DMT symbols capable of being used in training are three in number. A problem that arises, therefore, is prolonged training time.

Further, if the transmit training symbol sequence falls within the receive interval (NEXT interval) of an ISDN ping-pong transmission in TDD-xDSL transmission, the transmission is influenced by NEXT from the ISDN line and the TDD-xDSL transmission cannot be performed with a favorable S/N ratio.

Further, in TDD-xDSL transmission, there is no established technique for setting the frequency of a pilot-tone signal used as a timing regeneration signal so as to assure continuity of sample data in contiguous transmit burst signal sequences. A problem that arises is that processing cannot be executed at an accurate timing.

Further, with TDD-xDSL, there is a phase difference between the phase of a training symbol onto which a cyclic prefix for transceiver training has not been added and the phase of a symbol obtained by removing a cyclic prefix from a symbol onto which this cyclic prefix was added at the time of normal data communication. As a consequence, a problem which arises is that the phase of a timing regeneration signal

004260" 29472960

(pilot-tone signal) shifts when a sequence makes a transition from a training symbol onto which a cyclic prefix has not be added to a symbol onto which a cyclic prefix has been added (a training→ normal communication
5 transition).

Furthermore, though it is necessary for the office side to synchronize a TDD-xDSL transmission to an ISDN ping-pong transmission, the same is true on the subscriber side as well. Though the office side can use
10 an 8kHz-network clock to obtain a 400-Hz synchronization signal to which the ISDN ping-pong transmission is synchronized, the subscriber side cannot obtain this 400-Hz synchronization signal. Accordingly, it is important for the subscriber side to have the office
15 side report the transmission phase of the TDD-xDSL accurately so that this information can be obtained. This makes it necessary to provide means for reporting the transmission phase from the office side to the subscriber side efficiently.

20 The foregoing is for a case where crosstalk from an ISDN line to an xDSL is taken into consideration. However, crosstalk is not limited to that from an ISDN line; there is crosstalk also from other xDSLs within the same cable. In particular, since TDD-xDSL
25 transmission is synchronized to the 400-Hz signal TTR of an ISDN ping-pong transmission to perform downstream and upstream transmissions alternately in time-shared fashion, as mentioned above, the xDSL is influenced by

004250" 89472550

crosstalk (NEXT, FEXT), which is similar to that of ISDN ping-pong transmission, from other TDD-xDSLs.

Accordingly, the above-described problem holds not only for crosstalk from an ISDN line but also for crosstalk
5 from other TDD-xDSLs.

SUMMARY OF THE INVENTION

The present invention has been devised based upon new findings and considerations regarding the above-described points and its object is to provide a concrete
10 method concerning the adoption of an effective transmission technique for TDD-xDSL in an environment where noise is received from ISDN ping-pong transmission or other TDD-xDSL transmissions, or a digital subscriber line transmission apparatus having means for
15 implementing this method.

Another object of the present invention is to shorten training time.

Another object of the present invention is to so arrange it that a transmit training symbol sequence
20 after the addition thereto of redundancy data will not fall within the receive interval (NEXT interval) of an ISDN ping-pong transmission or TDD-xDSL transmission, thereby eliminating the effects of NEXT from an ISDN line so that a TDD-xDSL transmission can be performed
25 with an excellent S/N ratio.

A further object of the present invention is to assure continuity of sample data in contiguous transmit burst symbol sequences.

007448 092700

A further object of the present invention is to so arrange it that when there is sequence transition from training to normal data communication, phase shift of a timing regeneration signal (pilot-tone signal) will not
5 occur.

A further object of the present invention is to report timing information, e.g., the phase of an ISDN 400-Hz signal, which specifies the period during which the effects of crosstalk are received from a neighboring
10 line, from the office side to the subscriber side accurately and efficiently.

In a TDD-xDSL transmission method according to the present invention, a DMT symbol sequence is transmitted upon adding some data that is contained within the DMT
15 symbol sequence onto the beginning or end or onto both the beginning and end of the sequence redundantly at the time of training, which is carried out before normal communication, and the redundancy data is then removed on the receiving side. If this expedient is adopted,
20 distortion develops in the redundancy portions but not in the portions of the training symbols. Training can be carried out using all training symbols and training time can be shortened.

Further, the length of the transmit training symbol
25 sequence after the redundancy data is added on is made such that the training symbol sequence will fall within the transmit interval of an ISDN ping-pong transmission or of another TDD-xDSL transmission. For example, the

004260" 8947950

invention, when the subscriber side is notified of transmit timing (the phase of an ISDN 400-Hz signal) of a TDD-xDSL burst signal on the office side, a tone-signal the phase whereof varies one or more times within one transmission burst is transmitted separately of the pilot-tone signal, and this change in the phase of the tone-signal is detected on the receiving side to identify the transmit timing of the TDD-xDSL burst signal. If this expedient is adopted, a correct TDD-xDSL transmission can be performed by detecting the transmit timing (the phase of an ISDN 400-Hz signal) at the time of training of a TDD-xDSL transmission. In this case the phase of the tone-signal can be changed 90° or 180°. If this arrangement is adopted, the transmit timing (the phase of an ISDN 400-Hz signal) can be recognized reliably even if the transmit timing is unknown initially.

Other features and advantages of the present invention will be apparent from the following description taken in conjunction with the accompanying drawings, in which like reference characters designate the same or similar parts throughout the figures thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram useful in describing a transmit symbol sequence at the time of TDD-xDSL training;

Fig. 2 is a diagram illustrating the structure of a transmit frame based upon the TDD-xDSL method (at the

time of training);

Fig. 3 is a diagram illustrating the structure of a transmit frame based upon the TDD-xDSL method (at the time of normal communication);

5 Fig. 4 is a diagram useful in describing frame phase relationship between bursts (in the downstream case);

Fig. 5 is another diagram useful in describing frame phase relationship between bursts (in the
10 downstream case);

Fig. 6 is a diagram showing the phase relationship between burst frames at the time of training and at the time of normal communication;

Figs. 7A and 7B are diagrams useful in describing a
15 method of reporting transmit phase (the phase of an ISDN 400-Hz signal) of a TDD-xDSL at the time of training;

Figs. 8A and 8B are diagrams useful in describing phase-change conveyance patterns;

Fig. 9 is a block diagram illustrating a subscriber
20 transmission system based upon DMT modulation in accordance with the present invention;

Fig. 10 is a block diagram of an arrangement for reconstructing a symbol sequence in accordance with the present invention;

25 Fig. 11 is a time chart indicating an output sequence operation (at the time of training);

Fig. 12 is a time chart indicating an output sequence operation (at the time of normal

004260" 2942960

communication);

Fig. 13 is a block diagram of a sequencer on the transmitting side;

Fig. 14 is a block diagram of an arrangement for
5 inputting an ISDN 400-Hz signal TTR externally;

Fig. 15 is a block diagram of various components on the receiving side;

Fig. 16 is a time chart indicating a receive sequence operation (at the time of training);

10 Fig. 17 is a time chart indicating a receive sequence operation (at the time of normal communication);

Fig. 18 is a diagram showing the phase relationship between burst frames at the time of training and at the
15 time of normal communication according to a first embodiment of the present invention;

Fig. 19 is a diagram illustrating the structure of a burst frame (at the time of normal communication) according to the first embodiment;

20 Fig. 20 is a diagram illustrating the structure of a burst frame (at the time of training) according to the first embodiment;

Fig. 21 is a diagram useful in describing a first worst condition (at the time of training) according to
25 the first embodiment;

Fig. 22 is a diagram useful in describing a second worst condition (at the time of training) according to the first embodiment;

004260" 8947/550

Fig. 23 is a diagram useful in describing a third worst condition (at the time of training) according to the first embodiment;

5 Figs. 24A and 24B are diagrams useful in describing two worst conditions;

Fig. 25 is a diagram useful in describing the phase difference between a transmit symbol sequence for training and a transmit symbol sequence at the time of normal communication;

10 Fig. 26 is a diagram useful in describing the phase relationship between burst frames at the time of training and at the time of normal communication according to a second embodiment of the present invention;

15 Fig. 27 is a diagram illustrating the structure of a burst frame (at the time of normal communication) according to the second embodiment;

Fig. 28 is a diagram illustrating the structure of a burst frame (at the time of training) according to the 20 second embodiment;

Fig. 29 is a diagram useful in describing a DMT transmission spectrum;

Fig. 30 is a functional diagram of a subscriber transmission system which relies upon DMT modulation;

25 Fig. 31 is a diagram useful in describing the band of ISDN ping-pong transmission and the band of ADSL transmission;

Fig. 32 is a diagram useful in describing crosstalk

00446-0920

noise;

Figs. 33A and 33B are diagrams useful in describing interference (crosstalk) from an ISDN line on an ADSL;

Fig. 34 is a diagram useful in describing a sliding
5 window;

Fig. 35 is a diagram useful in describing a dual bitmap and a FEXT bitmap;

Fig. 36 is a diagram useful in describing the creation of a bitmap based upon a B & G protocol;

Fig. 37 is a block diagram useful in describing
10 measurement of S/N ratio in every NEXT/FEXT interval;

Fig. 38 is a diagram useful in describing a hyperframe scheme;

Fig. 39 is a diagram useful in describing a
15 transmission method in which ADSLs symbol are synchronized to an ISDN ping-pong transmission;

Fig. 40 is a diagram useful in describing a method of transmitting TDD-xDSL symbols;

Fig. 41 is diagram useful in describing a method of
20 removing ISI; and

Fig. 42 is diagram useful in describing the effects of ISI on xDSL symbols.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

(A) Overview of the present invention;

25 The present invention has a number of characterizing features, which are set forth below, when applied in TDD-xDSL transmission in an environment in which the TDD-xDSL transmission is influenced by

007460.092700

periodic noise from an ISDN ping-pong transmission line or from a transmission through another TDD-xDSL. The description rendered below relates to TDD-xDSL transmission in an environment in which this transmission is influenced by periodic noise from an ISDN ping-pong transmission line.

(a) First characterizing feature

A first characterizing feature is the transmission of a training symbol sequence 500 of the kind shown in Fig. 1 in the training of an ADSL unit (transceiver) of a TDD-xDSL. A conventional transmit symbol sequence 502 is constructed by connecting training symbols 501 each of which is devoid of a cyclic prefix. In the training of a TDD-xDSL transceiver, (1) a pattern 503, which is identical with the end portion of the leading training symbol 501, is added onto the beginning of the conventional transmit symbol sequence 502 as a redundancy signal and is composed of a predetermined number of samples, thereby making it possible to form a pattern of continuous training symbols that includes the portion added on. The length of the portion added on is a predetermined sample count n_1 that is larger than a cyclic prefix. (2) Or, in another option, a pattern 504 identical with the leading-end portion of the final training symbol 501 is added onto the end of the transmit symbol sequence 502 as a redundancy signal and is composed of a sample count n_2 determined separately of the sample count n_1 attached to the beginning in

option (1) above. (3) Or, in yet another option, the redundancy signals 503, 504 are added on to both the beginning and end, respectively, of the transmit symbol sequence 502.

5 With TDD-xDSL, each symbol at the time of training has the same pattern. If an IFFT is used as an intermediary, therefore, a signal continuous between symbols can be transmitted. Accordingly, by adding the end portion of a leading training symbol onto the
10 beginning of a final transmit symbol sequence, or by adding the leading-end portion of a training symbol onto the end of the transmit symbol sequence, or by adding both of these onto the respective ends of the transmit symbol sequence, a continuous signal that includes the
15 added on portion can be formed. If a redundancy signal is thus added onto the beginning or end of a transmit symbol sequence, only the redundancy signal portions (503, 504) are affected by distortion caused by ISI; the transmit symbol sequence other than the redundancy
20 signal portions (503, 504) develops no distortion. All of these symbols, therefore, can be used as training symbols. This makes it possible to shorten training time. It should be noted that transmission time is not prolonged even though the redundancy signals are added
25 on. The reason is that the redundancy signals can be transmitted utilizing those periods in the transmit intervals of the TDD-xDSL in which signals are not transmitted.

002250" 8347/2550

(b) Second characterizing feature

A second characterizing feature is that the transmit timing and length of the training symbol sequence are set in such a manner that the training
5 symbol sequence after the redundancy sample sequence has been added on according to the first characterizing feature will not fall within the receive interval (NEXT) of an ISDN ping-pong transmission.

More specifically, the transmit timing of a TDD-
10 xDSL transmission and the length of a transmit training symbol sequence are set in such a manner that the transmit training symbol sequence of a TDD-xDSL will fall within the transmit frame interval of an ISDN ping-pong transmission or within an interval obtained by
15 combining the transmit frame interval of an ISDN ping-pong transmission and a guard-time interval between transmission and reception in an ISDN ping-pong transmission.

Reference will be had to Fig. 2 to describe the
20 requirements for fitting the TDD-xDSL transmit training symbol sequence 500 into a transmit interval 601 of an ISDN ping-pong transmission. Let $D (= 3.125 \mu s \times 377 = 1.178125 \text{ ms})$ represent the length of time of an ISDN ping-pong transmission interval; $a (= 18.75 \sim 23.4375$
25 $\mu s)$ the length of the the transmit/receive guard time of the ISDN ping-pong transmission; $S1$ the length of the transmission time of the training symbol sequence 502 before TDD-xDSL redundancy data is added on; $x1$ and $y1$

00674453.092700
007260" 89472960

the lengths of the transmission times of the redundancy signals 503, 504 added onto the beginning and end, respectively, of the DMT symbol sequence for training; and α_1 , β_1 the margins between the interval of the transmit training symbol sequence 500 and the transmit interval 601 of the ISDN ping-pong transmission. A relation that is to be satisfied by the present invention is as follows:

$$S_1 + \alpha_1 + \beta_1 + x_1 + y_1 \leq D + a \quad (1)$$

(where $0 \leq \alpha_1$, $0 \leq \beta_1$)

or

$$S_1 + \alpha_1 + \beta_1 + x_1 + y_1 \leq D \quad (2)$$

(where $0 \leq \alpha_1$, $0 \leq \beta_1$)

Further, let m represent the number of samples within a DMT symbol that is devoid of a cyclic prefix; N the number of DMT symbols devoid of a cyclic prefix included in the training symbol sequence 500; and f_d the frequency spacing of the DMT carriers. Accordingly, S_1 , x_1 and y_1 can be expressed by the following equations:

$$S_1 = N \times m \times [1/(m \times f_d)] = N/f_d \quad (3a)$$

$$x_1 = n_x \times [1/(m \times f_d)] \quad (3b)$$

$$y_1 = n_y \times [1/(m \times f_d)] \quad (3c)$$

where $m = 2n$ (n is a natural number) and n_x , n_y are arbitrary positive integers which signify the sample counts of x_1 , y_1 and $(n_x + n_y) > (m/8)$ holds.

Similarly, at the time of normal communication, as depicted in Fig. 3, it is possible to obtain relations for fitting a TDD-xDSL DMT transmit symbol sequence 700 into

the transmit interval 601 of the ISDN ping-pong transmission in a manner similar to that at the time of training. Specifically, in a manner similar to that at the time of training, let D represent the length of time of the ISDN ping-pong transmission interval; a the length of the transmit/receive guard time of the ISDN ping-pong transmission; S2 the length of the TDD-xDSL DMT transmit symbol sequence 700; α_2 , β_2 the margins between the interval of the TDD-xDSL DMT transmit symbol sequence 700 and the transmit interval 601 of the ISDN ping-pong transmission; m the number of carriers of the DMT transmit symbols; N the number of symbols contained in the symbol sequence at the time of normal communication; and fd the frequency spacing of the DMT carriers. A relation that is to be satisfied by the present invention is as follows:

$$S2 + \alpha_2 + \beta_2 \leq D + a \quad (4)$$

or

$$S2 + \alpha_2 + \beta_2 \leq D \quad (4)'$$

$$S2 = N \times (m + nc) \times [1/(m \times fd)] \quad (5)$$

where $0 \leq \alpha_1$, $0 \leq \beta_1$ hold and nc is the number of samples of a cyclic prefix at the time of normal communication.

In accordance with Equations (4) - (5), a cyclic prefix length fixed at 16 samples conventionally in accordance with G.992.2 (G.lite) also can be varied over a range that satisfies Equation (4).

If the arrangement described above is adopted, the transmit timing of the TDD-xDSL training symbol sequence

004260" 89472950

will fall within the transmit interval (FEXT interval) of the ISDN ping-pong transmission and leakage of NEXT noise from the ISDN line can be avoided when TDD-xDSL training symbols are received. Further, at the time of normal communication, the transmit timing of the TDD-xDSL transmit symbol sequence will fall within the transmit interval (FEXT interval) of the ISDN ping-pong transmission and leakage of NEXT noise from the ISDN line can be avoided when TDD-xDSL transmit symbols are received.

(c) Third characterizing feature

A third characterizing feature resides in selecting the frequency of a timing regeneration signal (pilot-tone signal) in such a manner that the continuity of DMT symbols is maintained between transmit burst intervals in a TDD-xDSL.

Fig. 4 is a diagram useful in describing frame phase between transmit bursts at the time of training of a TDD-xDSL. In DMT modulation, it is desired that each symbol be a continuous DMT sample sequence. In other words, in an interval T_a in Fig. 4 in which signal transmission between transmit bursts is not carried out, it is required that the length of this interval be a whole-number multiple of the pilot-tone cycle. Accordingly, the cycle of the pilot tone is selected in such a manner that (1) the length of the transmit symbol sequence indicated by T_b in Fig. 4 will be a whole-number multiple of the pilot-tone cycle and (2) a burst

5 the continuity of DMT samples in contiguous transmit
bursts can be maintained.

communication. Fig. 5 relates to frames in the downstream direction. As set forth above (in the description of the second characterizing feature), it is required that the transmit symbols 500, 700 at the time of training and at the time of normal communication fall within the transmit interval 601 of the TCM-ISDN. To achieve this, symbol transmission is carried out using the transmit interval 601 of the TCM-ISDN as the reference timing, and the burst intervals T_c , T_d at the time of training and at the time of normal communication are decided from the burst interval of the ISDN ping-pong transmission. According to the present invention, the burst intervals T_c , T_d are selected to be whole-number multiples of the cycle of a pilot-tone signal PLT, which is for setting the timing a TDD-xDSL.

25 (d) Fourth characterizing feature

A fourth characterizing feature resides in adopting an arrangement in which a phase difference θ_d (see Fig. 6) between the phase of the symbol 501 contained in the

transmit symbol sequence 500 at the time of training
using training symbols devoid of a cyclic prefix (CP)
and the phase of a symbol 701 contained in the transmit
symbol sequence 700 at the time of normal communication
5 using DMT symbols having a cyclic prefix (CP) will be a
whole-number multiple of a pilot-tone cycle selected
earlier.

Fig. 6 is a diagram useful in describing the phase
relationship between transmit burst frames at the time
10 of training and at the time of normal communication.
Fig. 6 relates to the phase difference θ_d between the
starting points of the symbols 501, 701 situated at the
beginning of the transmit symbol sequence 500 for
training and the transmit symbol sequence 700 for normal
15 communication, respectively.

The transmit symbol sequence 500 for training and
the transmit symbol sequence 700 for normal
communication are transmitted independently of each
other in sync with the burst cycle of the ISDN ping-pong
20 transmission. Further, the manners in which the symbols
devoid of cyclic prefixes are arrayed in the respective
transmit symbol sequences also differ from each other.
For this reason, the phases of the individual symbols
501, 701 contained in the transmit symbol sequences at
25 the time of training and at the time of normal
communication differ. It is so arranged that this phase
difference θ_d will be a whole-number multiple of the
cycle of the pilot-tone signal PLT. If this expedient

002250 8947960

is adopted, it will be possible to execute both training processing and processing for normal data communication in sync with the pilot-tone signal.

Methods of arranging it so that the phase
5 difference will become a whole-number multiple of the cycle of the pilot-tone signal PLT include a method of adjusting the cycle of the pilot-tone signal PLT and a method of shifting the transmit timing of the transmit symbol sequence 700 for normal communication relative to
10 the transmit symbol sequence 500 for training.

(e) Fifth characterizing feature

A fifth characterizing feature resides in transmitting a tone signal separately of the pilot-tone signal PLT which is for timing regeneration, at the time
15 of training, whereby the office side notifies the subscriber side of the phase of the ISDN 400-Hz signal (i.e., reports the transmission phase of the TDD-xDSL on the office side). In other words, the office side notifies the subscriber side of the timing which
20 specifies the period during which the affects of crosstalk are received.

The tone signal added on in addition to the pilot-tone signal PLT always includes one or more phase-change points within one burst. The xDSL unit on the
25 subscriber side, therefore, finds the phase-change point and adopts a time which is a set time before or a set time after the phase-change point as the TDD-xDSL transmit timing of the xDSL unit on the office side or

007250 294772550

as the rising edge of the 400-Hz signal. By virtue of the fifth characterizing feature, timing can be regenerated more easily and in a shorter period of time than with the conventional method.

5 Figs. 7A and 7B are diagrams useful in describing regeneration of the timing of the ISDN 400-Hz signal by a tone added on anew. In a case where the transmit symbol sequence of one burst contains four training symbols, Fig. 7A shows an example in which phase changes
10 one time within one burst and Fig. 7B an example in which phase changes twice within one burst.

 In Fig. 7A, the phase of training symbols changes from pattern A to pattern B between second and third symbols. In Fig. 7B, the phase of training symbols
15 changes from pattern B to pattern A between first and second symbols and from pattern A to pattern B between third and fourth symbols. It is also permissible to adopt an arrangement in which there is a shift from pattern A to a new pattern C between the third and
20 fourth symbols.

 In the example of Fig. 7A, a time which is a set time period T_1 prior to phase-change detection time is the timing of the rising edge of the ISDN 400-Hz signal TTR. In the example of Fig. 7B, a time which is a set
25 time period T_2 prior to the average time of two phase-change detection times T_{21} , T_{22} is the timing of the rising edge of the ISDN 400-Hz signal TTR.

(f) Sixth characterizing feature

007446 102700
007260 2947360

5

10

(a) Overall construction

20

25

The sequencer 310 on the transmitting side (1) generates a training-state signal TRN and a communication-state signal DMN upon distinguishing between training time and normal communication time, and
5 (2) controls the parallel-to-serial conversion buffer 40 and outputs the transmit symbol sequence 500 for training (see Fig. 1) and the transmit symbol sequence 700 for normal communication (see Fig. 3).

The training-signal generating circuit 330 (1)
10 outputs various training signals at the time of training and (2) outputs the timing-regeneration pilot-tone signal PLT in the transmit interval of the TDD-xDSL regardless of whether it is training time or normal communication time. The pilot-tone signal PLT is
15 transmitted to the receiving side by carrier #64. The training-signal generating circuit 330 transmits another tone-signal separately of the pilot-tone signal PLT by carrier #48 at training time to report the phase of the ISDN 400-Hz signal (the transmit phase of the TDD-xDSL
20 on the office side) from the office side to the subscriber side (see Figs. 7, 8).

In the transmit interval of the TDD-xDSL, the selector 320 (1) selects the training signal output from the training-signal generating circuit 330 and inputs
25 this signal to the IFFT circuit 30 at training time, and (2) selects the transmit data output from the encoder 20 to the IFFT circuit 30 at the time of normal communication.

007453-092700

002260" 894T 2950

The signal detecting circuit 340 monitors the level of the output signal from the A/D converter 80 to detect when the training signal has been sent from the transmitting side, and the sequencer 350 controls the serial-to-parallel conversion buffer 100 to exercise control in such a manner that the one symbol of data from which the redundancy signal / cyclic prefix has been removed at training time / normal communication time, respectively, is input to the FFT circuit 110. On the basis of the signal output from the #64 output terminal of the FFT circuit, the pilot-phase detecting circuit 360 detects the phase of the pilot-tone signal PLT and controls the A/D conversion timing of the A/D converter 80.

The training signal processor 370 analyzes the training signal to detect the ISDN 400-Hz signal and detects the start of normal communication based upon sequence switching data sent from the transmitting side.

(b) Arrangement for generating transmit symbol sequence at training time and normal communication time

Fig. 10 is a block diagram of an arrangement for generating a symbol sequence at training time and normal communication time. Components in Fig. 10 identical with those shown in Fig. 9 are designated by like reference characters. Fig. 11 is a time chart for describing an output sequence operation at training time. This is for a case where a redundancy signal 503

having a length of 128 samples is added onto the beginning of the sequence and a redundancy signal 504 having a length of 8 samples is added onto the end of the sequence. Fig. 12 is a time chart for describing an output sequence operation at the time of normal communication. This is for a case where the cyclic prefix has a length of 16 samples.

(b-1) Creation of training symbol sequence

The sequencer 310 generates various control signals in such a manner that the transmit symbol sequence 500 for training will fall within the transmit interval of the ISDN ping-pong transmission. More specifically, at start-up, the sequencer 310 controls switching between training time and normal transmission time by timer control, inputs a training / normal communication switching signal DTSL to the selector 320 and inputs the training-state signal TRN to the training-signal generating circuit 330. In response to the training / normal communication switching signal DTSL, the selector 320 selects a training signal, which is output from the training-signal generating circuit 330, and inputs this signal to the IFFT circuit 30 at the time of training, and selects the transmit data output from the encoder 20 and inputs this data to the IFFT circuit 30 at the time of normal communication. The training-signal generating circuit 330 generates a predetermined training signal at training time.

At training time, the sequencer 310 generates (1) a

002250" 89472950

P/S load timing signal PSLD, (2) a P/S output mask
signal PSMK and (3) a P/S output select signal PSSL (= "11") upon elapse of a predetermined time t1 from the
rising edge of the ISDN 400-Hz signal TTR, as shown in
5 Fig. 11.

The P/S load timing signal PSLD is a signal which
loads the result of the IFFT operation (256 items of
signal-point data) into a buffering unit 40a in the
parallel-to-serial conversion buffer 40. The P/S output
10 mask signal PSMK allows a data output from the buffering
unit 40a when at the high level and inhibits a data
output from the buffering unit 40a when at the low
level. The P/S output select signal PSSL designates
successive read-out of signals starting from the 0th
15 signal, the 128th signal or the 240th signal among the 256
signals that have been stored in the buffering unit 40a.
More specifically, the P/S output select signal PSSL
takes on the values "10", "11", "01" and the selector
40b reads out signals in numerical order starting from
20 (1) the 0th signal of buffering unit 40a if the signal
PSSL is "10", (2) the 128th signal of buffering unit 40a
if the signal PSSL is "11" and (3) the 240th signal of
buffering unit 40a if the signal PSSL is "01".

If the P/S load timing signal PSLD is generated,
25 256 signals output from the IFFT circuit 30 are stored
in the buffering unit 40a of the parallel-to-serial
conversion buffer 40. Next, in response to the P/S
output select signal PSSL of logic "11", the selector

002260" 88472350

40b reads signals out of the buffering unit 40a in numerical order starting from the 128th signal in sync with a P/S operating clock PSCL and outputs these signals via a mask circuit 40c. As a result, 128
5 signals from the 128th to the 255th are read out as the redundancy signal 503 and then 256 training signals (1st symbol data) from the 0th to the 255th are read out.

If read-out of the initial training symbol is completed, the sequencer 310 generates the P/S load
10 timing signal PSLD again and generates the P/S output select signal PSSSL of logic "10". As a result, the next 256 signals output from the IFFT circuit 30 are stored in the buffering unit 40a of the parallel-to-serial conversion buffer 40. Next, in response to the P/S
15 output select signal PSSSL of logic "10", the selector 40b reads signals out of the buffering unit 40a in numerical order starting from the 0th signal in sync with a P/S operating clock PSCL and outputs these signals via a mask circuit 40c. As a result, 256 training signals
20 (2nd symbol data) from the 0th to the 255th are read out.

If read-out of the 2nd training symbol is completed, the sequencer 310 generates the P/S load timing signal PSLD and the next 256 signals output from the IFFT
25 parallel-to-serial conversion buffer 40. The selector 40b reads signals out of the buffering unit 40a in numerical order starting from the 0th signal in sync with the P/S operating clock PSCL and outputs these signals.

002260" 294T/2360

As a result, 256 training signals (3^{rd} symbol data) from the 0^{th} to the 255^{th} are read out.

If read-out of the 3^{rd} training symbol is completed, the sequencer 310 generates the P/S load timing signal
5 PSLD and the next 256 signals output from the IFFT circuit 30 are stored in the buffering unit 40a of the parallel-to-serial conversion buffer 40. The selector 40b reads signals out of the buffering unit 40a in numerical order starting from the 0^{th} signal in sync with
10 the P/S operating clock PSCL and outputs these signals. As a result, 256 training signals (the final symbol data) from the 0^{th} to the 255^{th} are read out. Thereafter, eight signals from the 0^{th} to the 7^{th} are read out and output as the redundancy signal 504.

15 If output of the redundancy signal 504 is completed, the sequencer 310 places the P/S output mask signal PSMK at the low level and places the P/S output select signal at logic "00" to establish the non-selected state.

20 Thereafter, at training time, the above-described operation is repeated whenever the ISDN 400-Hz signal TTR rises to create and transmit the transmit symbol sequence for training.

(b-2) Creation of transmit symbol sequence
25 at time of normal communication

The sequencer 310 generates various control signals in such a manner that the transmit symbol sequence 700 for normal communication will be transmitted within the

0967468 "092700

More specifically, at start-up, the sequencer 310 exercises control to switch from the training state to the normal communication state at elapse of a

5 predetermined period time following start-up. As a
result, the selector 320 selects and inputs the transmit
data from the encoder 20 to the IFFT circuit 30. In
addition, the selector 320 selects the pilot-tone signal
PLT from the training-signal generating circuit 330 and
10 inputs this signal to the #64 terminal of the IFFT
circuit 30.

Further, at the time of normal communication, the sequencer 310 generates (1) the P/S load timing signal PSLD, (2) the P/S output mask signal PSMK and (3) the P/S output select signal PSSL (= "01") upon elapse of a predetermined time t2 from the rising edge of the ISDN 400-Hz signal TTR.

If the P/S load timing signal PSLD is generated, 256 signals output from the IFFT circuit 30 are stored in the buffering unit 40a of the parallel-to-serial conversion buffer 40. Next, in response to the P/S output select signal PSSL of logic "01", the selector 40b reads signals out of the buffering unit 40a in numerical order starting from the 240th signal in sync with a P/S operating clock PSCL and outputs these signals via a mask circuit 40c. As a result, 16 signals from the 240^h to the 255th are read out as the cyclic prefix and then 256 transmit signals (1st symbol data)

from the 0th to the 255th are read out.

If read-out of the initial transmit symbol is completed, the sequencer 310 generates the P/S load timing signal PSLD again. As a result, the next 256
5 signals output from the IFFT circuit 30 are stored in the buffering unit 40a of the parallel-to-serial conversion buffer 40. Next, in response to the P/S output select signal PSSL of logic "01", the selector 40b reads 16 signals from the 240th to the 255th out of
10 the buffering unit 40a as the cyclic prefix in sync with the P/S operating clock PSCL and then reads out 256 transmit signals (2nd symbol data) from the 0th to the 255th and outputs these signals. If 3rd and 4th symbol data with attached cyclic prefixes are subsequently read
15 out and output in similar fashion, the sequencer 310 places the P/S output mask signal PSMK at the low level and places the P/S output select signal PSSL at logic "00" to establish the non-selected state.

Thereafter, at normal communication time, the
20 above-described operation is repeated by the sequencer 310 whenever the ISDN 400-Hz signal TTR rises to create and transmit the transmit symbol sequence for normal communication.

Fig. 13 is a block diagram of a sequencer in the
25 ADSL unit on the office side. A sequence switching unit 311 generates the training-state signal TRN and a normal-communication-state signal CMN by timer control at start-up, and a signal generator 312 for generating

002260" 2247/950

the ISDN 400-Hz signal outputs the 400-Hz signal TTR of the ISDN ping-pong transmission. Further, a P/S operating clock generator 313 generates the P/S operating clock PSCL in sync with the ISDN 400-Hz signal TTR, and a pilot-tone signal generator 314 applies 1/4 frequency division to the P/S operating clock PSCL and outputs the pilot-tone signal PLT for timing regeneration. Though this illustrates an example in which the ISDN 400-Hz signal TTR is output from the signal generator 312, this signal may be input externally. Such an arrangement will be described later.

The reason for outputting the pilot-tone signal PLT by 1/4 frequency division of the P/S operating clock PSCL is as follows: If carrier frequency spacing is 4 kHz, the number of samples within one DMT symbol is 256 and #64 is used as the pilot-tone transmission carrier, the FFT sampling frequency on the receiving side will be 1024 kHz ($= 4 \times 256$ kHz) based upon the carrier frequency spacing and number of carriers. Further, the frequency of the pilot tone will be $4 \text{ kHz} \times 64 = 256$ kHz. In other words, the data per cycle of the pilot tone is four sample's worth. On the other hand, the P/S operating clock PSCL is transmitted serially from the parallel-to-serial conversion buffer 40 at 1024 kHz. This is equal to the FFT sampling frequency. Accordingly, the pilot-tone signal PLT can be generated by subjecting the P/S operating clock PSCL to 1/4

09671458 "092700

frequency division. The pilot-tone signal PLT has a phase and frequency that agree with those of the pilot-tone signal generated by the training-signal generating circuit 330.

5 At training time, a first timing generator 315 for generating a first transmit symbol output timing generates a symbol output timing signal TSOT in sync with the pilot-tone signal PLT upon elapse of the predetermined time t_1 (see Fig. 11) from the rising edge
10 of the ISDN 400-Hz signal TTR.

 At normal communication time, a second timing generator 316 for generating a transmit symbol output timing generates a transmit symbol output timing signal DSOT in sync with the pilot-tone signal PLT upon elapse
15 of the predetermined time t_2 (see Fig. 12) from the rising edge of the ISDN 400-Hz signal TTR.

 On the basis of the training-state signal TRN, normal-communication-state signal CMN and transmit symbol output timing signals TSOT, DSOT, a signal
20 generator 317 generates various control signals (the P/S load timing signal PSLD, P/S output select signal PSSL, P/S output mask signal PSMK, training / normal communication switching signal DTSL, etc.) in sync with the P/S operating clock PSCL and outputs these signals.

25 By virtue of the fact that the timing generators 315, 316 generate the transmit symbol output timing signals TSOT, DSOT in sync with the pilot-tone signal PLT, the phase difference θ_d (see Fig. 6) between the

09071458 092700

individual symbols 501, 701 contained in the transmit symbol sequence can be adjusted to a whole-number multiple of the cycle of the pilot tone at training time and at normal communication time.

5 Further, by virtue of the fact that the timing generators 315, 316 generate the transmit symbol output timing signals TSOT, DSOT in sync with the pilot-tone signal PLT, (1) the length of the transmit symbol sequence can be made a whole-number multiple of the
10 cycle of the pilot tone and (2) the transmit burst interval can be made a whole-number multiple of the cycle of the pilot tone at training time and normal communication time, respectively. As a result, in TDD-xDSL transmission, an interval in which no signal is
15 transmitted can be made a whole-number multiple of the pilot-tone cycle in the interval between temporally contiguous transmit bursts, and the continuity of DMT samples in contiguous transmit bursts can be maintained. Since the number of samples in the transmit symbol
20 sequence at training time is 1160 ($= 128 + 256 \times 4 + 8$), this is 290 times the pilot-tone cycle, and since the number of samples in the transmit symbol sequence at normal communication time is 1088 [$= (16 + 256) \times 4$], this is 272 times the pilot-tone cycle. Equation (1),
25 therefore, is satisfied.

·Alternative arrangement for generating the ISDN 400-Hz signal TTR

Fig. 14 illustrates an embodiment in which the ISDN

09671468-092700

400-Hz signal TTR. A plurality of office-side TDD-xDSL units 301₁ ~ 301₄ disposed within the central office in Fig. 14 are connected to a signal generator 401 which generates the ISDN 400-Hz signal. Though each of the office-side TDD-xDSL units 301₁ ~ 301₄ has functional blocks of the kind shown in Fig. 9, only the sequencer 310 is shown in Fig. 14. Further, the sequencer 310 has the construction shown in Fig. 13. In this embodiment the ISDN 400-Hz signal TTR is input externally and therefore a signal acquisition unit 312a which acquires the ISDN 400-Hz signal is provided instead of the unit 312 (Fig. 13) that generates the ISDN 400-Hz signal. Furthermore, blocks other than that of the unit 312 that generates the ISDN 400-Hz signal shown in Fig. 13 are illustrated collectively as a processing unit 312b within the sequencer.

The signal generator 401 which generates the ISDN 400-Hz signal is disposed in all telephone offices that are capable of providing ISDN service and generates the ISDN 400-Hz signal TTR using an 8-kHz network clock. The office-side TDD-xDSL units 301₁ ~ 301₄ are connected to the signal generator 401 and the unit 312a acquires the ISDN 400-Hz signal from the signal generator 401. The signal acquisition unit 312a supplies the acquired ISDN 400-Hz signal TTR to each of the components within the internal processing unit 312b in a manner similar to the method illustrated in Fig. 13. In this fashion all of the office-side TDD-xDSL units 301₁ ~ 301₄ and the

ISDN-OCU (not shown) are capable of communicating in sync with the ISDN 400-Hz signal TTR.

It is possible that a telephone office that does not supply ISDN service will not be provided with the signal generator 401 for generating the ISDN 400-Hz signal. In such case a unit which generates a 400-Hz signal in the same manner as the signal generator 401 is deployed at the central office and supplies the 400-Hz signal to each of the office-side TDD-xDSL units 301₁ ~ 301₄ in the manner shown in Fig. 14. Such an arrangement makes it possible to prevent crosstalk noise from an adjacent TDD-xDSL.

(c) Components on receiving side

Fig. 15 is a block diagram of the principal components on the receiving side. Components in Fig. 15 identical with those shown in Fig. 9 are designated by like reference characters. The signal detecting circuit 340 monitors the level of the output signal from the A/D converter 80, which subjects the input signal to an analog-to-digital conversion at the FFT sampling frequency, to thereby detect when the training signal has been sent from the transmitting side, and inputs a training-starting signal TRST to the sequencer 350. The training signal processor 370 analyzes the training signal and executes various training processing. For example, the training signal processor 370 detects the timing of the ISDN 400-Hz signal TTR and, on the basis of sequence switching data sent from the transmitting

side, detects the start timing of normal communication and inputs a normal-communication start signal CMST to the sequencer 350. The latter has an S/P operating clock generator 350a and a control signal generator 350b. The S/P operating clock generator 350a generates a S/P operating clock SPCL, the frequency of which is the same as the FFT sampling frequency, in sync with the ISDN 400-Hz signal TTR. At training time following detection of the timing of the ISDN 400-Hz signal TTR and completion of phase control of the pilot-tone signal, the control signal generator 350b generates various timing signals shown in Fig. 16 in sync with the S/P operating clock SPCL. At normal communication time following detection of the timing of the ISDN 400-Hz signal TTR and completion of phase control of the pilot-tone signal, the control signal generator 350b generates various timing signals shown in Fig. 17 in sync with the S/P operating clock SPCL.

(c-1) Receive sequence operation at training time
(see Fig. 16)

If the signal detecting circuit 340 generates the training-starting signal TRST, the sequencer 350 generates an S/P load timing signal SPLD after the 128-sample redundancy signal arrives. As a result, the redundancy signal 503 that was added onto the beginning of the transmit symbol sequence 500 can be removed. If the S/P load timing signal SPLD is generated, the serial-to-parallel conversion buffer 100 (Fig. 9)

004260" 8947/960

successively stores the sample data output by the TEQ 90
in sync with the S/P operating clock SPCL. After one
symbol (= 256 samples) is preserved, the sequencer 350
generates an FFT load timing signal FFTLD to load the
5 one symbol's worth of sample data from the serial-to-
parallel buffer 100 to the FFT circuit 110. The latter
performs an FFT operation at a predetermined timing and
outputs the results of the operation.

Meanwhile, the serial-to-parallel conversion buffer
10 100 continues to successively store the sample data
output from the TEQ 90 even after the FFT load timing
signal FFTLD is generated and inputs the one symbol's
worth (= 256 samples) of data to the FFT circuit 110 by
the FFT load timing signal FFTLD generated from the
15 sequencer 350 after the one symbol's worth of data is
preserved.

The same receive sequence operation is thenceforth
repeated. After the final symbol is input to the FFT
circuit 110, the sequencer 350 places the S/P load
20 timing signal SPLD at the low level and removes the
redundancy signal 504 that was added onto the end of the
transmit symbol sequence.

(c-2) Receive sequence operation at normal
communication time (see Fig. 17)

25 If the normal-communication start signal CMST
enters from the training signal processor 370, the
sequencer 350 immediately generates the S/P load timing
signal SPLD. If the S/P load timing signal SPLD is

09574453-092700
00/2260-8947/860

Meanwhile, the serial-to-parallel conversion buffer 100 continues to successively store the sample data output from the TEQ 90 even after the FFT load timing signal FFTLD is generated and the sequencer 350 generates the FFT load timing signal FFTLD at the timing at which the 272 ($= 16 + 256$) items of new sample data were stored in the serial-to-parallel conversion buffer 100. As a result, the serial-to-parallel buffer 100 loads one symbol's worth of sample data minus the 16-sample cyclic prefix in the FFT circuit 110. The FFT circuit 110 performs an FFT operation at a predetermined timing and outputs the results of the operation.

The same processing is thenceforth repeated. After the final symbol is input to the FFT circuit 110, the sequencer 350 places the S/P load timing signal SPLD at

the low level.

(d) Control of transmission of pilot-tone signal

PLT

09671458.092700
A pilot generator 330a (Fig. 10) in the training-
5 signal generating circuit 330 generates the pilot-tone
signal. The training-signal generating circuit 330
sends the pilot-tone signal to the subscriber side in
the transmit interval of the TDD-xDSL transmission
regardless of whether it is training time or normal
10 communication time. More specifically, the sequencer
310 generates the select signal DTSL and the selector
320 inputs the pilot-tone signal to the #64 terminal of
the IFFT circuit 30 in the transmit interval of the TDD-
xDSL transmission. The IFFT circuit 30 applies IFFT
15 processing to the pilot-tone signal and then transmits
the processed signal to the receiving side via the
parallel-to-serial conversion buffer 40 and D/A
converter 50.

On the basis of the signal output from the #64
20 carrier terminal of the FFT circuit 110, the pilot-
phase detecting circuit 360 detects the phase of the
pilot-tone signal PLT and controls the A/D conversion
timing of the A/D converter 80. As a result, the A/D
conversion and other processing can be executed on the
25 receiving side in sync with the pilot-tone signal.

(e) Sending/receiving of phase of ISDN 400-Hz
signal

At the time of training, the training-signal

generating circuit 330 transmits a tone signal separately of the pilot-tone signal PLT by carrier #48 to thereby report the phase of the ISDN 400-Hz signal (the transmit phase of the TDD-xDSL on the office side)

5 from the office side to the subscriber side (see Figs. 7 and 8). In other words, at training time, the office side uses this tone signal to notify the subscriber side of the timing which identifies the period in which the effects of crosstalk are received.

10 In a case where the transmit symbol sequence of one burst contains four training symbols, a tone signal indicating the phase of the ISDN 400-Hz signal is transmitted by causing the phase of adjacent training symbols in one burst to change at least one time.

15 Fig. 7A illustrates an example in which the phase of adjacent symbols is caused to change one time in one burst. Here the pattern of the first and second symbols and the pattern of the third and fourth symbols changes from A to B. The symbol patterns can also be changed
20 between the first and second symbols and between the third and fourth symbols. The symbol patterns A and B can be selected in such a manner that the phase difference between them becomes 90° , as shown in the QAM constellation diagram of Fig. 8A, or in such a manner
25 that the phase difference between them becomes 180° , as shown in the QAM constellation diagram of Fig. 8B. That is, 2-bit sets 1 -1, 1 -1, ..., 1 -1 are input to the selector 320 in the case of pattern B in Fig. 8A, and 2-

002260" 88442560

bit sets $-1 -1$, $-1 -1$, \dots , $-1 -1$ are input to the selector 320 in the case of pattern B in Fig. 8B.

Fig. 7B illustrates an example in which the phase of adjacent symbols is caused to change twice in one burst. Here the first and second symbol patterns in the manner $B \rightarrow A$ and the third and fourth symbol patterns change in the manner $A \rightarrow B$. The phase-change points may be chosen in such a manner that the patterns change between any two sets of adjacent symbols.

10 In order to report the phase of the ISDN 400-Hz signal (the transmit phase of the TDD-xDSL on the office side) by the pattern change of Fig. 7A, the training-signal generating circuit 330 generates data in such a manner that the symbol data changes in the manner $A \rightarrow A$
15 $\rightarrow B \rightarrow B$ based upon the rising edge of the ISDN 400-Hz signal TTR that enters from the sequencer 310. This data is subjected to IFFT processing by the IFFT circuit 30 and becomes the training symbol sequence of Fig. 7A, which is then transmitted. On the receiving side,
20 therefore, the time at which the $A \rightarrow B$ phase change occurs is detected and a time which precedes this phase-change time by the time period $T1$ is recognized as being the phase of the rising edge of the ISDN 400-Hz signal TTR. In actuality, the phase of the rising edge of the
25 ISDN 400-Hz signal TTR is decided based upon average values obtained a plurality of times.

In order to report the phase of the ISDN 400-Hz signal (the transmit phase on the office side) by the

09571458 092700

pattern change of Fig. 7B, the training-signal
generating circuit 330 generates data in such a manner
that the symbol data changes in the manner $B \rightarrow A \rightarrow A \rightarrow B$
based upon the rising edge of the ISDN 400-Hz signal TTR
5 that enters from the sequencer 310. This data is
subjected to IFFT processing by the IFFT circuit 30 and
becomes the training symbol sequence of Fig. 7B, which
is then transmitted. On the receiving side, therefore,
the times at which the $B \rightarrow A$, $A \rightarrow B$ phase changes occur
10 are detected, the average T_{avr} of these times is
obtained and a time which precedes this average time by
the set time period T_2 is recognized as being the time
of the rising edge of the ISDN 400-Hz signal TTR. In
actuality, the phase of the rising edge of the ISDN 400-
15 Hz signal TTR is decided based upon average values
obtained a plurality of times. In the example of Fig.
7B, two phase-change times can be detected by a single
training. In comparison with Fig. 7A, therefore, the
phase of the rising edge of the ISDN 400-Hz signal TTR
20 can be decided by a smaller number of operations.

With G.lite also, which likewise is an xDSL scheme,
a method of conveying a change in phase by a tone signal
other than a pilot tone is used. In the present
invention, however, a transmission in the NEXT interval
25 is not carried out, unlike the case with G.lite. As a
consequence, it is unnecessary to distinguish between
the FEXT and NEXT intervals and therefore the method in
which phase is changed can use a 180° change in addition

0074453 092700
007260 29474960

[illegible]

Table 1

Parameter	Value
α_0	0.001
β_0	0.001
γ_0	0.001
δ_0	0.001
ϵ_0	0.001
ζ_0	0.001
η_0	0.001
θ_0	0.001
ϕ_0	0.001
χ_0	0.001
ψ_0	0.001
ω_0	0.001
ν_0	0.001
μ_0	0.001
λ_0	0.001
κ_0	0.001
ι_0	0.001
\hbar_0	0.001
g_0	0.001
f_0	0.001
e_0	0.001
d_0	0.001
c_0	0.001
b_0	0.001
a_0	0.001

[illegible][illegible]

even if the redundancy signals 503, 504 are added onto the beginning and end of the training symbol sequence, four symbols can be sent without reducing the number of symbols per burst.

- 5 (a) Signal transmit interval at normal
 communication time

The transmit interval of a transmit frame at the time of normal communication according to the first embodiment will be described with reference to Fig. 1.

- 10 The symbol 701 with the cyclic prefix (CP) 702 is used at normal communication time in TDD-xDSL transmission. The length of the cyclic prefix can be any length as long as the transmit symbol sequence fits within the transmit interval. In this embodiment, however, the
15 length of the cyclic prefix is made 16 samples (15.635 μ s), which is the same as that in the G992.2 (G.lite) scheme that is one xDSL scheme, and four symbols with a cyclic prefix are connected to construct the transmit symbol sequence 700. The symbol length of the transmit
20 symbol sequence 700, therefore, is 1088 samples (1.0625 ms).

- Fig. 19 illustrates the timing relationship between the transmit symbol sequence 700 for normal communication and a signal in ISDN ping-pong
25 transmission.

The transmit interval of a downstream signal will be considered first. In order to arrange it so that the TDD-xDSL transmit interval will not overlap the receive

09671468 "092700

interval of an ISDN ping-pong transmission with
certainty, the downstream-signal transmit interval of
the TDD-xDSL is placed approximately at the center of
the transmit interval of the ISDN ping-pong
transmission. It is required that the relation
$$S_2 + \alpha_2 + \beta_2 \leq D + a$$
be satisfied as described in accordance with Fig. 3,
where the transmit interval D of an ISDN ping-pong
transmission is equal to 1.178125 ms (1206.4 samples)
and the length S_2 of the TDD-xDSL transmit signal is
equal to 1.0625 ms (1088 samples). If the a' which will
satisfy $a' < a$ is 9.375 (9.6 samples) allowing for
margins, then it will suffice to find the α_2, β_2 that
satisfy

$$S_2 + \alpha_2 + \beta_2 \leq D + a' \leq D + a$$

Since TDD-xDSL downstream transmit interval is brought
to the center of the ISDN ping-pong downstream transmit
interval, we find that $\alpha_2 = \beta_2 = 62.5 \mu\text{s}$ (64 samples).

Similarly, consider the upstream signal interval.

Guard time b between downstream signal reception and
upstream signal transmission in ISDN ping-pong
transmission is a value having a range of $18.75 \mu\text{s}$ (19.2
samples) to $23.4378 \mu\text{s}$ (24 samples).

Since the guard time is a value decided
independently of the TDD-xDSL scheme, the transmit
interval of the TDD-xDSL upstream transmit symbol
sequence cannot be brought exactly to the center of the
upstream transmit interval of the ISDN ping-pong

transmission. Accordingly, to bring the transmit interval of the TDD-xDSL upstream transmit symbol sequence approximately to the center of the upstream transmit interval of the ISDN ping-pong transmission, the guard time of the ISDN ping-pong transmission is regarded as being $18.75 \mu\text{s}$ (19.2 samples), in which case a TDD-xDSL guard time c is selected in such a manner that end time t_{ge1} of the TDD-xDSL guard time and end time t_{eg2} of the ISDN guard time will approximately coincide.

In the first embodiment, (upstream transmit interval of ISDN ping-pong transmission + guard time b) is $1196.875 \mu\text{s}$ and (TDD-xDSL upstream-signal transmit interval $S2$ + beginning and end margins $\alpha2 + \beta2$) is $1187.5 \mu\text{s}$ (1216 samples). Accordingly, guard time c of the TDD-xDSL transmission is selected to be $9.765625 \sim 14.64844$ (10 ~ 15 samples) and transmit timing is decided in a manner similar to that of the downstream signal.

(b) Signal transmit interval at training time

The signal transmit interval at the time of training according to the first embodiment will be described with reference to Figs. 18 and 20. Fig. 18 illustrates the transmit symbol sequence 500 for TDD-xDSL training. It is desired that the redundancy signal 503 added onto the beginning of four successive training symbols 501 be a sufficiently long interval relative to the cyclic prefix 702 at the time of normal

communication. It will be assumed here that a redundancy signal 503 of 125 μ s (128 samples), which is a sufficiently long interval relative to a cyclic prefix having a length of 16 samples (15.625 μ s), is used as an example. Further, a redundancy signal of eight samples (7.8125 μ s) is added on as an example of the redundancy signal 504 added on at the end of the four training symbols. Thus is constructed the transmit symbol sequence 500 for training. As a result, we have $x_1 =$ 10 125 μ s (128 samples), $y_1 = 7.8125 \mu$ s (eight samples). Further, we have $S_1 = 1$ ms (1024 samples = 256×4). From this we obtain

$$S_1 + x_1 + y_1 = 1.132813 \text{ ms (1160 samples).}$$

Next, if we find $(S_1 + \alpha_1 + \beta_1 + x_1 + y_1)$ which falls 15 within $D + a'$ in a manner similar to that at normal communication time, as shown in Fig. 20, we have

$$1.132813 \text{ ms (1160 samples)} + \alpha_1 + \beta_1 \leq 1.1875 \text{ ms} \\ (1216 \text{ samples})$$

Accordingly, $\alpha_1 = 0 \mu$ s (zero samples), $\beta_1 = 54.6875 \mu$ s 20 (56 samples) is selected.

(c) Consideration of worst conditions

Transmission delay in an ISDN ping-pong system and transmission delay in a TDD-xDSL system are decided separately and independently. As a consequence, in a 25 case where an ISDN line is nearby (no delay) and a TDD-xDSL is most remote (maximum delay), there will be instances where, at training time, transmission of an upstream signal from the subscriber side of the ISDN

09571458.093700

starts before the end of reception of a downstream
signal of the TDD-xDSL on the subscriber side, resulting
in a discrepancy between the transmit and receive
timings. Accordingly, consider the worst conditions of
5 a TDD-xDSL transmission transmit/receive interval with
respect to an ISDN transmit/receive interval. In the
first embodiment, the length of the TDD-xDSL
transmission symbol sequence is greater at training time
(i.e., 1160 samples) than at normal communication time
10 (i.e., 1088 samples). Accordingly, consideration will
be given to training time.

(c-1) First worst condition

A worst condition which will be discussed first is
a case where the delay time of a TDD-xDSL transmission
15 is minimum and the delay time of an ISDN ping-pong
transmission is maximum. As shown in Fig. 21, the start
of transmission of an upstream signal in TDD-xDSL
transmission must not occur before ISDN transmission of
a downstream signal ends. In the first embodiment, the
20 latest timing of the end of reception of an ISDN
downstream signal is that obtained by adding a
transmission delay of 50 μ s (51.2 samples) to the length
of 1.178125 ms (1206.4 samples) of the ISDN downstream
transmit signal.

25 On the other hand, the earliest timing of the start
of transmission of a TDD-xDSL transmit signal is the
total obtained by adding beginning and end margin
intervals $\alpha_1 = 0 \mu$ s (zero samples), $\beta_1 = 54.6875 \mu$ s (56

002260 89472960

samples), which precede and follow signal transmission,
to the TDD-xDSL downstream signal interval of 1.132813
ms (1160 samples) and then adding on the upstream-
downstream guard time and beginning margin interval α_1

5 (= 0), which precedes signal transmission. A guard time
of 44.92188 to 49.80469 μ s (46 to 51 samples) between
upstream and downstream TDD-xDSL transmissions is
decided in such a manner that the following will hold:

end of ISDN downstream signal interval <
10 beginning of TDD-xDSL upstream signal

As a result, we have

1.228125 ms (1257.6 samples) [end of ISDN
downstream signal interval] < 1.232422 ms (1262
samples) [beginning of TDD-xDSL upstream signal]

15 Thus the TDD-xDSL upstream signal will not be
transmitted earlier than the end of reception of the
ISDN downstream signal. In other words, even under the
worst condition set forth above, the transmit interval
of the TDD-xDSL transmission falls within the transmit
20 interval of the ISDN unit on the side near the
transmitting ADSL unit.

(c-2) Second worst condition

A worst condition which will be described next is
the converse of the above, i.e., a case where the delay
25 time of a TDD-xDSL transmission is maximum and the delay
time of an ISDN ping-pong transmission is minimum. In
this case, as shown in Fig. 22, the end of the receive
interval of the TDD-xDSL downstream signal must end

002260" 88412360

before the beginning of transmission of the ISDN upstream signal. In the first embodiment, the latest timing of the end of reception of the TDD-xDSL downstream signal is obtained by adding the length of
5 1132.813 μ s (1160 samples) of the TDD-xDSL downstream transmit signal, a transmission delay time of 57.8125 μ s (59.2 samples), a margin of 4.882813 μ s (five samples) for a shift in receive timing and the margin interval α_1 (= 0) μ s (zero samples) that precedes signal
10 transmission.

On the other hand, the earliest transmit timing of the upstream signal in ISDN ping-pong transmission is the result (= 1.196875 ms) of adding the minimum upstream-downstream guard time of 18.75 μ s (19.2
15 samples) to the ISDN downstream interval of 1.178125 ms. Comparing this with the foregoing, we have

$$1.195508 \text{ ms (1224.2 samples) [end of TDD-xDSL downstream signal interval]} < 1.196875 \text{ ms (1225.6 samples) [beginning of ISDN upstream signal]}$$

20 Thus the TDD-xDSL downstream signal is received earlier than the start of transmission of the ISDN upstream signal. As a result, even under the second worst condition set forth above, the transmit interval of the ISDN upstream signal will not overlap the receive
25 interval of the TDD-xDSL downstream signal.

(c-3) Third worst condition

Reference will be had to Fig. 23 to describe that in a case where the delay time of TDD-xDSL transmission

002260" 89472960

is maximum, the receive interval of a TDD-xDSL upstream signal will not overlap the transmit interval of a downstream signal in ISDN ping-pong transmission.

The end of the TDD-xDSL upstream receive signal is
5 2.492578 ms, which is obtained by adding (1) a transmit interval of 1.132813 ms (1160 samples) of the TDD-xDSL downstream signal, (2) a beginning margin interval of $\alpha_1 = 0 \mu s$ (= zero samples) and (3) an end margin interval of $\beta_1 = 54.6875 \mu s$ (56 samples), which precede and
10 follow the signal transmission, (4) a transmission delay of $57.8125 \mu s$ (59.2 samples) $\times 2$ (because of the two directions, namely upstream and downstream), (5) summation of an upstream-downstream maximum guard time of $49.80469 \mu s$ (51 samples) and a margin of $4.882813 \mu s$
15 (5 samples) for the shift of receive timing, (6) the transmit interval of 1.132813 ms (1160 samples) of the TDD-xDSL upstream signal, (7) a margin interval of $\alpha_1 = 0 \mu s$ (zero samples) that precedes the transmission of the signal and (8) a margin of 0.976567 (one sample) \times
20 2, which is for a delay in rise time when the DMT symbol starts to be sent or a remaining signal when transmission of the DMT symbol is stopped,
On the other hand, the burst cycle of the ISDN ping-pong transmission is 2.5 ms. Comparing this with the
25 foregoing, we have

$$\begin{aligned} & 2.492578 \text{ ms (2552.4 samples) [end of TDD-xDSL} \\ & \text{upstream signal interval]} < 2.5 \text{ ms (2560} \\ & \text{samples) [ISDN burst cycle]} \end{aligned}$$

007260" 89472960

Thus the reception of the TDD-xDSL upstream ends earlier than the start of transmission of the next ISDN downstream signal. In other words, even if the delay time of the TDD-xDSL transmission is maximum, the
5 receive interval of the TDD-xDSL upstream signal will not span the ISDN transmit interval of the next burst.

The foregoing is a review of worst conditions. However, in a case where an ISDN line and a TDD-xDSL metallic line are adjacent to each other, these are
10 connected to the same office and therefore the worst conditions are not possible in actuality.

For example, in a case where an ISDN line has no transmission delay time and the transmission delay time of a TDD-xDSL is maximum, the ISDN unit DSU on the
15 subscriber side is disposed alongside the central office CN and the TDD-xDSL unit xTU-R on the subscriber side is disposed at a location remote from the central office, as shown in Fig. 24A. In a case where an upstream signal from the ISDN unit DSU leaks into the TDD-xDSL under
20 these circumstances, the fact that noise is transmitted from the location at which the ISDN unit DSU is disposed to the location at which the TDD-xDSL unit xTU-R is disposed results in a transmission delay. If the transmission of the downstream TDD-xDSL signal from
25 the office side has ended, therefore, the upstream signal of the ISDN line will be unaffected.

Conversely, in a case where the transmission delay time of the ISDN line is maximum and the TDD-xDSL has no

09071453 092700

transmission delay, the ISDN unit DSU on the subscriber side is disposed at a location remote from the central office CN and the TDD-xDSL unit xTU-R on the subscriber side is disposed at a location alongside the central office, as shown in Fig. 24B. In this case also the fact that the upstream signal of the TDD-xDSL transmission leaks into the ISDN unit DSU on the subscriber side as noise results in transmission delay. If the transmission of the ISDN downstream signal from the office side has ended, therefore, the ISDN line will be unaffected.

(d) Phase difference between transmit symbol sequences at training time and normal communication time

The phase difference between the transmit symbol sequence for training and the transmit symbol sequence for normal communication time will be described with reference to Fig. 25. The difference between the starting position of the leading symbol 501 at training time and the starting position of the leading symbol 701 from which the cyclic prefix (CP) has been removed at normal communication time is $\theta d1 = 46.875 \mu s$ (48 samples) in case of a downstream signal and $\theta d2 = 82.0312 \mu s$ (48 samples) in case of an upstream signal, as will be obvious from Fig. 25.

Since $3.90625 \mu s$ (four samples) is one pilot tone cycle, the phase differences $\theta d1$, $\theta d2$ are 12 and 21 times the pilot tone, respectively, and therefore the requirement that the phase differences be a whole-number

multiple of the pilot-tone cycle is satisfied.

(2) Second embodiment

As in the case of the G.lite scheme, the second
embodiment relates to a case where 4.3125 kHz is
5 selected as the carrier frequency spacing, 256 as the
number of samples and #64 as the carrier which transmits
the pilot tone.

According to the second embodiment, the sampling
frequency is 1104 kHz and the pilot-tone frequency is
10 276 kHz. Accordingly, $3.623188 \mu\text{s}$ (four samples)
constitutes one pilot tone cycle in a manner similar to
that of the first embodiment. Further, in the second
embodiment, the length of the cyclic prefix is, e.g.,
 $28.98551 \mu\text{s}$ (32 samples), which is longer than in the
15 case of the G.lite scheme, the length of the redundancy
signal 503 added onto the beginning at training time is
 $115.94203 \mu\text{s}$ (128 samples), which is a redundancy length
sufficiently longer than the cyclic prefix of the G.lite
scheme, and the length of the redundancy signal added on
20 at the end is $18.11594 \mu\text{s}$ (20 samples). In view of the
foregoing, the structures of the transmit symbol
sequences 500, 700 at normal communication time and
training time, respectively, are as shown in Fig. 26.

The signal transmit interval at normal
25 communication time in the second embodiment will be
described with reference to Fig. 27. If it is so
arranged that the TDD-xDSL signal transmit interval is
brought to approximately the center of the transmit

09671458 092700

interval of the ISDN ping-pong transmission in a manner similar to that of the first embodiment, then, if the following hold:

$$D + a' = 1.1875 \text{ ms (1311 samples)}$$

5 $S2 = 1.043478 \text{ ms (1152 samples)}$

we have $\alpha1 + \beta2 = 144.0217 \mu\text{s (159 samples)}$ and therefore $\alpha2 = 70.65217 \mu\text{s (78 samples)}$ and $\beta2 = 73.36957 \mu\text{s (81 samples)}$ are selected.

Similarly, the signal transmit interval at training
10 time in the second embodiment is illustrated in Fig. 28.

Since the following hold:

$$D + a' = 1.1875 \text{ ms (1311 samples)}$$

$$S1 + x1 + y1 = 1.061594 \text{ ms (1172 samples)}$$

we have $\alpha1 + \beta1 = 125.9058 \mu\text{s (139 samples)}$.

15 Accordingly, if it is so arranged that the TDD-xDSL signal transmit interval is brought to approximately the center of the transmit interval of the ISDN ping-pong transmission in a manner similar to that of the first embodiment, $\alpha1 = 63.4057 \mu\text{s (70 samples)}$ and $\beta1 = 62.5$
20 $\mu\text{s (69 samples)}$ are selected.

If the above-described first, second and third worst conditions are taken into consideration in the second embodiment, (1), (2) and (3) set forth below will hold, where the guard time between upstream and
25 downstream signals is 27.17391 to $31.7029 \mu\text{s (30 to 40 samples)}$:

- (1) $1.228125 \text{ ms (1355.85 samples)}$ [latest end of
ISDN downstream signal interval]

09671468 092700

< 1.27808 ms (1411 samples) [earliest
beginning of TDD-xDSL upstream signal
interval];

5 (2) 1.92029 ms (1316 samples) [latest end of
TDD-xDSL downstream signal interval]

< 1.96875 ms (1321.35 samples) [earliest
beginning of ISDN upstream signal
interval]; and

10 (3) 2.475543 ms (2733 samples) [end of
TDD-xDSL upstream signal interval]
< 2.5 ms (2760 samples) [ISDN burst cycle].

In accordance with (1), the upstream signal of the
TDD-xDSL transmission will not be transmitted earlier
than the end of reception of the ISDN downstream signal
15 even under the first worst condition.

In accordance with (2), the TDD-xDSL downstream
signal is received earlier than the start of
transmission of the ISDN upstream signal under the
second worst condition.

20 In accordance with the (3), reception of the TDD-
xDSL upstream signal ends earlier than start of
transmission of the ISDN downstream signal of the next
burst.

25 With reference to Fig. 26, the phase difference
between the transmit symbol sequence 700 for normal
communication and the transmit symbol sequence 500 at
the time of training is $79.71014 \mu\text{s}$ (88 samples), which
is equal to the pilot-tone cycle $\times 22$. Thus the phase

002260 89472950

difference is a whole-number multiple of the pilot tone (i.e., 22 times the pilot tone).

Thus, in a digital subscriber line transmission system based upon TDD-xDSL in accordance with the present invention, training for establishing communication can be speeded up, communication reliability can be enhanced and the structure of the communications equipment can be simplified over that of the prior art.

More specifically, in accordance with the present invention, it is so arranged that in a TDD-xDSL transmission, a DMT symbol sequence is transmitted upon adding some data that is contained within the DMT symbol sequence onto the beginning or end or onto both the beginning and end of the sequence as redundancy data at the time of training, which is carried out before normal communication, and the redundancy data is removed on the receiving side. As a result, distortion develops in the redundancy data but not in the training symbols. This makes it possible to carry out training using all training symbols and to shorten training time.

Further, in accordance with the present invention, the length of the transmit training symbol sequence after the redundancy data is added on is made such that the training symbol sequence will fall within the transmit interval of an ISDN ping-pong transmission or of another TDD-xDSL transmission. In other words, it is so arranged that the training symbol sequence will not

007260 8947960
09671468 092700

5

10

20

25

communication, the timing regeneration signal (pilot tone) does not develop a phase shift. This makes accurate processing possible.

Further, in TDD-xDSL transmission according to the present invention, when the subscriber side is notified of transmit timing (the phase of an ISDN 400-Hz signal) of a TDD-xDSL burst signal on the office side, a tone signal the phase whereof varies one or more times within one transmission burst is transmitted separately of the pilot-tone signal, and this change in the phase of the tone signal is detected on the subscriber side to identify the transmit timing of the TDD-xDSL burst signal. As a result, a correct TDD-xDSL transmission can be performed by detecting the transmit timing (the phase of an ISDN 400-Hz signal) at the time of training of a TDD-xDSL transmission. In this case the phase of the tone signal can be changed 90 or 180°. This makes it possible to recognize transmit timing even if transmit timing (the phase of the ISDN 400-Hz signal) is unknown initially. Further, in accordance with the present invention, the subscriber side is capable of recognizing intervals in which the office side is influenced by crosstalk from neighboring lines and therefore can transmit upstream data to the office side upon removing these intervals.

As many apparently widely different embodiments of the present invention can be made without departing from the spirit and scope thereof, it is to be understood

002260" 8947/2950

that the invention is not limited to the specific
embodiments thereof except as defined in the appended
claims.

09674453 092700
007260 8947260

WHAT IS CLAIMED IS:

1. A digital subscriber line transmission method for transmitting downstream data from a device on an office side to a device on a subscriber side and upstream data
5 from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-division fashion, dividing data of one symbol, modulating carrier waves having different frequencies by each item of divided
10 data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals a few symbols at a time, said method comprising the steps of:
- generating a training symbol sequence, which comprises a plurality of successive symbols, in bursts
15 on a training-symbol transmitting side at time of training carried out prior to data communication;
- adding some data that is contained within the training symbol sequence onto at least one of the beginning and end of this symbol sequence; and
20 transmitting the training symbol sequence onto which some of the data has been added to a training-symbol receiving side.
2. A digital subscriber line transmission method for transmitting downstream data from a device on an office
25 side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-division fashion,

09674468 092700

dividing data of one symbol, modulating carrier waves having different frequencies by each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals a few
5 symbols at a time, said method comprising the steps of:

generating a training symbol sequence, which comprises a plurality of successive symbols, in bursts on a training-symbol transmitting side at time of training carried out prior to data communication;

10 adding some data that is contained within the training symbol sequence onto at least one of the beginning and end of this symbol sequence;

transmitting the training symbol sequence onto which some of the data has been added to a training-
15 symbol receiving side; and

removing the data, which has been added onto the training symbol sequence, on the receiving side.

3. The method according to claim 1 or 2, wherein length of a training symbol sequence after data has been added
20 thereon at the time of training and of a transmit symbol sequence at time of normal communication is set in such a manner that the symbol sequence will not fall within an interval in which effects of near-end crosstalk from a neighboring line are received.

25 4. A digital subscriber line transmission method for transmitting downstream data from a device on an office side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on

007250.092700

the office side over a single line by switching between these data transmissions in time-division fashion, dividing data of one symbol, modulating carrier waves having different frequencies by each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals in bursts a few symbols at a time, said method comprising the steps of:

- generating a pilot-tone signal with which
- 10 synchronously processing is executed;
- generating the pilot-tone signal with which
- synchronously processing is executed;
- making the length of an interval in which a signal is not being transmitted between contiguous transmit
- 15 burst symbol sequences a whole-number multiple of the cycle of the pilot-tone signal; and
- assuring continuity of sample data in contiguous transmit burst symbol sequences by executing processing in sync with the pilot-tone signal.

- 20 5. A digital subscriber line transmission method for transmitting downstream data from a device on an office side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between
- 25 these data transmissions in time-division fashion, dividing data of one symbol, modulating carrier waves having different frequencies by each item of divided data and frequency-multiplexing the modulated signals,

007463 092700

and transmitting the frequency-multiplexed signals a few symbols at a time with a cyclic prefix attached onto each symbol, said method comprising the steps of:

- generating a pilot-tone signal with which
- 5 synchronously processing is executed;
- making a phase difference between phase of a training symbol and phase of a transmit symbol from which a cyclic prefix has been removed at time of normal communication a whole-number multiple of a pilot-tone
- 10 cycle; and

executing training processing and processing for normal data communication in sync with the pilot-tone signal.

- 6. A digital subscriber line transmission apparatus for
- 15 transmitting downstream data from a device on an office side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-division fashion,
- 20 dividing data of one symbol, modulating carrier waves having different frequencies by each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals a few symbols at a time, said apparatus comprising:

- 25 a training symbol generating unit for generating a training symbol sequence, which comprises a plurality of successive symbols, in bursts at time of training carried out prior to data communication;

09674468 "092700

a redundancy data add-on unit for adding some data that is contained within the training symbol sequence onto at least one of the beginning and end of this symbol sequence as redundancy data; and

5 a transmitting unit for transmitting the training symbol sequence onto which the redundancy data has been added to a training-symbol receiving side.

7. A digital subscriber line transmission apparatus for transmitting downstream data from a device on an office
10 side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-division fashion, dividing data of one symbol, modulating carrier waves
15 having different frequencies by each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals a few symbols at a time, said apparatus comprising:

a training symbol generating unit for generating a
20 training symbol sequence, which comprises a plurality of successive symbols, in bursts at time of training carried out prior to data communication;

a redundancy data add-on unit for adding some data that is contained within the training symbol sequence
25 onto at least one of the beginning and end of this symbol sequence as redundancy data;

a transmitting unit for transmitting the training symbol sequence onto which the redundancy data has been

09571458.092700

added to a training-symbol receiving side;

a receiving unit for receiving the training symbol sequence onto which the redundancy data has been added;

a redundancy-data removal unit for removing the
5 redundancy data that has been added onto the training symbol sequence; and

a training processor for executing processing based upon a training symbol from which the redundancy data has been removed.

10 8. The apparatus according to claim 6 or 7, further comprising means for setting length of a training symbol sequence after the redundancy data has been added thereon at the time of training and of a transmit symbol sequence at time of normal communication is set in such
15 a manner that the symbol sequence will not fall within an interval in which effects of near-end crosstalk from a neighboring line are received.

9. A digital subscriber line transmission apparatus for transmitting downstream data from a device on an office
20 side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-division fashion, dividing data of one symbol, modulating carrier waves
25 having different frequencies by each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals in bursts a few symbols at a time, said apparatus

007260" 2947250

comprising:

a pilot-tone signal generator for generating a pilot-tone signal with which synchronously processing is executed;

5 means for making the length of an interval in which a signal is not being transmitted between contiguous transmit burst symbol sequences a whole-number multiple of the cycle of the pilot-tone signal; and

means for executing processing in sync with the
10 pilot-tone signal and assuring continuity of sample data in contiguous transmit burst symbol sequences.

10. A digital subscriber line transmission apparatus for transmitting downstream data from a device on an office side to a device on a subscriber side and
15 upstream data from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-division fashion, dividing data of one symbol, modulating carrier waves having different frequencies by
20 each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals a few symbols at a time with a cyclic prefix attached onto each symbol, said apparatus comprising:

25 a pilot-tone signal generator for generating a pilot-tone signal with which synchronously processing is executed;

means for making a phase difference between phase

09671468 092700

of a training symbol and phase of a transmit symbol from which a cyclic prefix has been removed at time of normal communication a whole-number multiple of a pilot-tone cycle; and

5 means for executing training processing and processing for normal data communication in sync with the pilot-tone signal.

11. A digital subscriber line transmission system for transmitting downstream data from a device on an office
10 side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-division fashion, dividing data of one symbol, modulating carrier waves
15 having different frequencies by each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals a few symbols at a time, said apparatus comprising:

a training-symbol transmitting unit for
20 transmitting a training symbol via the line at time of training carried out prior to data communication; and

a training-symbol receiving unit for receiving a training symbol via said line;

said training-symbol transmitting unit including:

25 a training-symbol generating unit for generating a training symbol sequence comprising a plurality of successive symbols;

a redundancy data add-on unit for adding some

007260" 8947260

data that is contained within the training symbol sequence onto at least one of the beginning and end of this symbol sequence as redundancy data; and

a transmitting unit for transmitting the training symbol sequence onto which the redundancy data has been added to the training-symbol receiving unit; and

said training-symbol receiving unit includes:

a receiving unit for receiving the training symbol sequence onto which the redundancy data has been added;

a redundancy-data removal unit for removing the redundancy data that has been added onto the training symbol sequence; and

a training processor for executing processing based upon a training symbol from which the redundancy data has been removed.

12. The system according to claim 11, wherein said line and another line on which transmission of downstream data and transmission of upstream data are performed in time-division fashion are accommodated in a cable which connects said training-symbol transmitting unit and said training-symbol receiving unit; and

said training-symbol transmitting unit has means for setting length of a training symbol sequence after redundancy data has been added thereon and of a transmit symbol sequence at time of normal communication in such a manner that the symbol sequence will not fall within

007260" 2947.950

an interval in which effects of near-end crosstalk from said other line are received.

13. A digital subscriber line transmission method for transmitting downstream data from a device on an office side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-division fashion, dividing data of one symbol, modulating carrier waves having different frequencies by each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals in bursts a few symbols at a time, said method comprising the steps of:
- 15 incorporating timing information, which specifies an interval in which effects of crosstalk from a neighboring line are received, in a training symbol sequence at time of training carried out prior to data communication; and
 - 20 transmitting the training symbol sequence in which the timing information is incorporated from the device on the office side to the device on the subscriber side.
14. The method according to claim 13, wherein when said neighboring line is a line which transmits data by
- 25 switching between transmission of the downstream data and transmission of the upstream data in time-division fashion, the timing information indicates a reference timing for switching between transmission of the

007260" 89472960

downstream data and transmission of the upstream data in time-division fashion in the neighboring line.

15. The method according to claim 13 or 14, wherein the timing information is incorporated in the training
5 symbol sequence by varying the phase of training symbols.

16. The method according to claim 15, wherein the phase of adjacent symbols constructing a training symbol sequence is varied by 90° or 180°.

10 17. The method according to claim 15, wherein a carrier wave of a predetermined frequency is quadrature modulated and the phase between adjacent symbols obtained by quadrature modulation is varied.

18. A digital subscriber line transmission apparatus
15 for transmitting downstream data from a device on an office side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between these data transmissions in time-
20 division fashion, dividing data of one symbol, modulating carrier waves having different frequencies by each item of divided data and frequency-multiplexing the modulated signals, and transmitting the frequency-multiplexed signals in bursts a few symbols at a time,
25 said apparatus comprising:

timing-information insertion means for inserting timing information, which specifies an interval in which effects of crosstalk from a neighboring line are

007260 8947960

received, into a training symbol sequence at time of training carried out prior to data communication; and

a transmitting unit for transmitting the training symbol sequence, into which the timing information has
5 been inserted, from the device on the office side to the device on the subscriber side.

19. The apparatus according to claim 18, wherein when said neighboring line is a line which transmits data by switching between transmission of the downstream data
10 and transmission of the upstream data in time-division fashion, said timing-information insertion means inserts timing information indicative of a reference timing for switching between transmission of the downstream data and transmission of the upstream data in time-division
15 fashion in the neighboring line.

20. The apparatus according to claim 20, wherein said timing-information insertion means inserts the timing information into the training symbol sequence by varying the phase between adjacent training symbols.

20 21. The apparatus according to claim 20, wherein said timing-information insertion means varies by 90° or 180° the phase of adjacent symbols constructing a training symbol sequence.

22. A digital subscriber line transmission system for
25 transmitting downstream data from a device on an office side to a device on a subscriber side and upstream data from the device on the subscriber side to the device on the office side over a single line by switching between

004260 "0947450

these data transmissions in time-division fashion,
dividing data of one symbol, modulating carrier waves
having different frequencies by each item of divided
data and frequency-multiplexing the modulated signals,
5 and transmitting the frequency-multiplexed signals in
bursts a few symbols at a time, said system comprising:

a cable for accommodating said line as a first line
and another line as a second line on which transmission
of downstream data and transmission of upstream data are
10 performed in time-division fashion;

a training-symbol transmitting unit for
transmitting a training symbol via said first line at
time of training carried out prior to data
communication; and

15 a training-symbol receiving unit for receiving a
training symbol via said first line;

said training-symbol transmitting unit including:

timing-information insertion means for
inserting timing information, which specifies an
20 interval in which effects of crosstalk from said second
line are received, into a training symbol sequence at
time of training carried out prior to data
communication; and

means for transmitting the training symbol
25 sequence into which the timing information is inserted
from the device on the office side to the device on the
subscriber side; and

said training-symbol receiving unit includes:

007260" 8947960

means for extracting the timing information
from the training symbol sequence; and

a processor for executing training processing
based upon this timing information.

- 5 23. The system according to claim 22, wherein said
timing-information insertion means inserts the timing
information into the training symbol sequence by varying
the phase between adjacent training symbols.

09674438 092700

ABSTRACT OF THE DISCLOSURE

When training carried out prior to data communication is performed in digital subscriber line transmission (xDSL), the side which transmits training symbols adds some data that is contained in a training symbol sequence onto at least one of the beginning and end of this symbol sequence and then transmits the training symbol sequence. The receiving side removes the data that has been added onto the training symbol sequence and executes training processing. The length of the training symbol sequence and of a transmit symbol sequence at time of normal communication is set in such a manner that the symbol sequence will not fall within an interval in which effects of near-end crosstalk from a neighboring line are received. Further, at the time of training prior to data communication, timing information, which specifies an interval in which effects of crosstalk from a neighboring line are received, is inserted into a training symbol sequence and the training symbol sequence is transmitted from a device on the office side to a device on the subscriber side.

FIG. 1

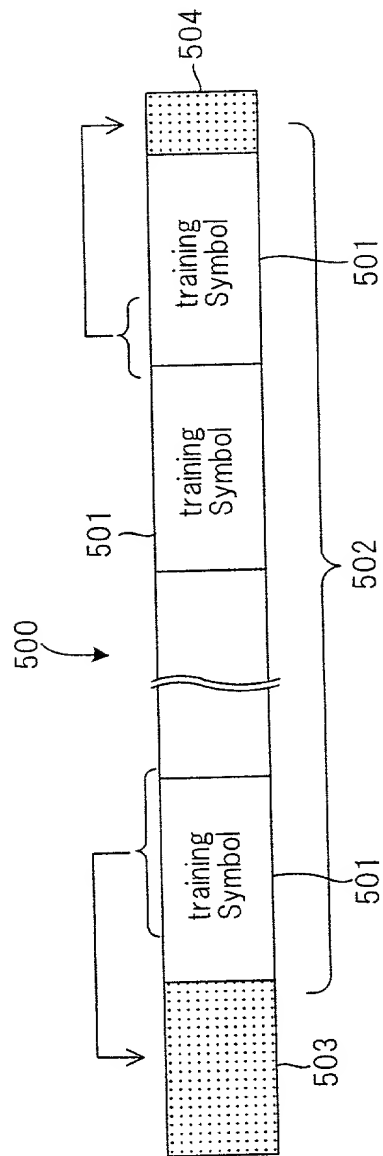


FIG. 2

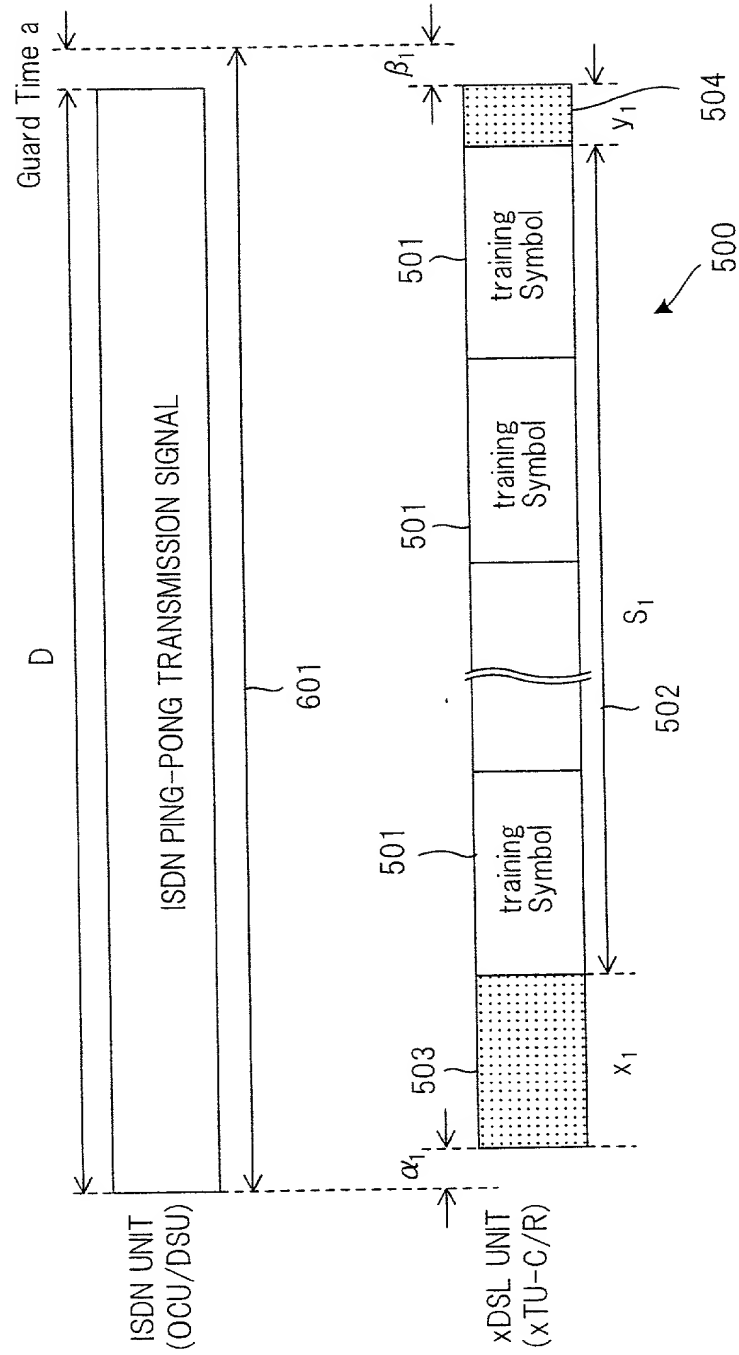


FIG. 3

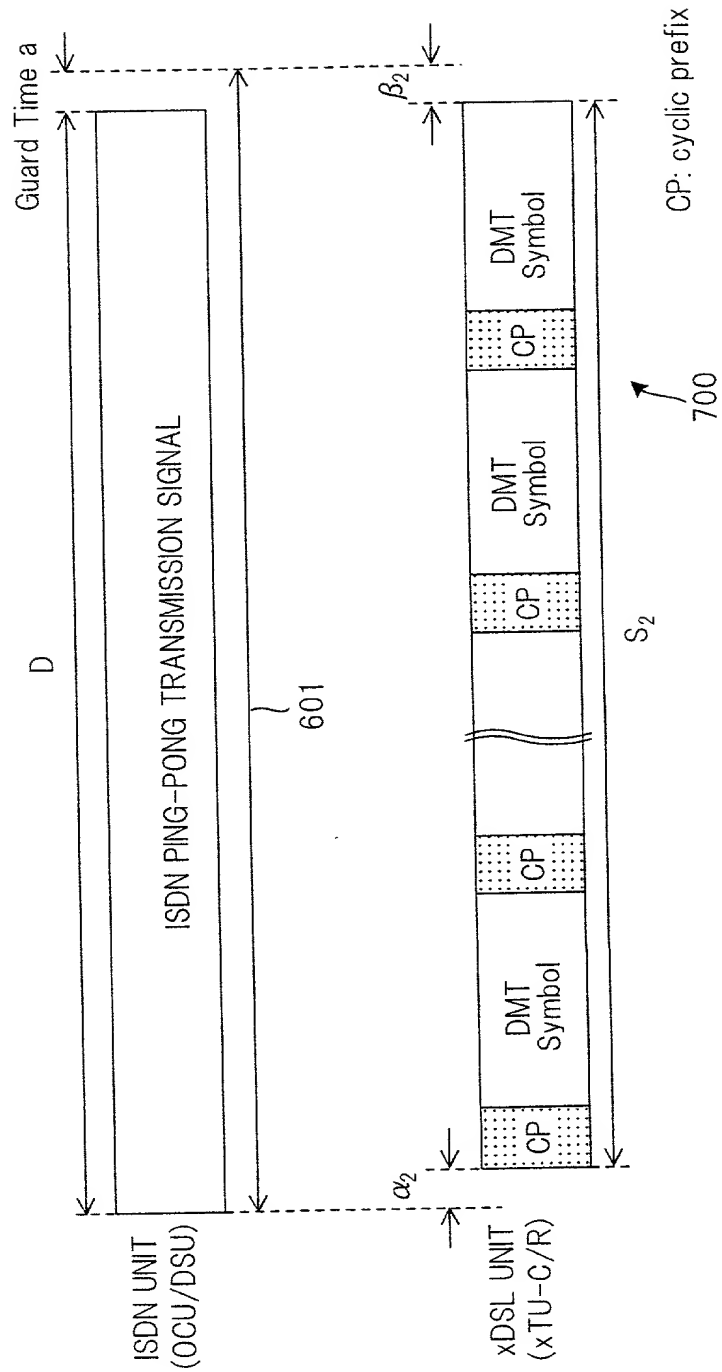


FIG. 4

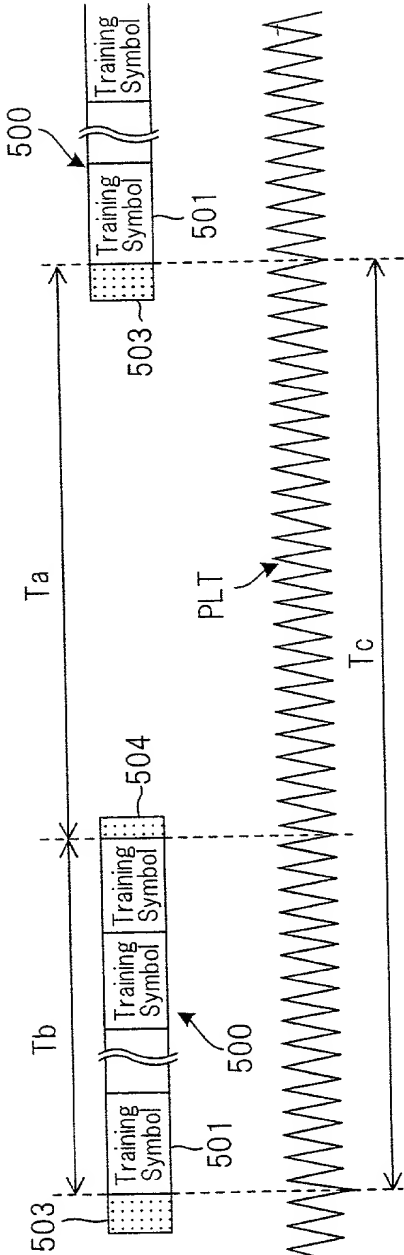


FIG. 5

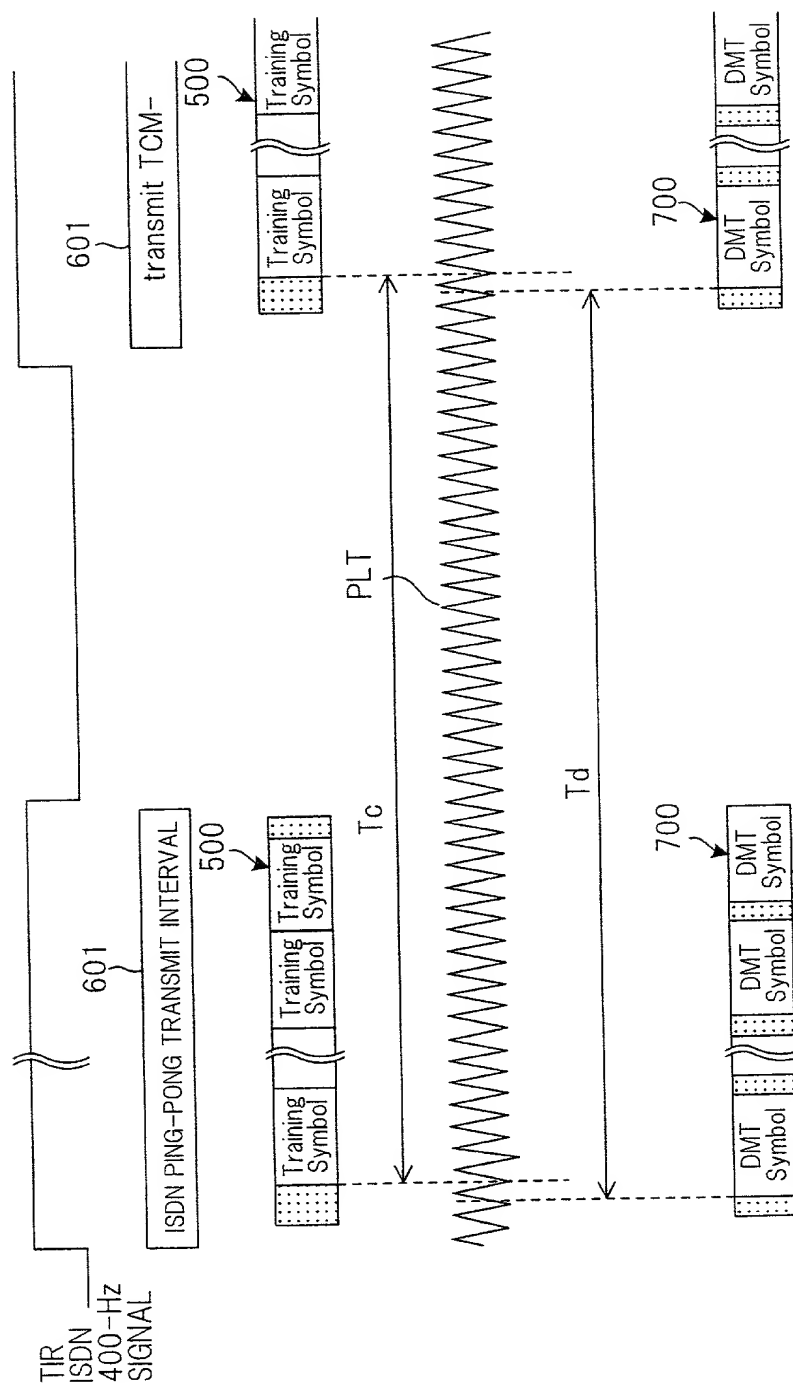


FIG. 7A

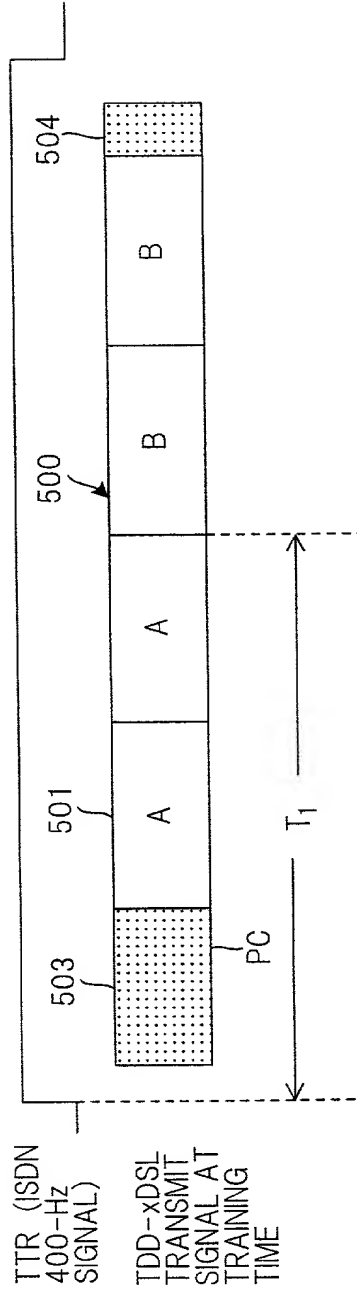


FIG. 7B

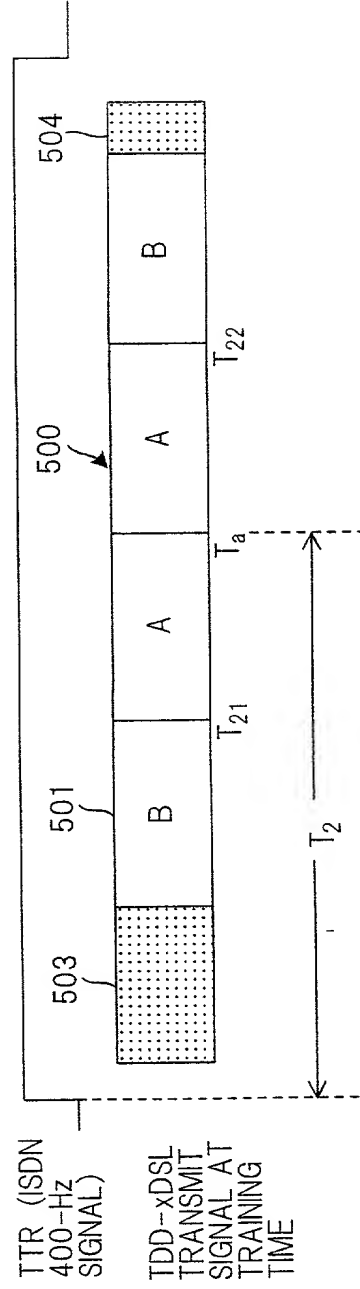


FIG. 8B

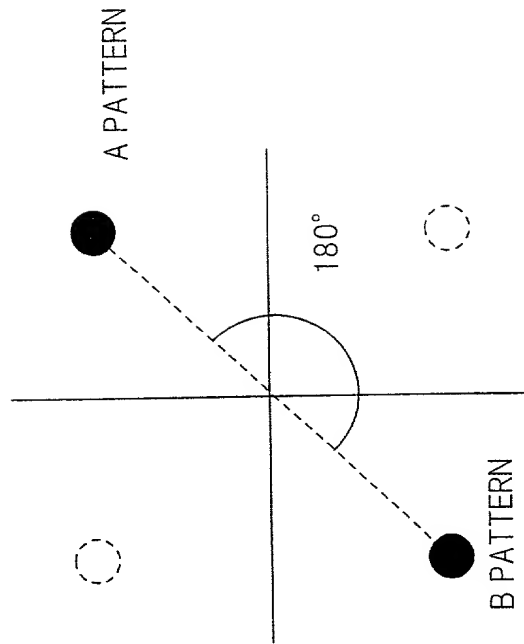


FIG. 8A

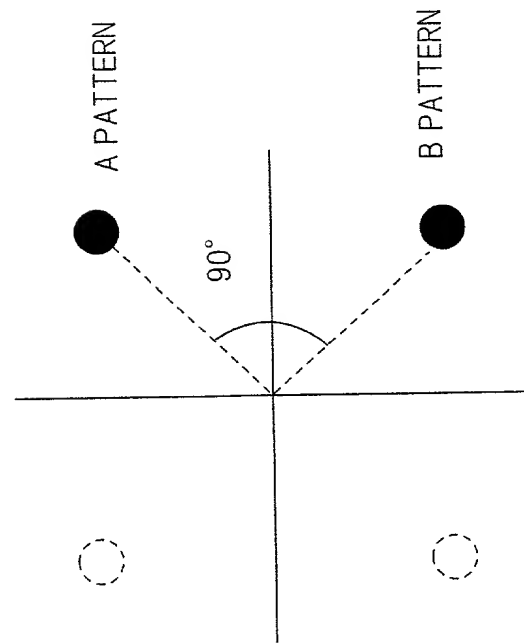


FIG. 9

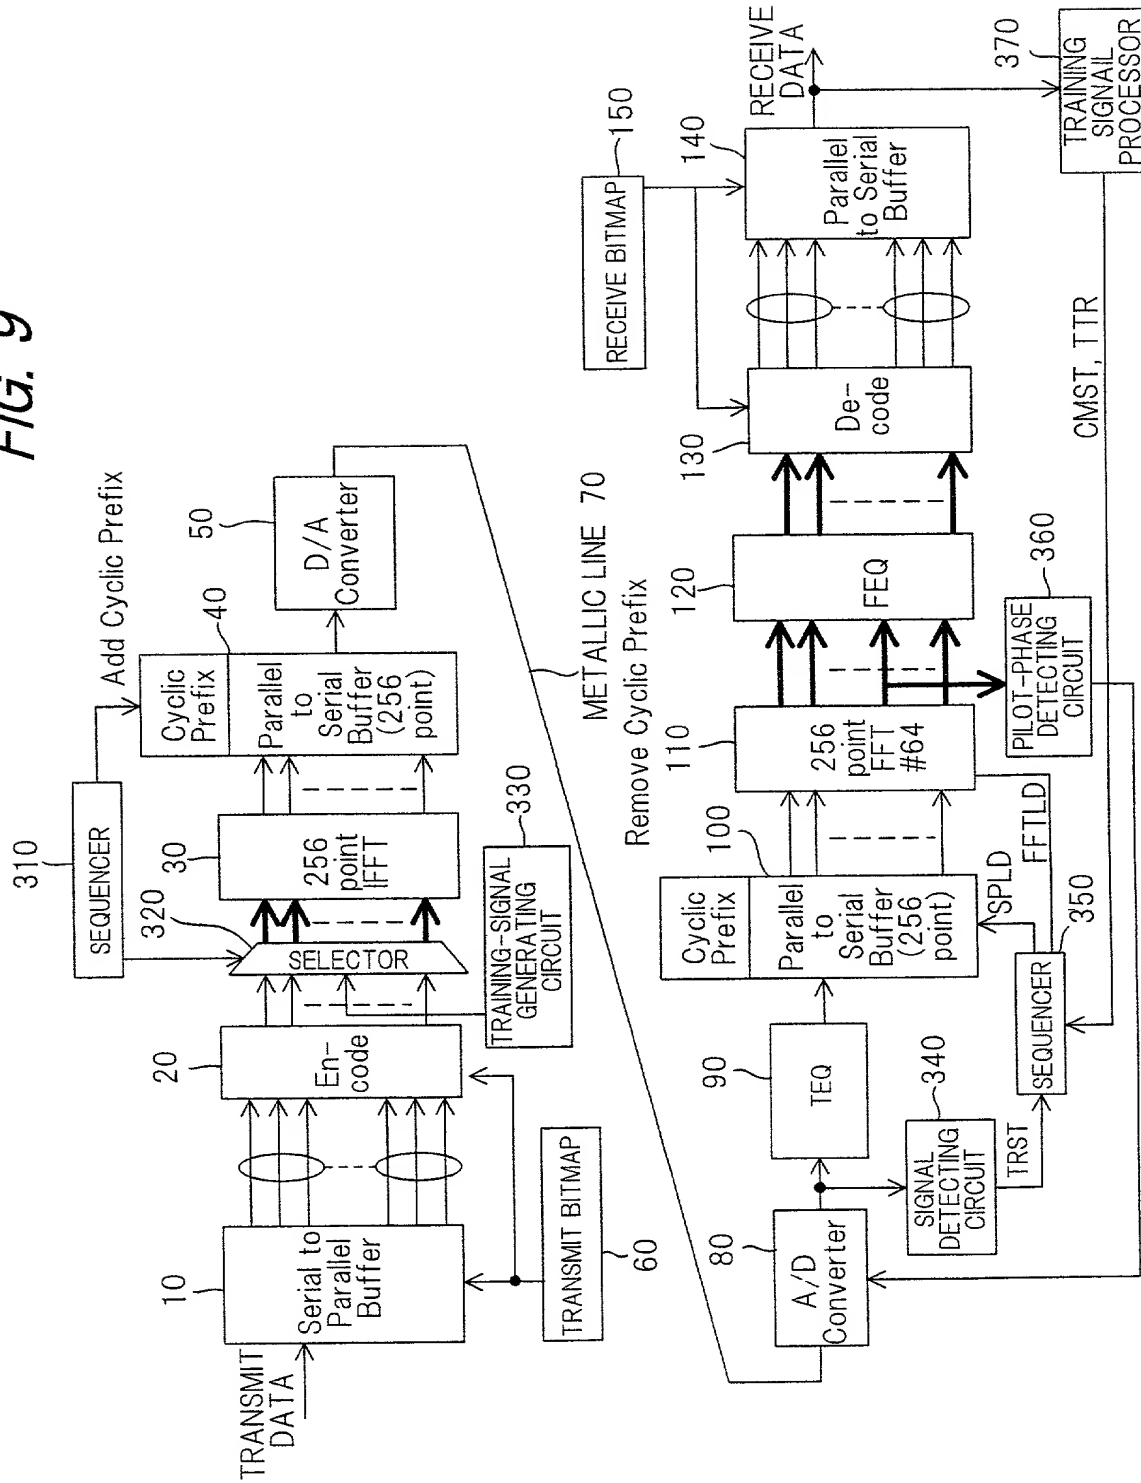


FIG. 10

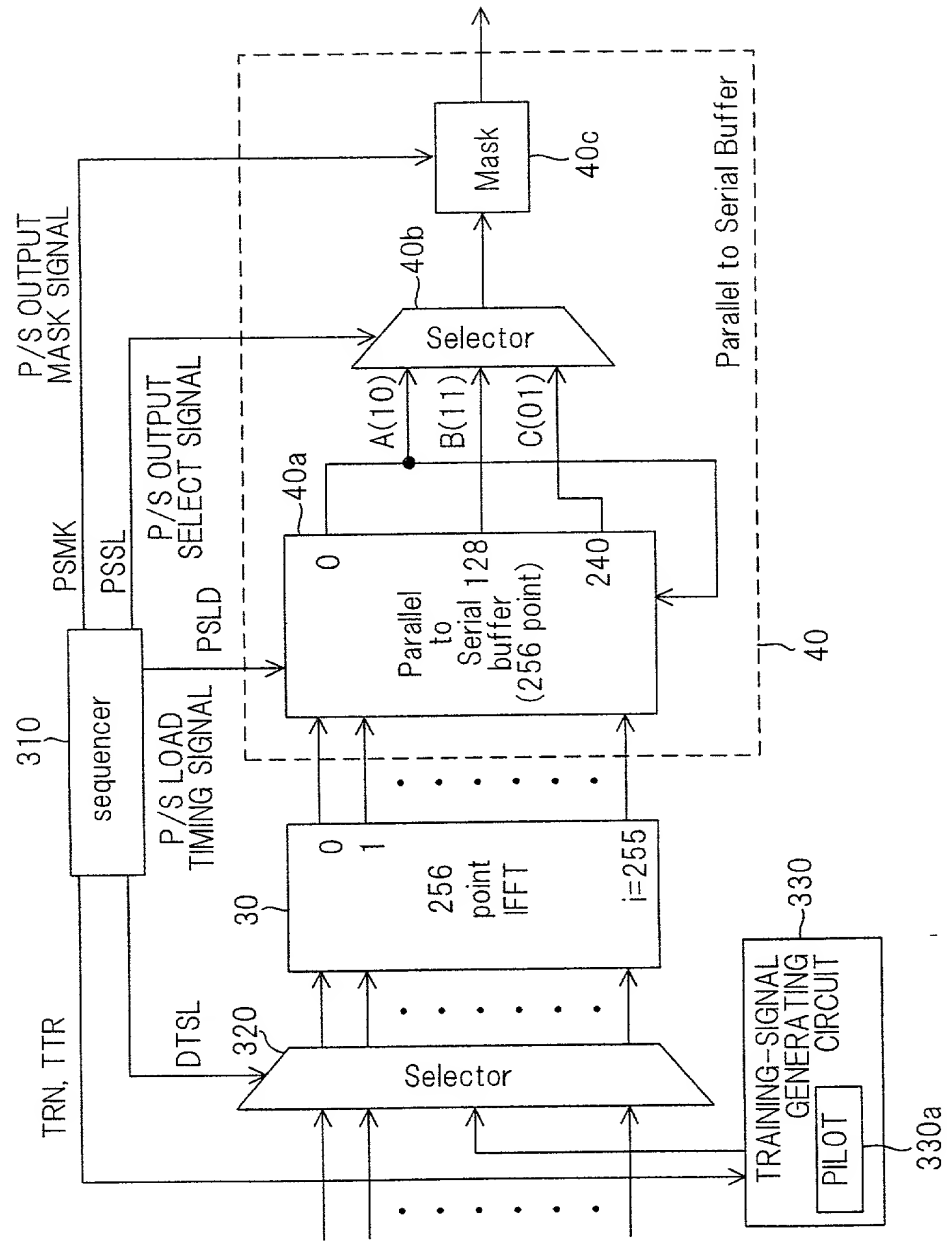


FIG. 11

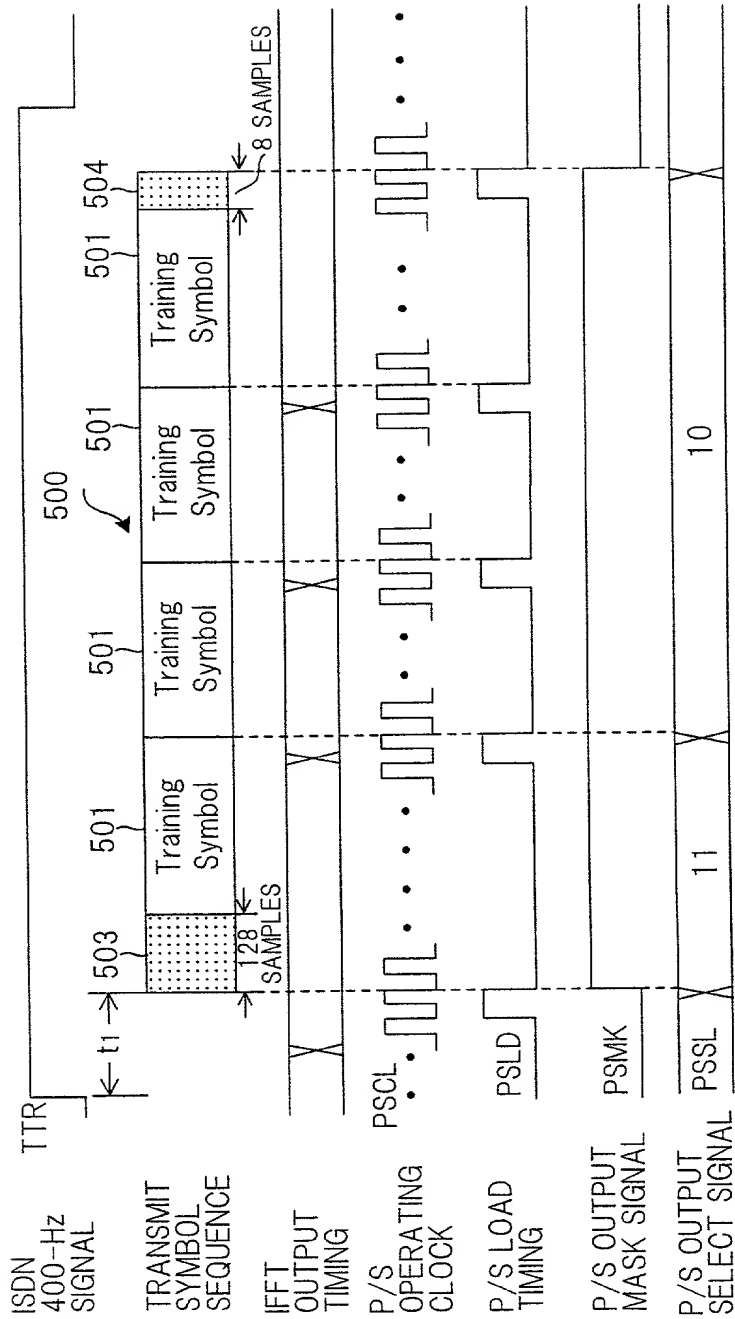
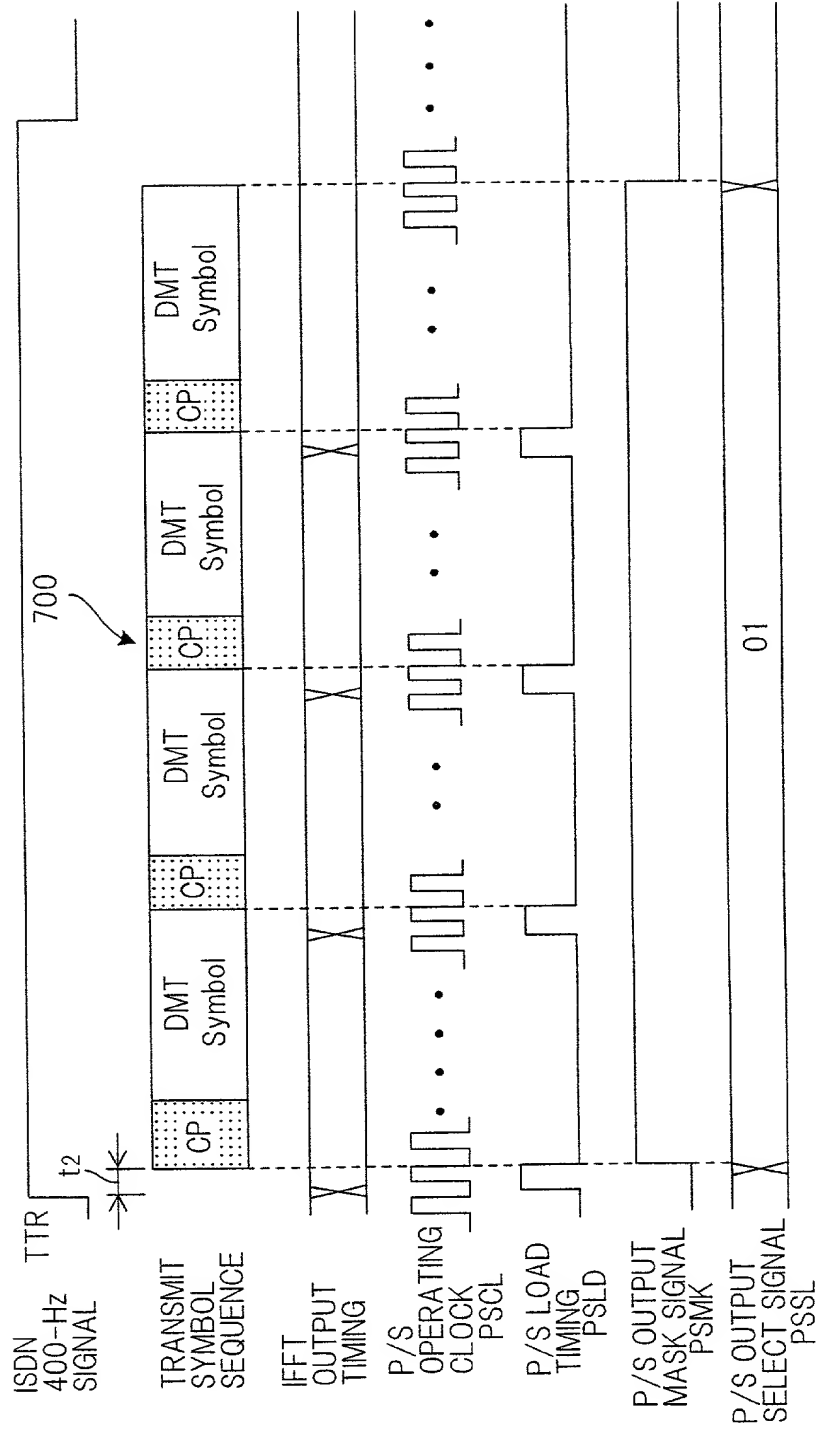


FIG. 12



CP: cyclic prefix

FIG. 13

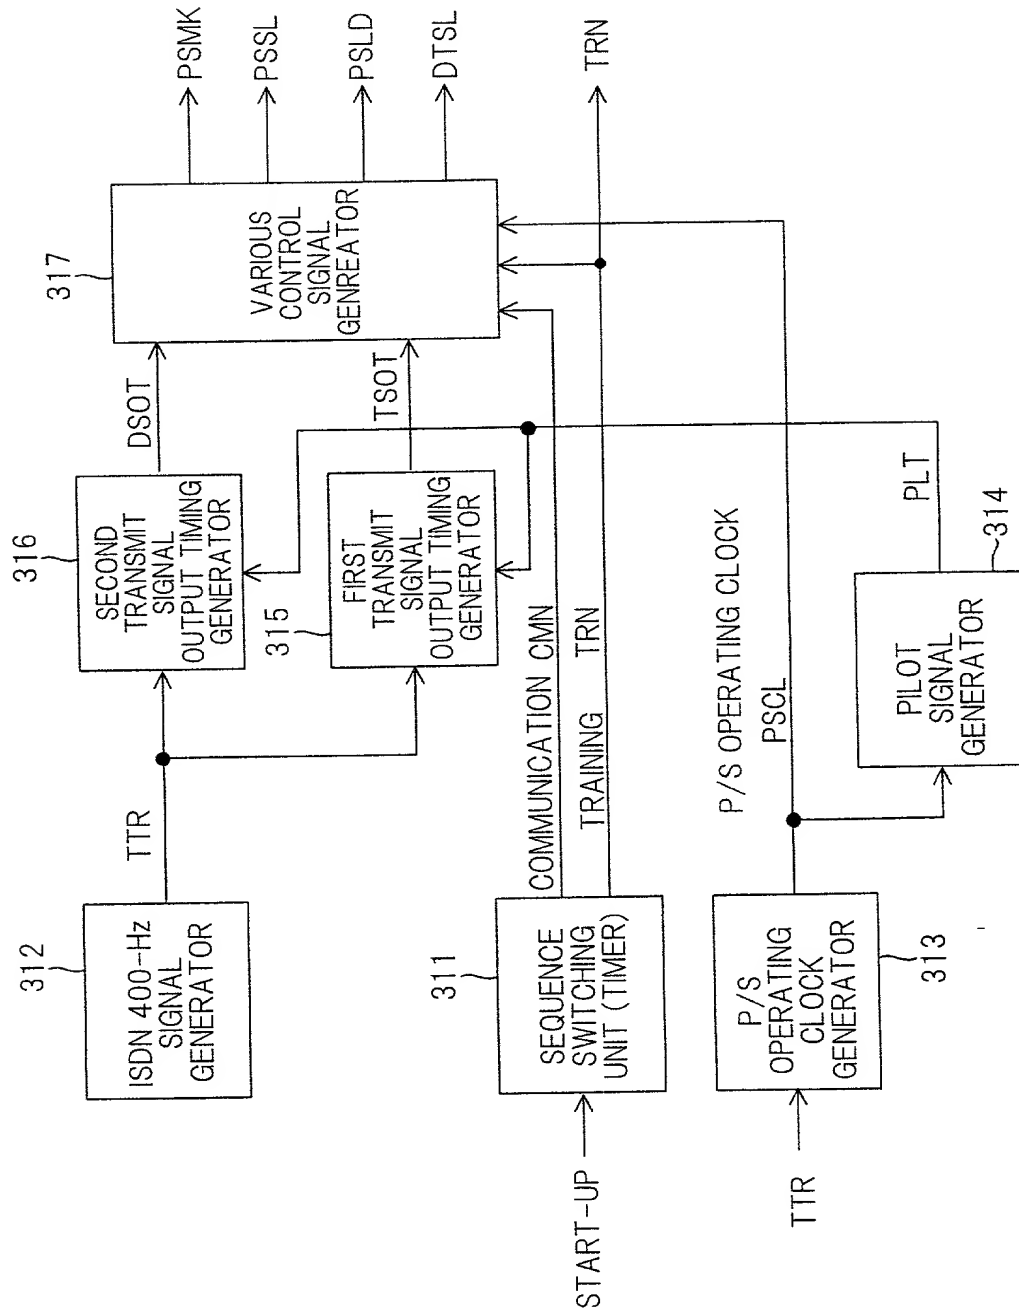


FIG. 14

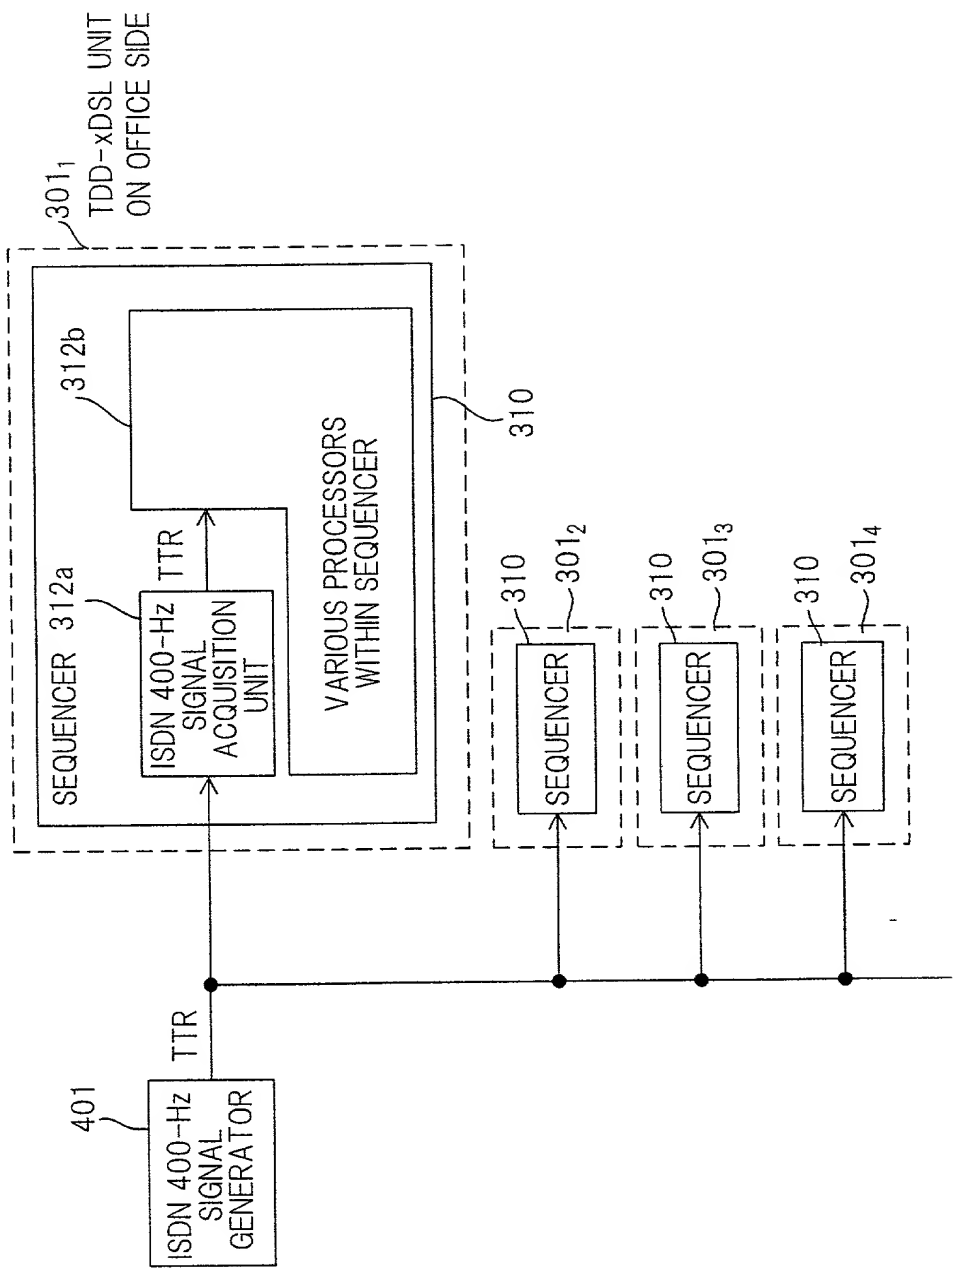


FIG. 15

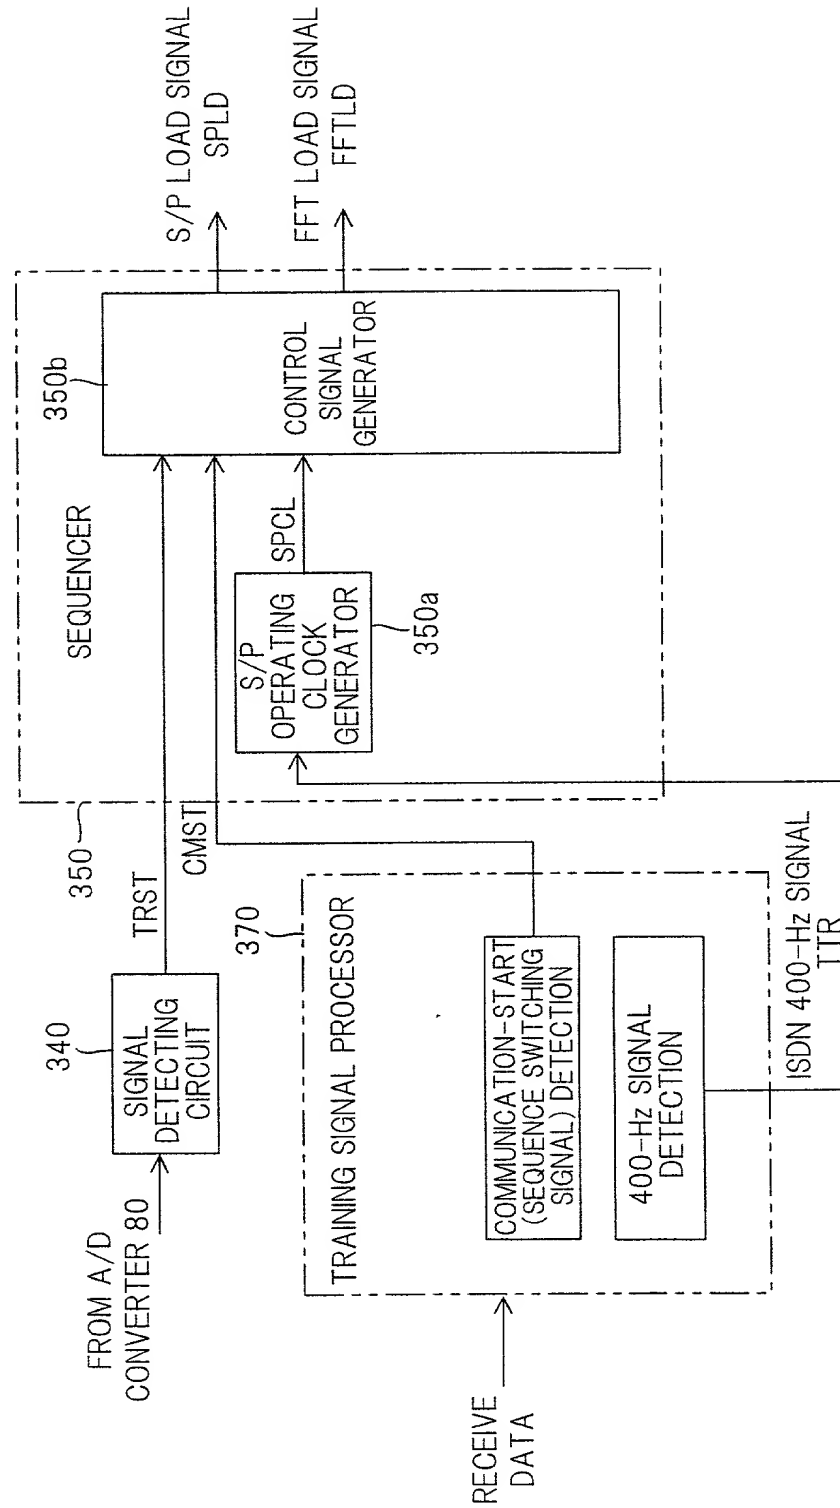


FIG. 16

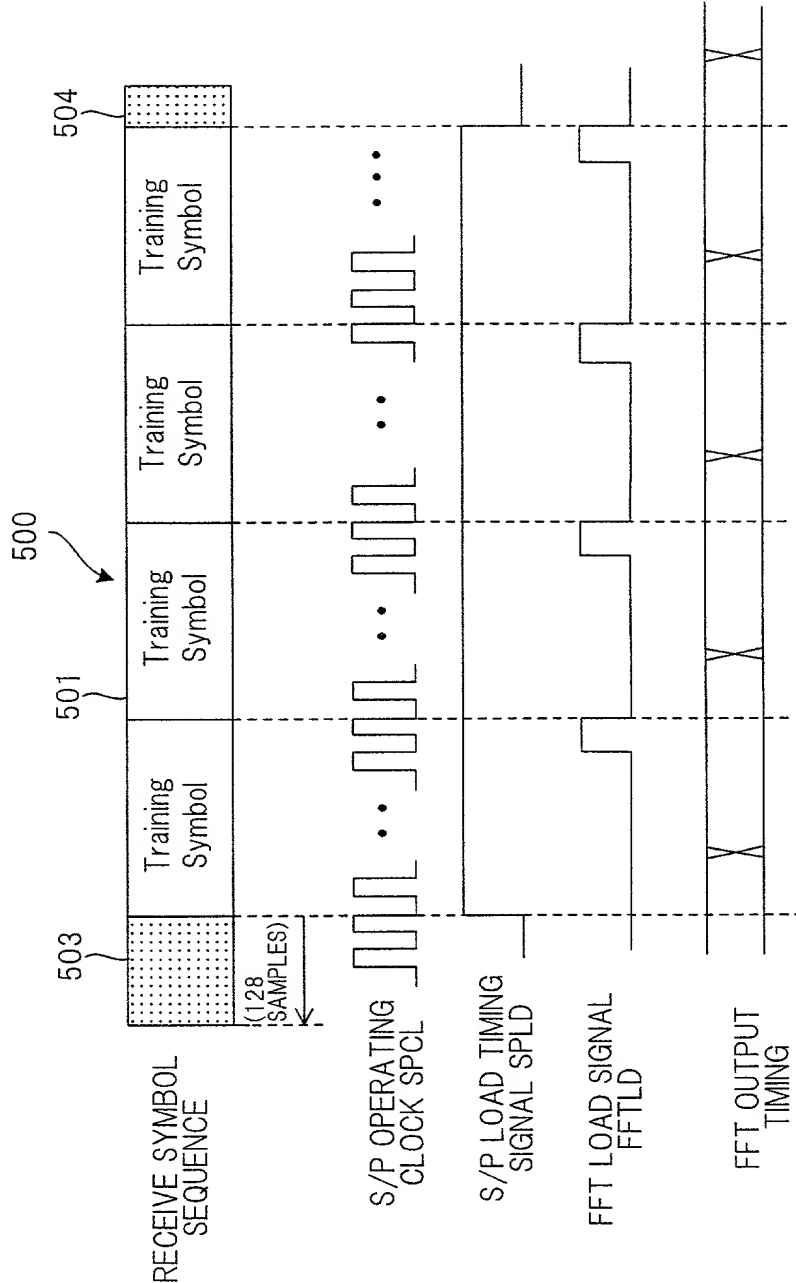


FIG. 17

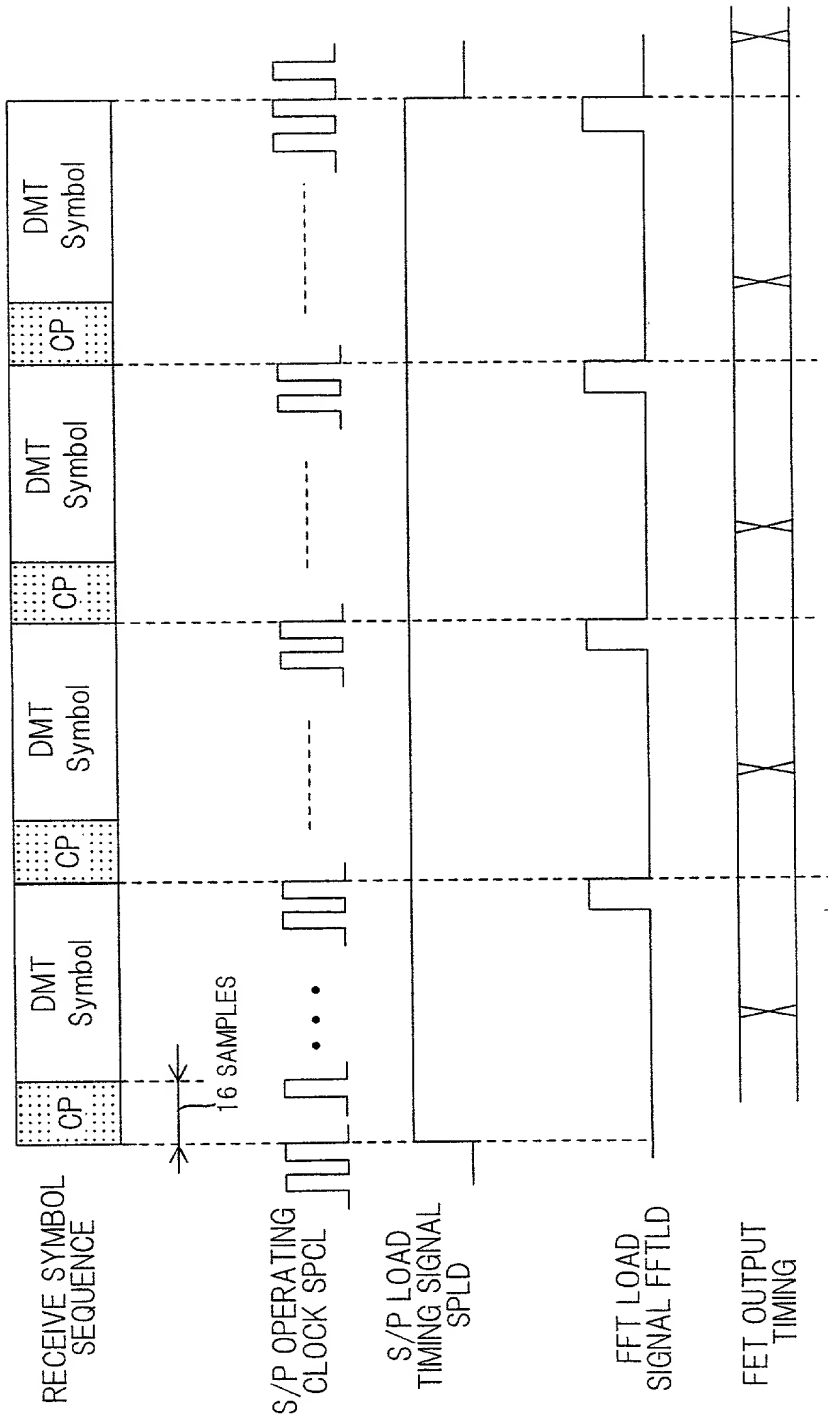


FIG. 18

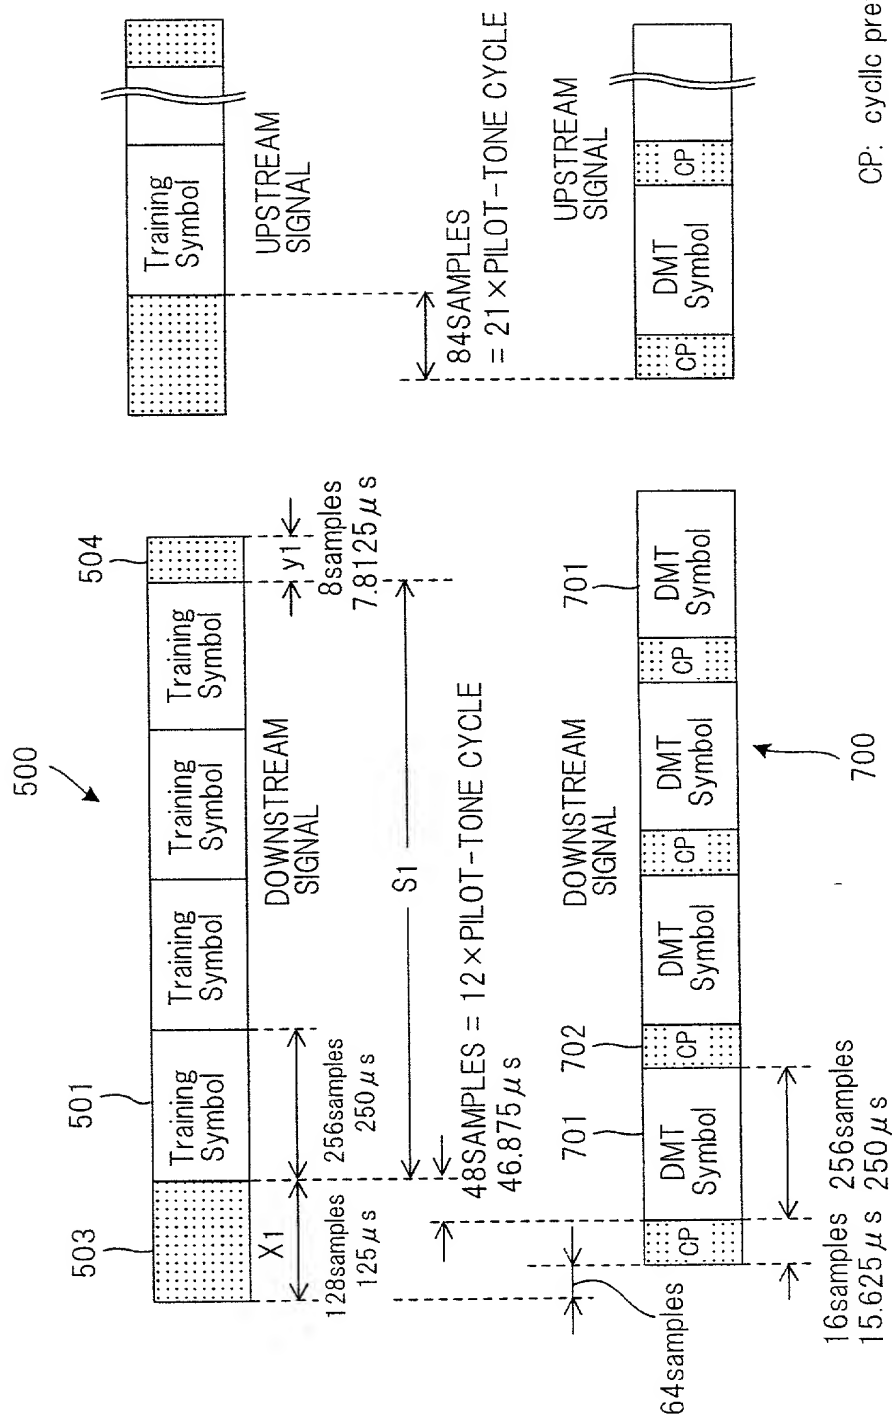


FIG. 19

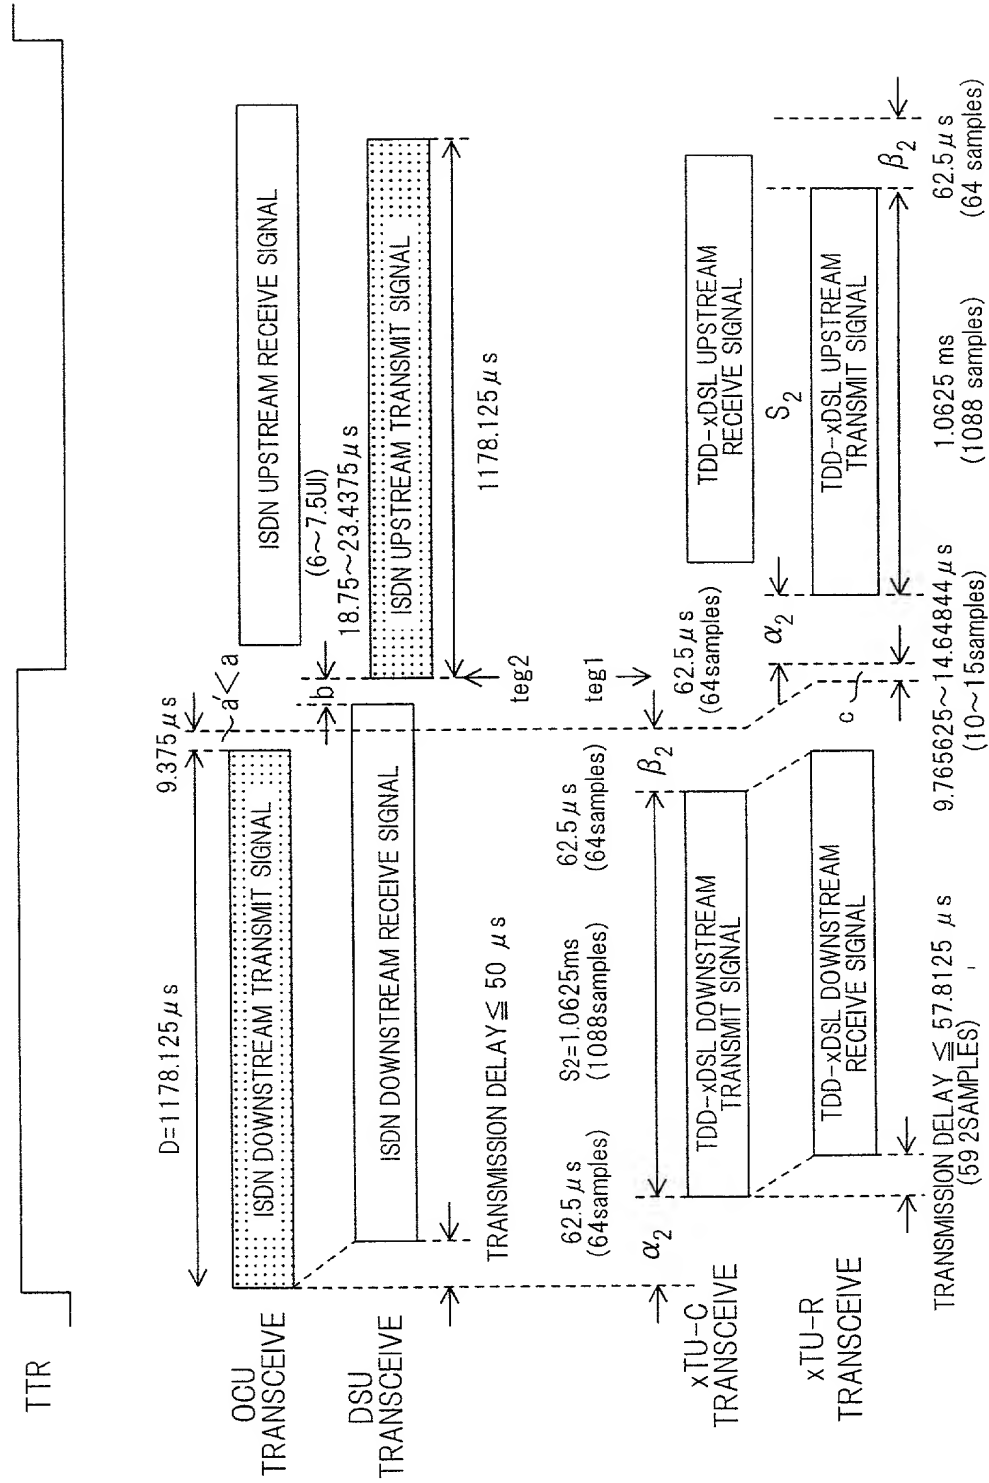


FIG. 20

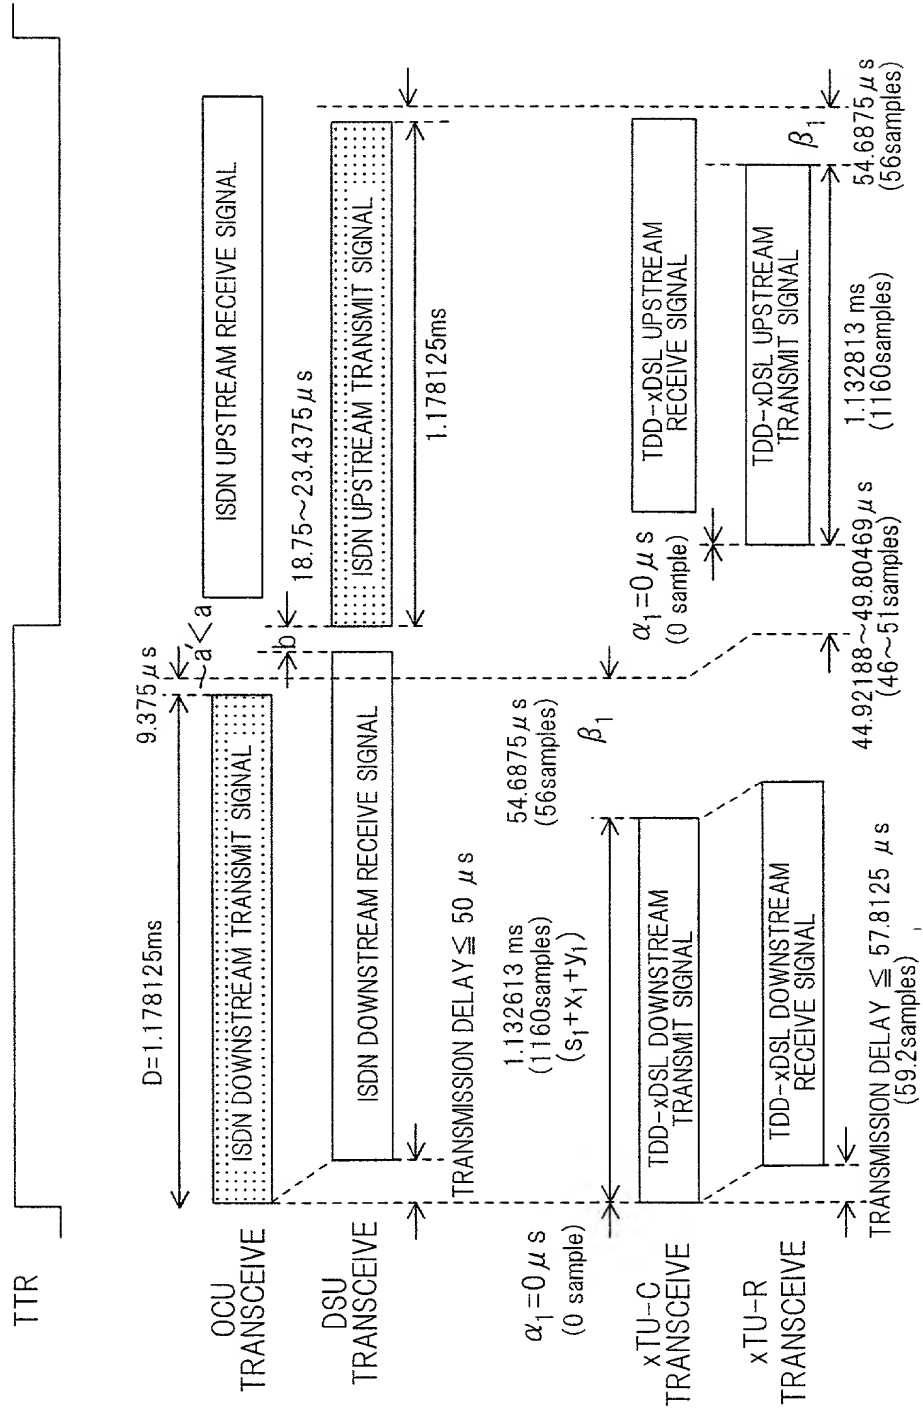


FIG. 21

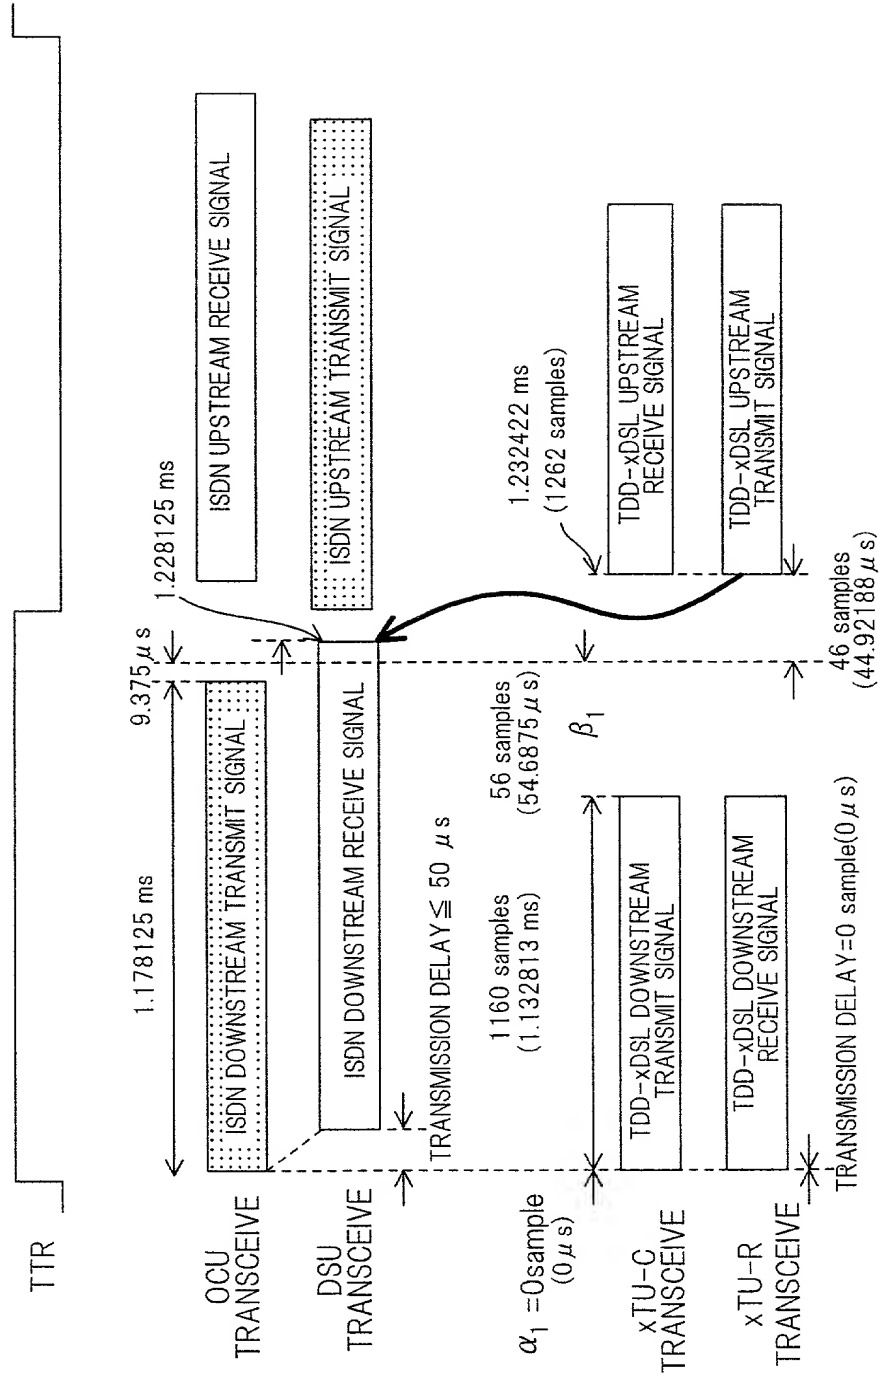


FIG. 22

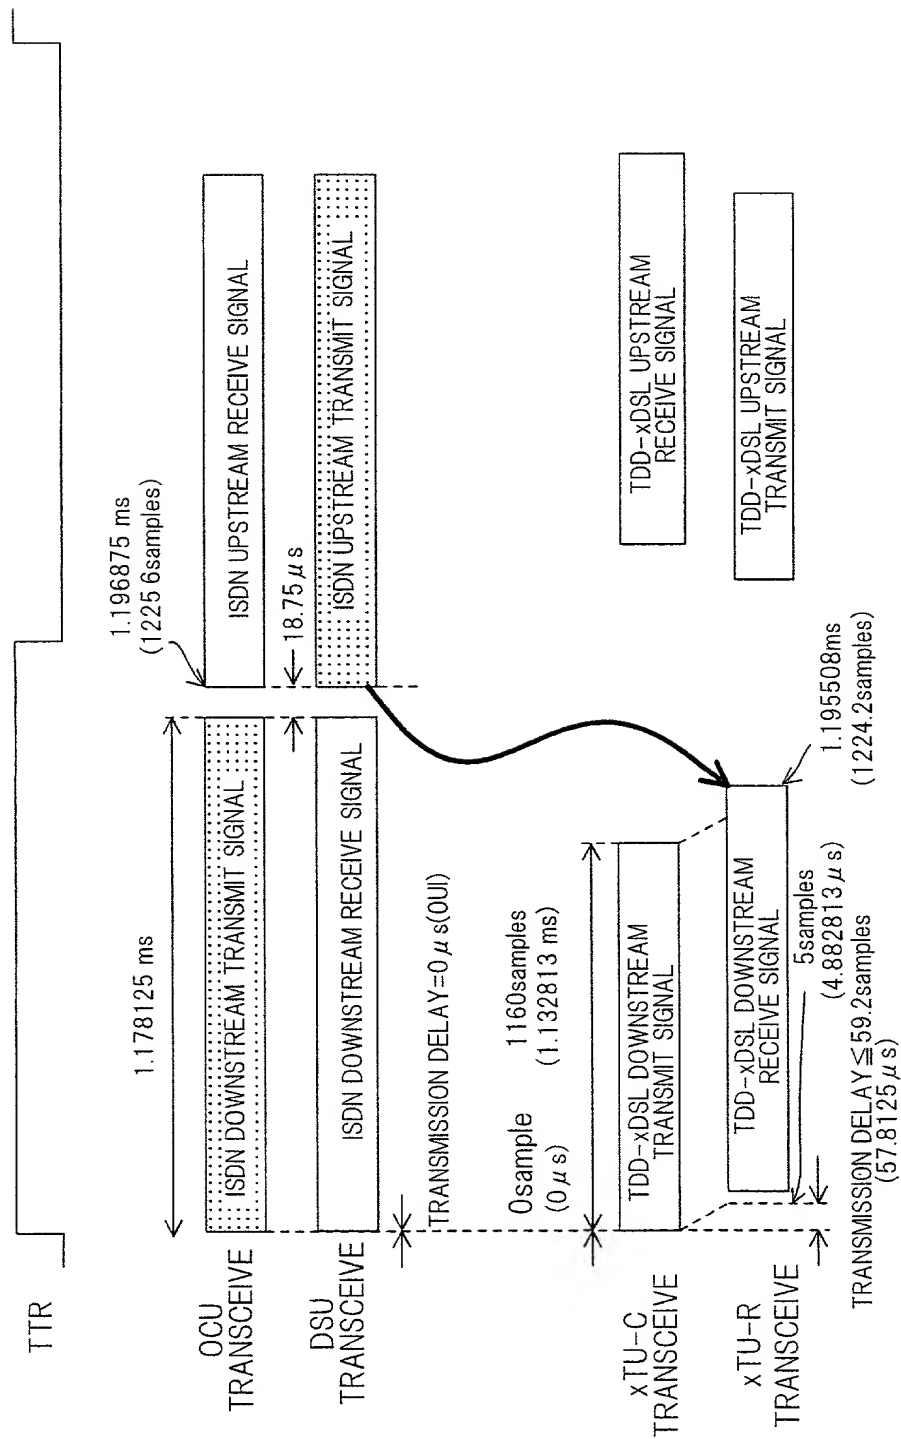


FIG. 23

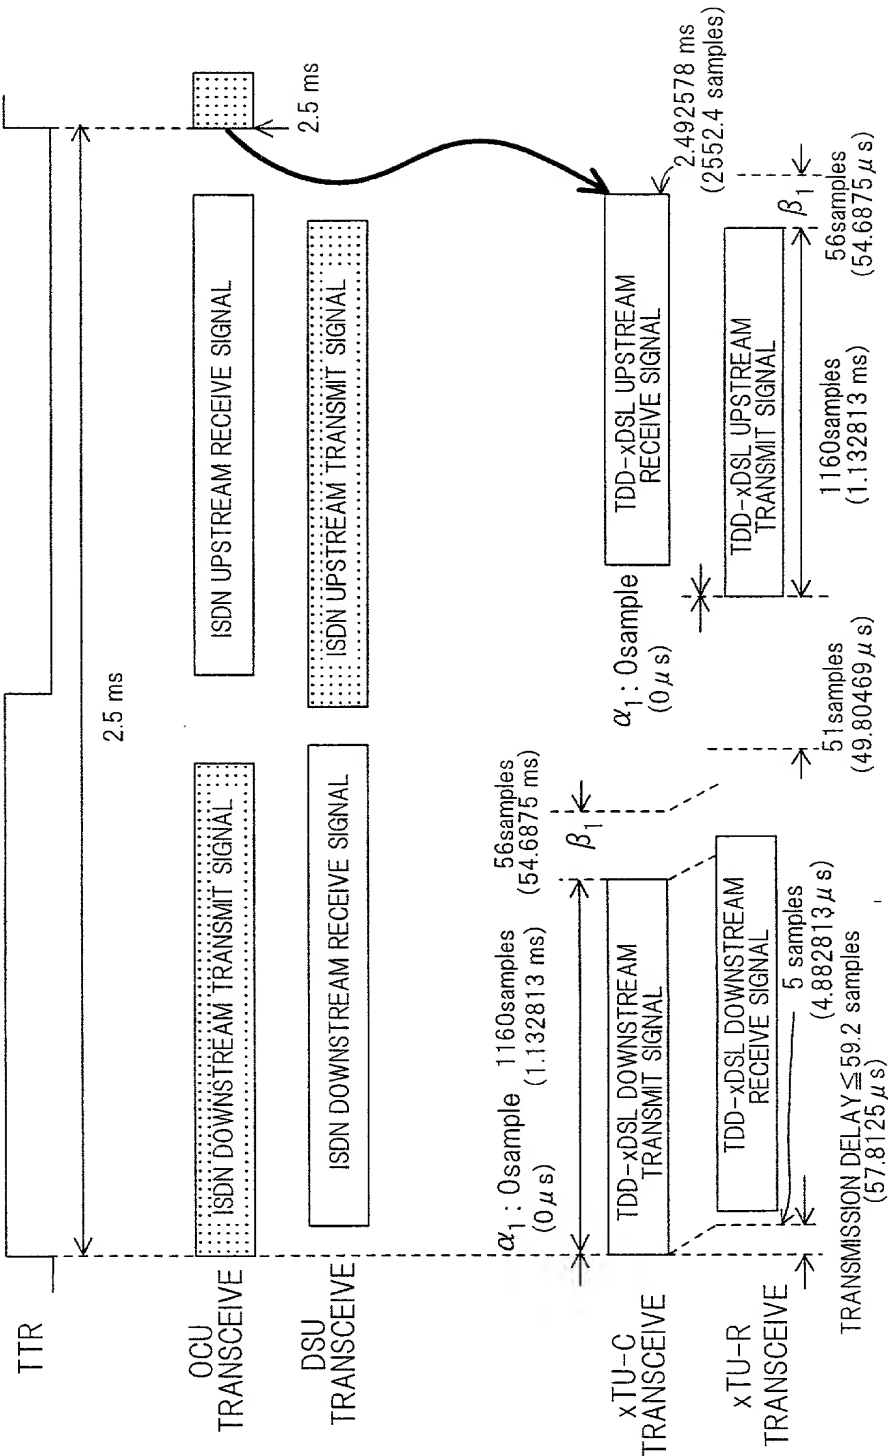


FIG. 25

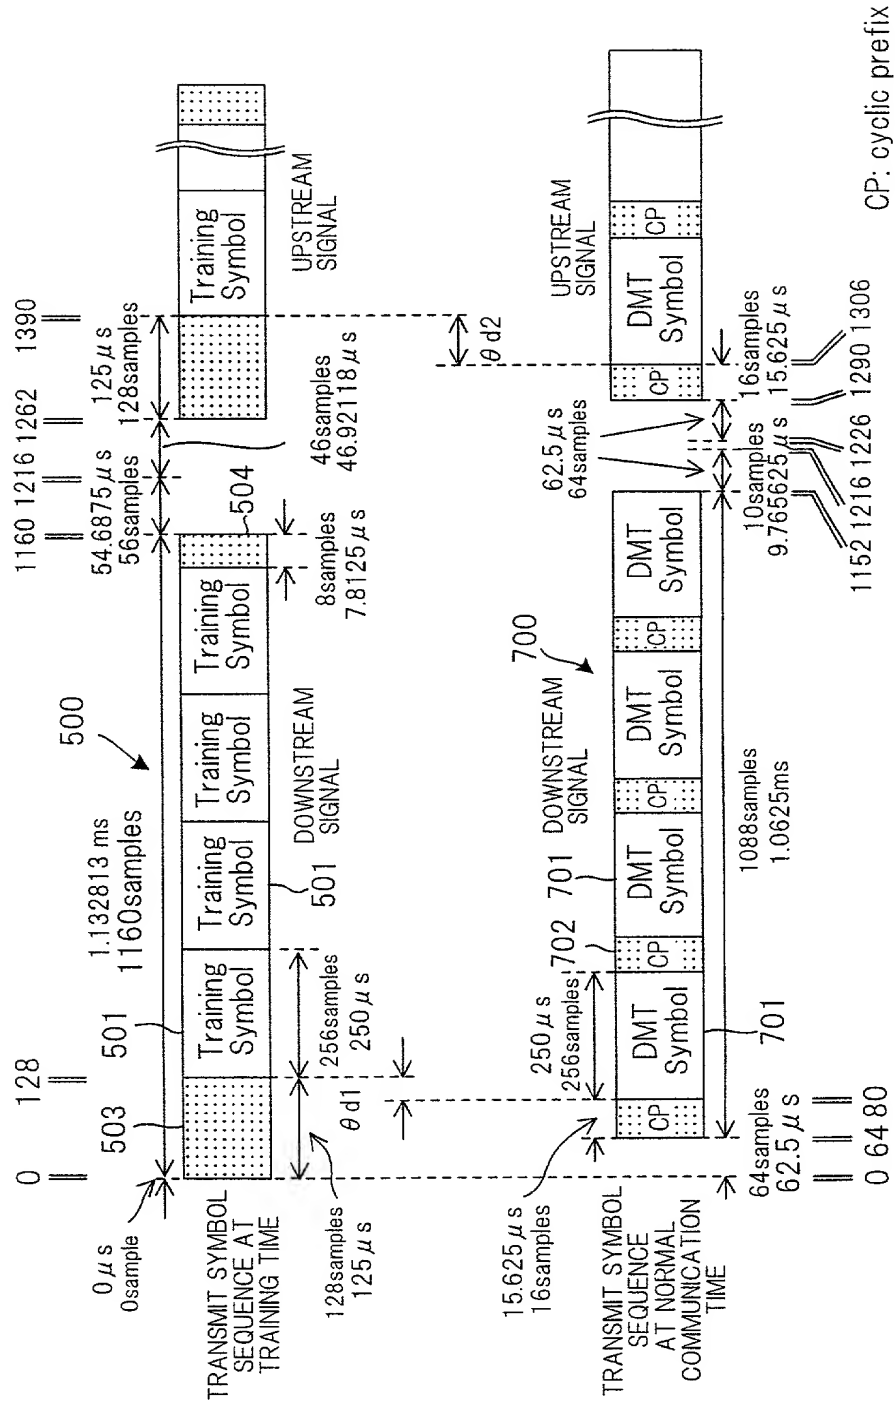


FIG. 27

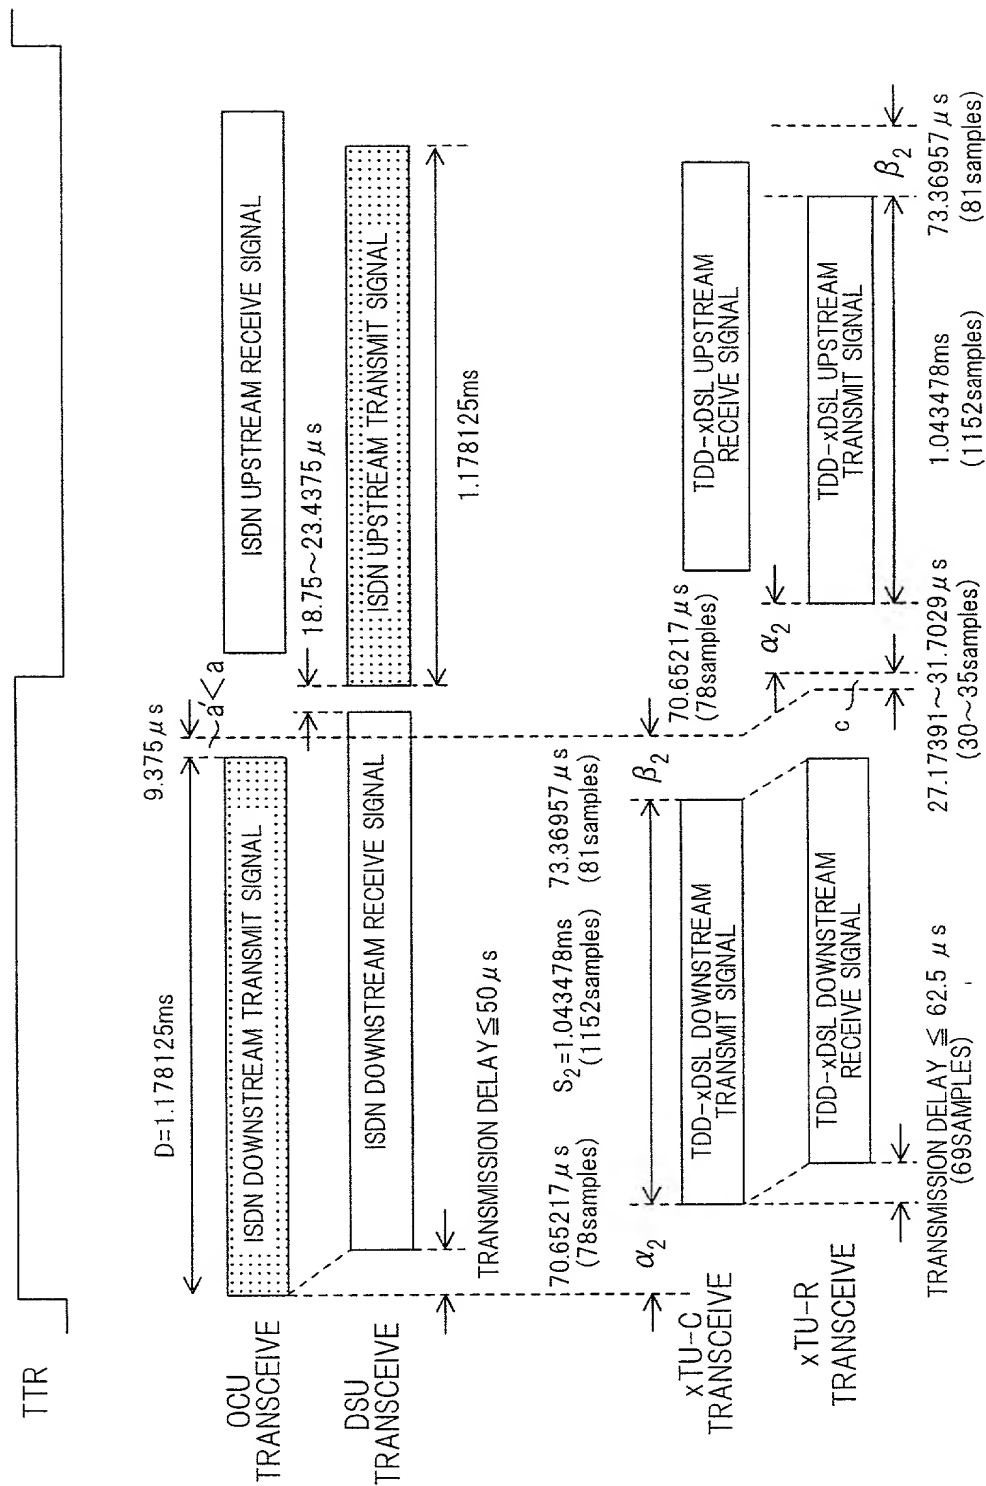


FIG. 28

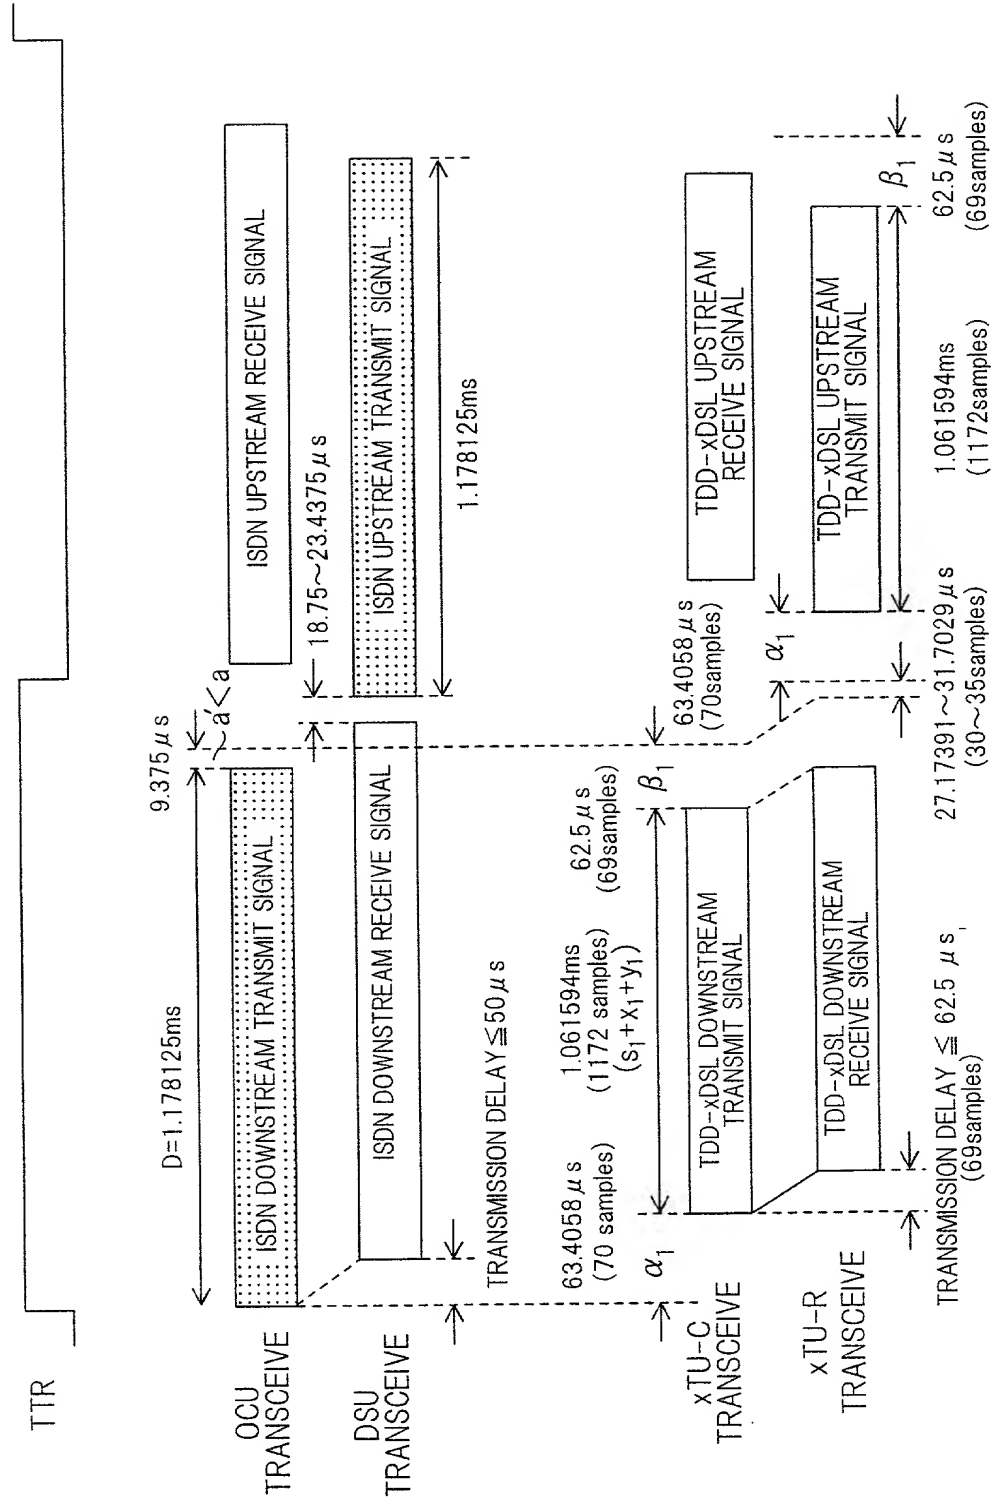


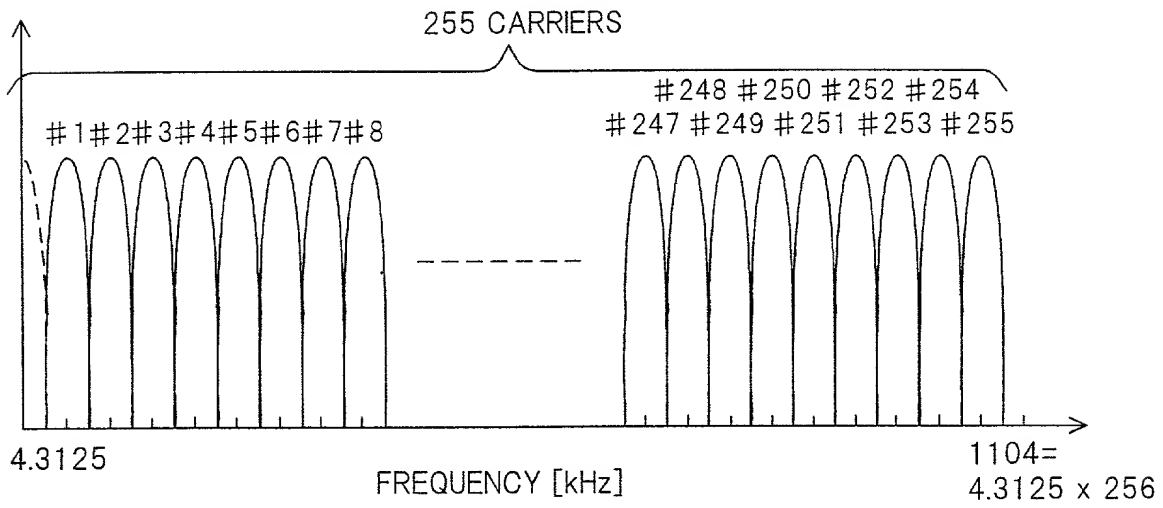
FIG. 29 PRIOR ART

FIG. 30 PRIOR ART

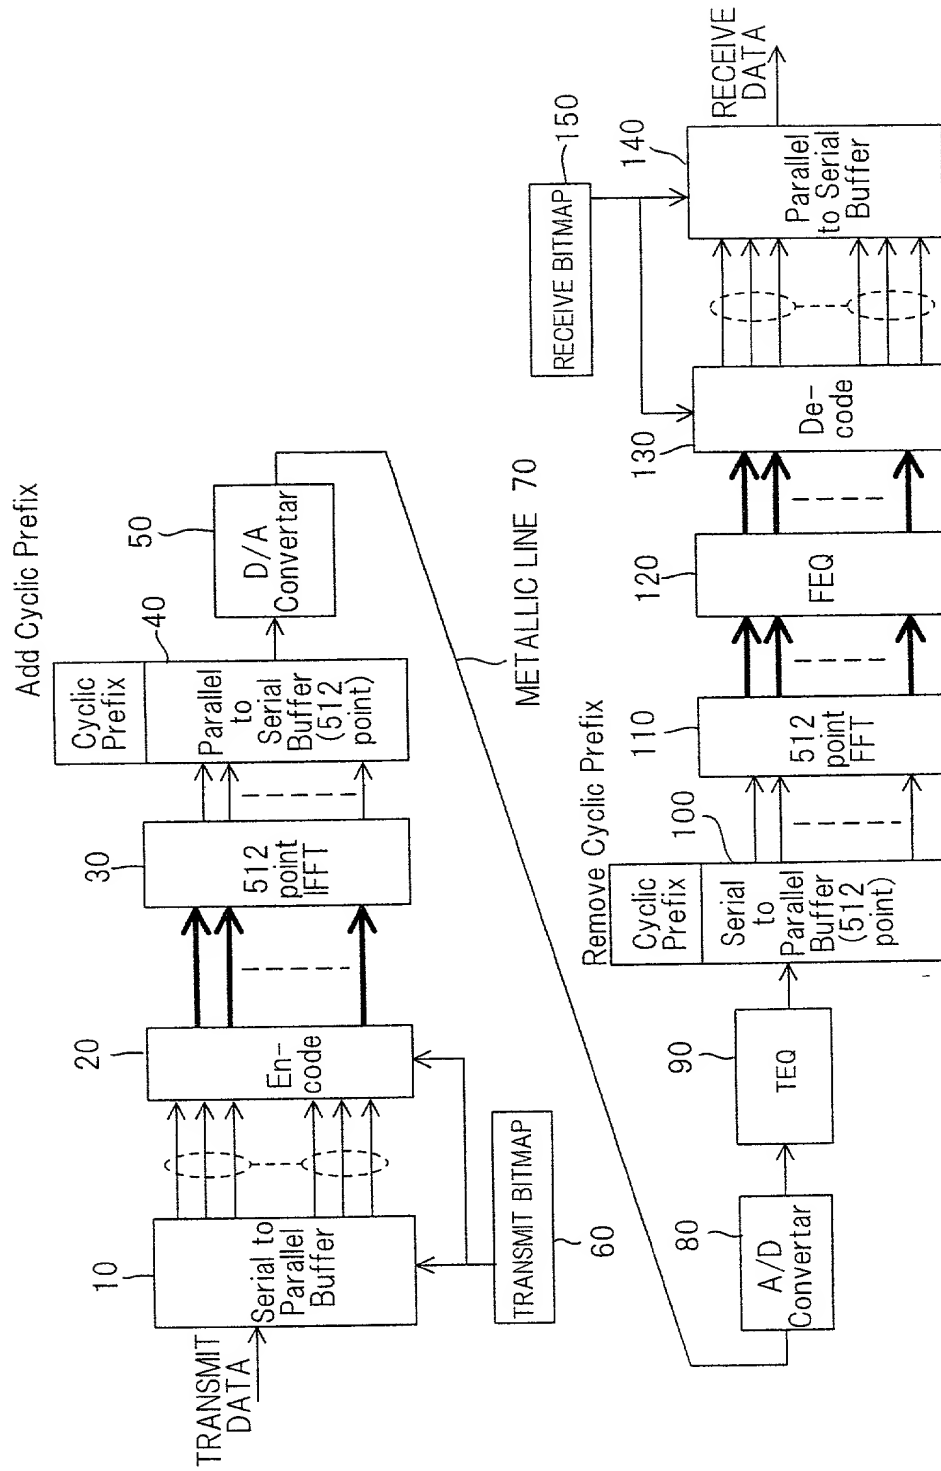


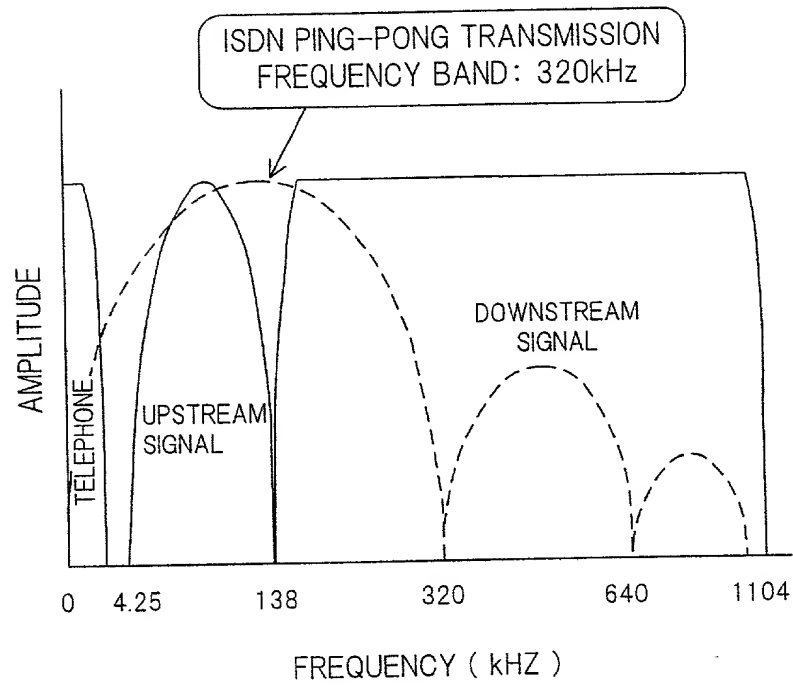
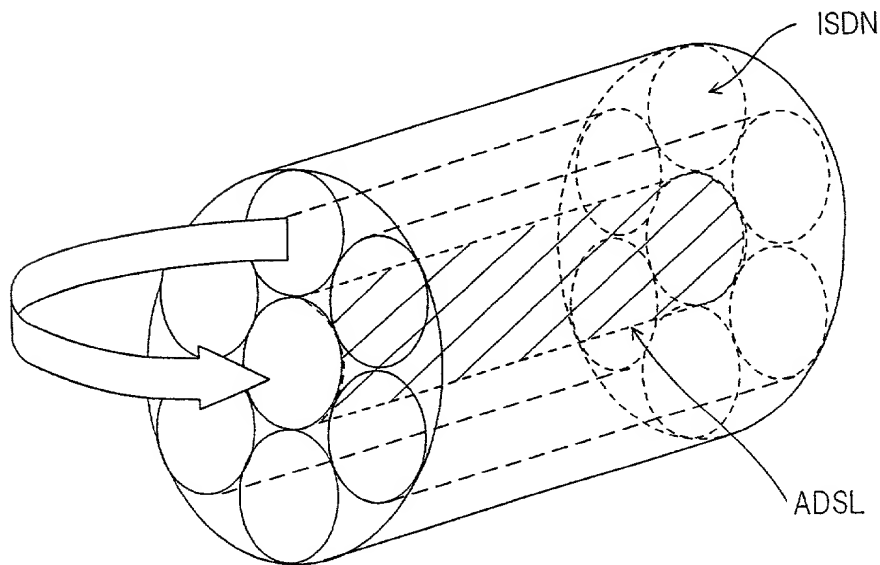
FIG. 31 PRIOR ART*FIG. 32 PRIOR ART*

FIG. 33A PRIOR ART

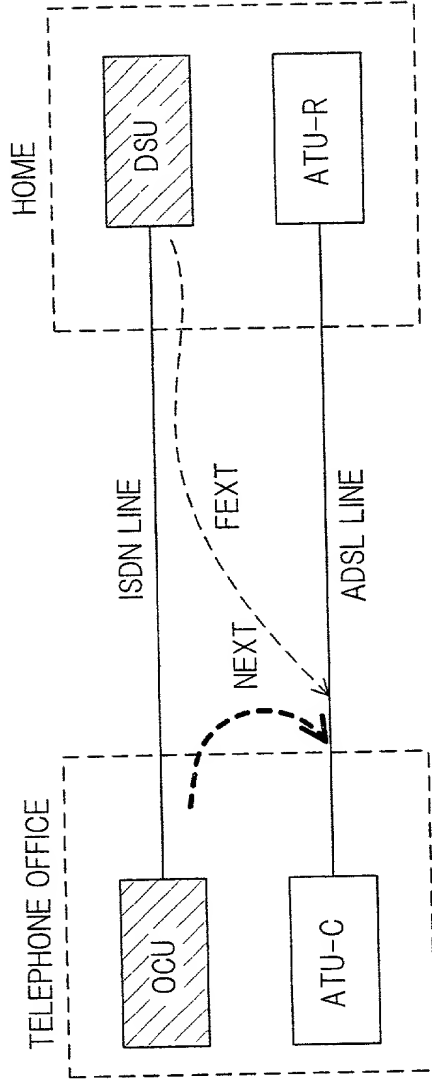


FIG. 33B PRIOR ART

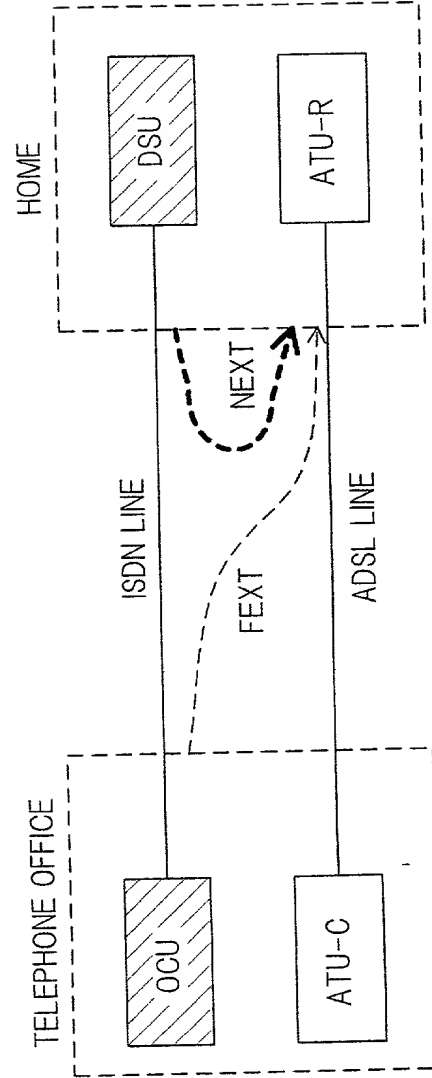


FIG. 34 PRIOR ART

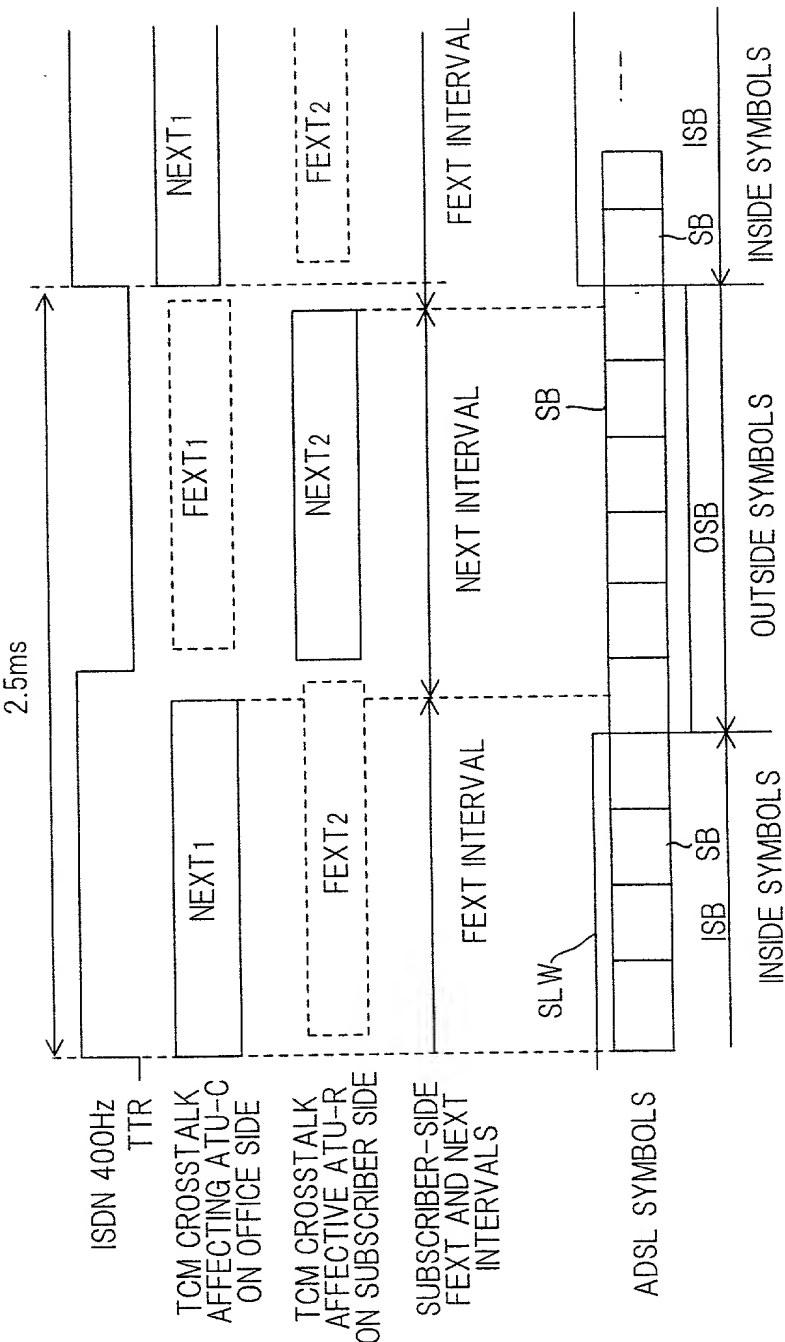


FIG. 35 PRIOR ART

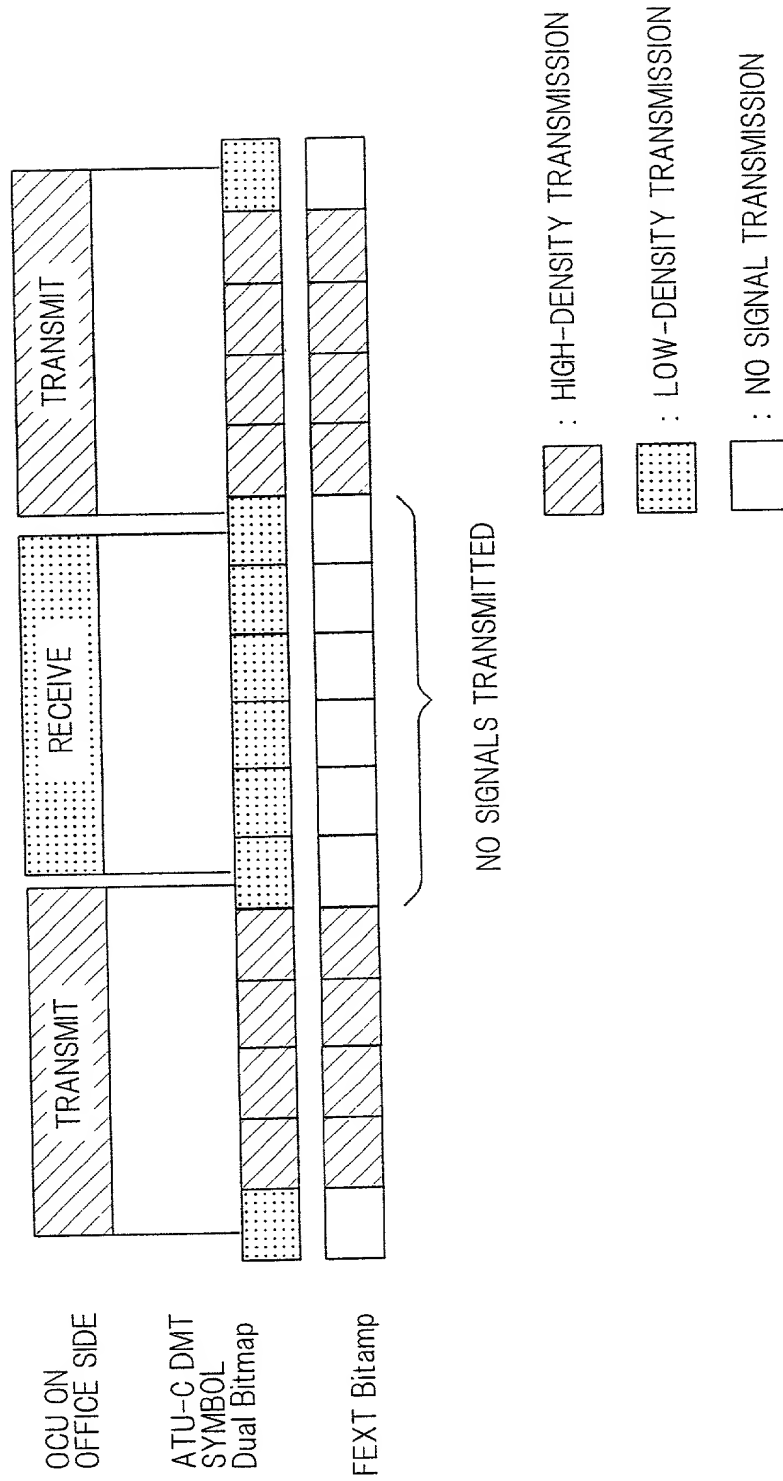
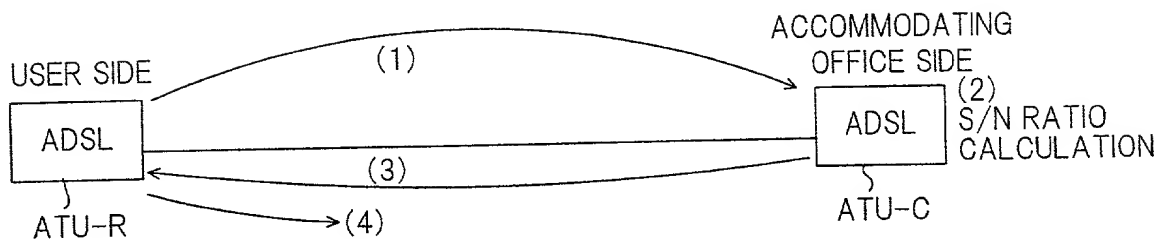


FIG. 36 PRIOR ART

004260" 2047/950

FIG. 37 PRIOR ART

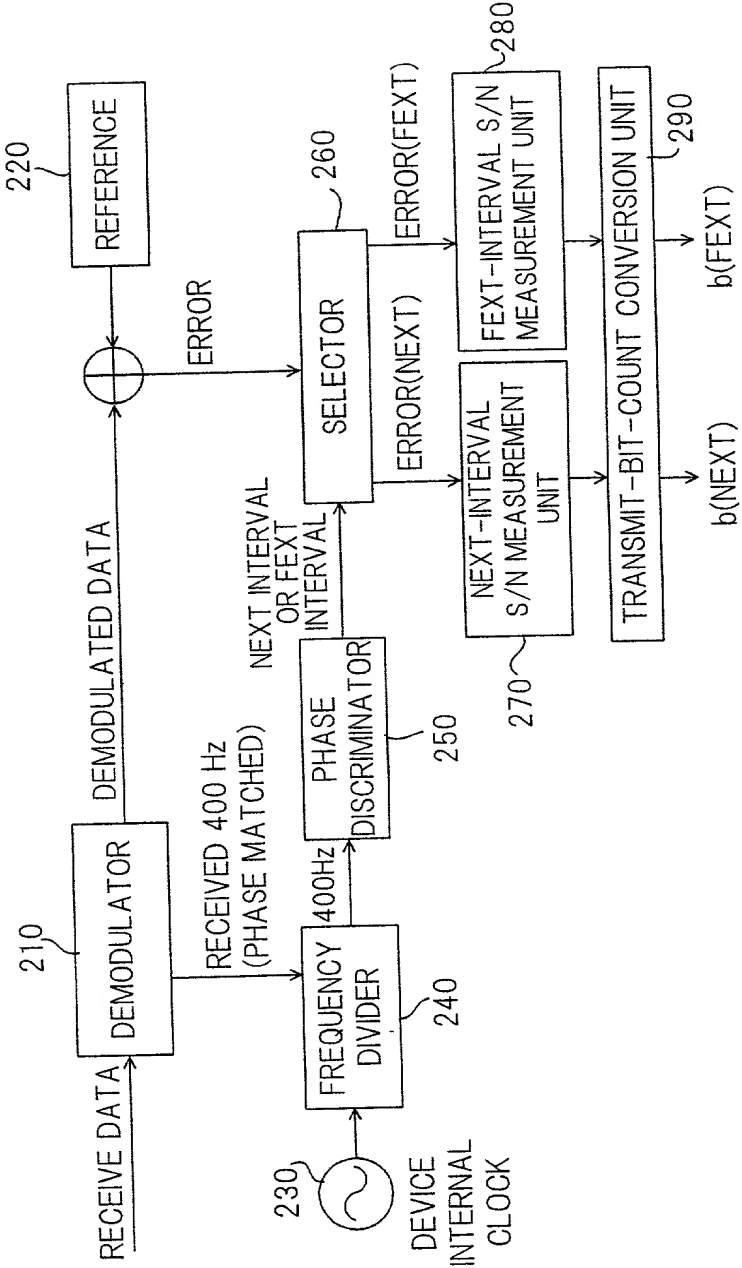


FIG. 38 PRIOR ART

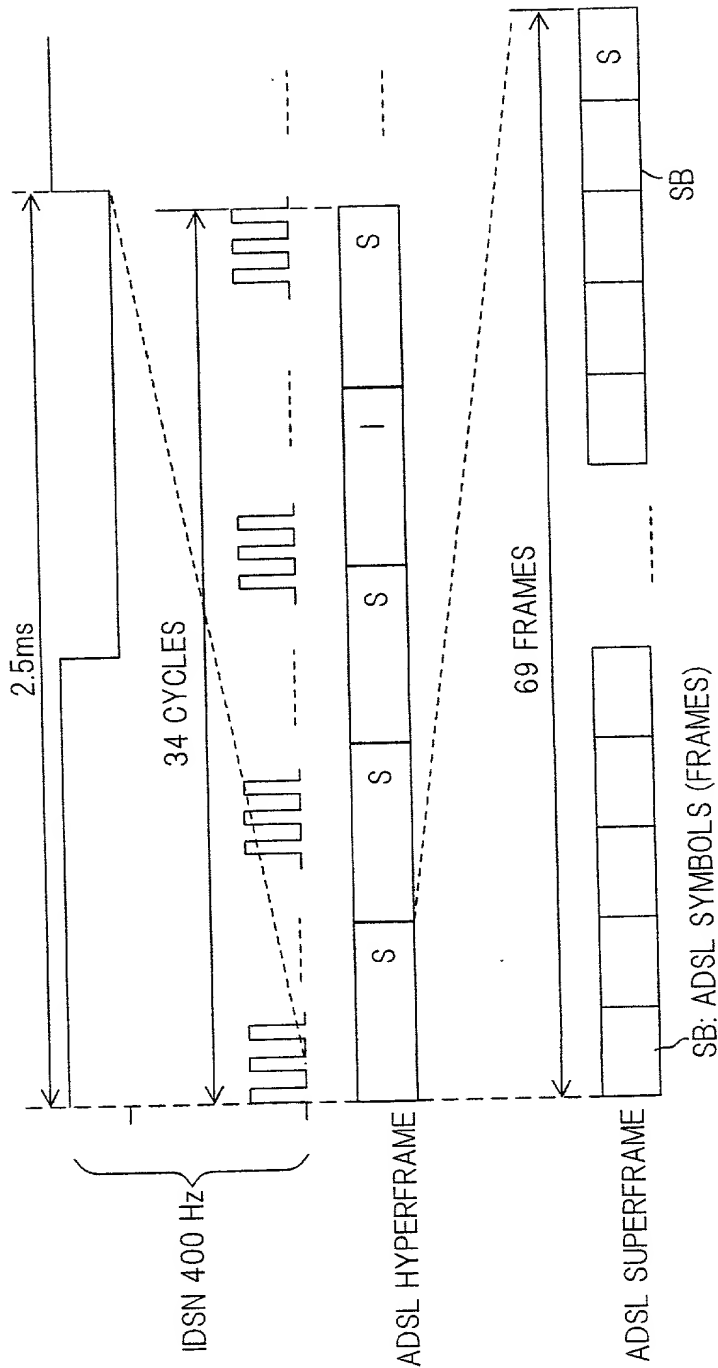


FIG. 39 PRIOR ART

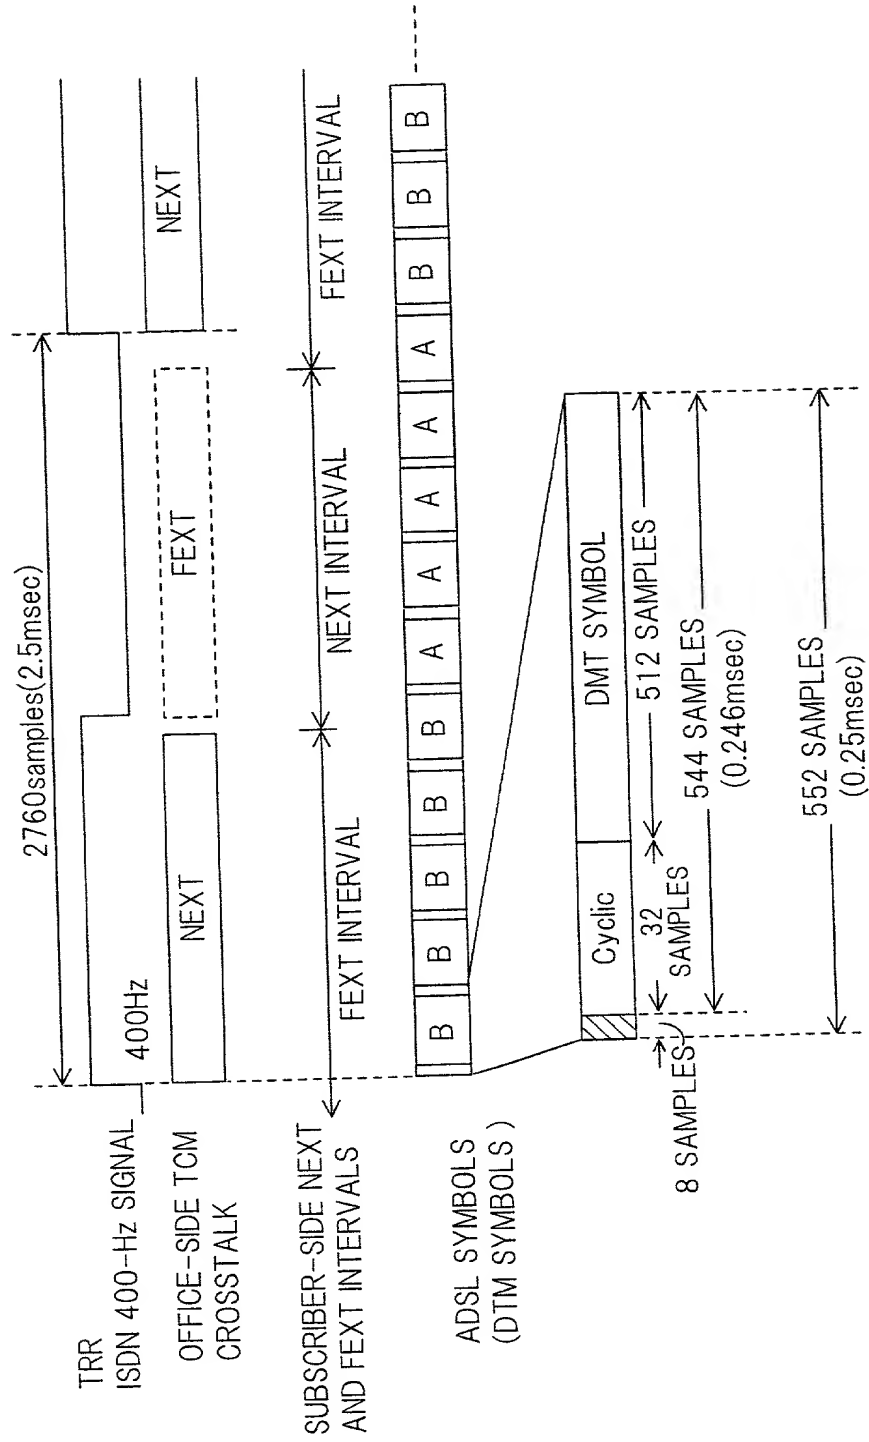


FIG. 40 PRIOR ART

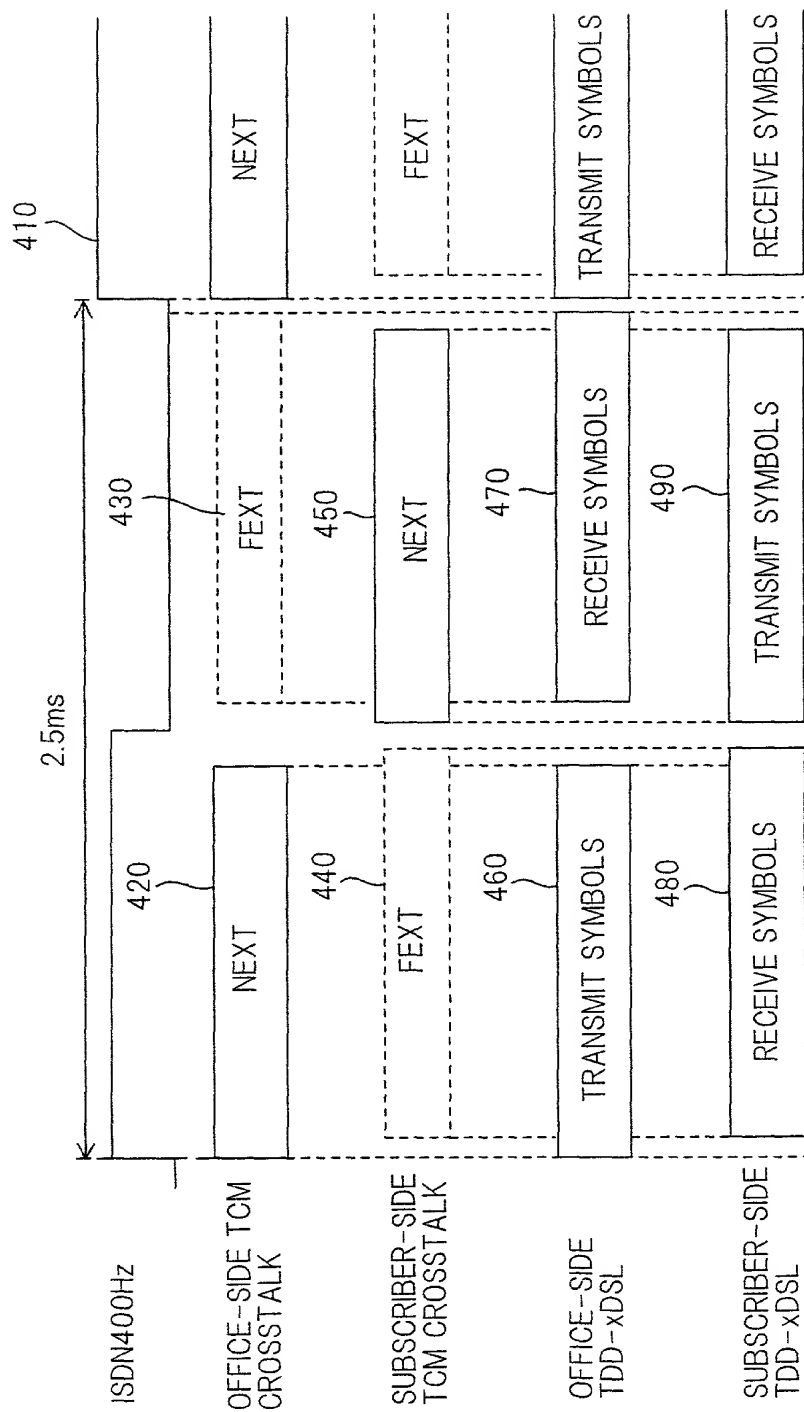


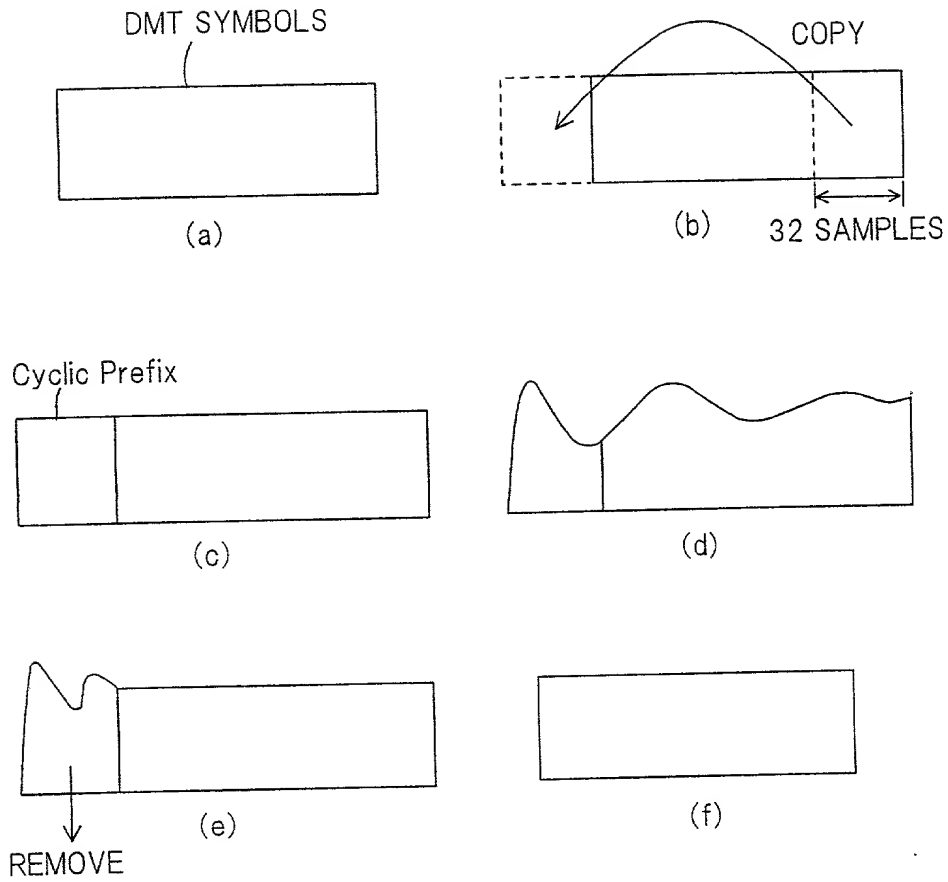
FIG. 41 PRIOR ART

FIG. 42 PRIOR ART

